INCH-
POUND

MS27074C
18 October 1999
SUPERSEDING
MS27074B
2 May 1966

DETAIL SPECIFICATION SHEET

WIRE, RETAINER

This specification is approved for use by all Departments and Agencies
of the Department of Defense.

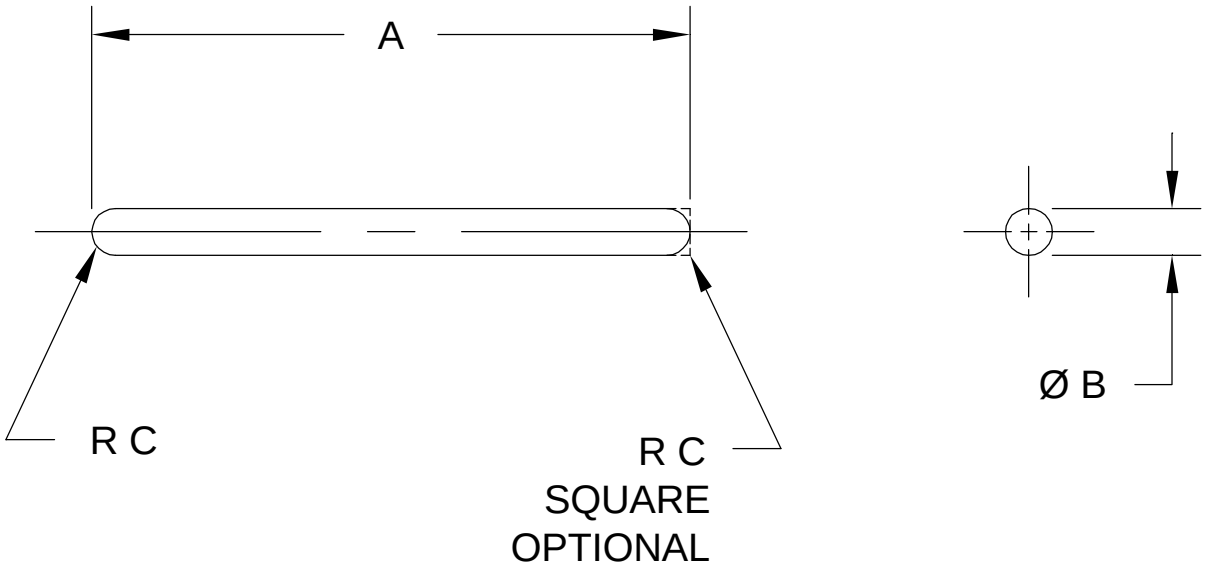

FIGURE 1. Wire retainer

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Part Identification Number (PIN)	A ±.015	B		C	
MS27074-3C	1.062	.072	+.000 -.005	.026	±.005
MS27074-4C	1.203				
MS27074-5C	1.438	.080		.030	
MS27074-6C	1.625				
MS27074-8C	2.031	.095		.037	
MS27074-10C	2.391				
MS27074-12C	2.938	.125		.050	±.010
MS27074-16C	3.703				
MS27074-20C	4.688				
MS27074-24C	5.469				

REQUIREMENTS:

1. Material: Bar: Corrosion resisting steel class 305, condition “A”, cold drawn per ASTM A-580.

2. Passivate by immersion in 2 percent solution sodium dichromate in nitric acid, concentration 15 to 25 percent by volume for 15 to 30 minutes at a temperature of 115 ±5 °F.

3. Dry film lubricate per MIL-L-46010.

4. Wire shall be straight within .020 TIM.

5. Surface roughness not to exceed 125 µ in R_a. Surface finish shall be in accordance with ASME B46.1.

6. Unless otherwise specified, radius or break all corners .005 +.005-.000. Remove all burs and slivers.

NOTES:

1. Dimensions in inches.

Custodians:
Air Force - 99
Army - AR
Navy - AS
DLA - CC

Review activities:
Army - AT
Air Force - 82

Preparing activity:
DLA - CC

(Project 4730-0832)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.