MIL-B-10930C
17 October 1983
SUPERSEDING
MIL-B-10930B(GL)
16 April 1965

MILITARY SPECIFICATION

BAG, SIGNAL EQUIPMENT, WATERPROOF

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a waterproof bag of one type and size.

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein:

SPECIFICATIONS

FEDERAL

| | | |
|---|---|---|
| A-A-203 | - | Paper, Kraft, Wrapping |
| V-T-285 | - | Thread, Polyester |
| TT-E-529 | - | Enamel, Alkyd, Semigloss |
| PPP-B-636 | - | Boxes, Shipping, Fiberboard |
| PPP-T-45 | - | Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing |

Beneficial comments ( recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

MILITARY

| | | |
|---|---|---|
| MIL-F-495 | - | Finish, Chemical, Black, for Copper Alloys |
| MIL-C-496 | - | Clips, End, Strap |
| MIL-W-530 | - | Webbing, Textile, Cotton, General Purpose, Natural or in Colors |
| MIL-B-543 | - | Buckles, Tongueless and Web Strap |
| MIL-R-6130 | - | Rubber Cellular, Chemically Blown |
| MIL-C-10351 | - | Cloth, Laminated and Coated for Waterproof Containers |

STANDARDS

FEDERAL

| | | |
|---|---|---|
| FED-STD-191 | - | Textile Test Methods |
| FED-STD-751 | - | Stitches, Seams, and Stitchings |

MILITARY

| | | |
|---|---|---|
| MIL-STD-105 | - | Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | - | Marking for Shipment and Storage |

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

| | | |
|---|---|---|
| B 633 | - | Electrodeposited Coatings of Zinc on Iron and Steel |
| D 3951 | - | Standard Practice for Commercial Packaging |

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.



Source: https://assist.dla.mil -- Downloaded: 202610-17T14:36Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.4).

3.2 Materials. Materials specified shall conform to the applicable documents and requirements specified herein.

3.2.1 Coated cloths. The coated cloths used to construct the bags shall conform to types I and II of MIL-C-10351.

3.2.2 Webbing. The webbing used in making the straps shall conform to type III, class 4 of MIL-W-530. The webbing for the shoulder straps shall be 1-1/2 inches wide and that for the cover hold-down straps shall be 1 inch wide. The color of the webbing shall be Olive Drab 7.

3.2.3 Thread. The thread shall be polyester thread conforming to type I or type II, class 1, sub-class b, size F of V-T-285.

3.2.3.1 Color. The thread shall be black and shall show fastness to weathering equal to or better than the standard sample (see 6.3). If no standard shade sample is available, the thread shall show "good" fastness to weathering.

3.2.4 Hardware.

3.2.4.1 Buckles. The buckles shall conform to type I, style 2, class 1, construction A of MIL-B-543. The shoulder strap buckles shall be size 1-1/2 inch and the cover hold-down buckles shall be size 1 inch.

3.2.4.2 End clips. The end clips for the cover hold-down straps shall conform to type I, class 1, size 1 inch of MIL-C-496.

3.2.4.3 Metal loops. The shoulder strap loops shall be made of brazed brass rod or welded steel wire 0.207 $\pm$ 0.006 inch in diameter. Design and dimensions shall be as shown in figure 5. The braze or weld shall be located at the center of one of the long sides of the loop. Brass loops shall have a black chemical finish conforming to MIL-F-495. Steel loops shall be zinc plated in accordance with class SC-3 of ASTM B 633 and then baked enameled. The enamel shall be black, conforming to class B of TT-E-529, and shall form a continuous, uniform, dry film without objectionable orange peel, wrinkles, drops, streaks, or uncovered areas.

3.2.5 Cement. The cement shall be of natural or synthetic rubber or a mixture of both, formulated to meet the requirements of this document. Reclaimed rubber shall not be used. The cement shall be clear or shall match the color of the bag.

3.2.6 Dusting material. Whiting, talc, or other finely divided mineral material which does not support mildew growth shall be used to dust exposed cement.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

3.2.7 Sponge rubber pad. The pad lining the inside bottom of the bag shall be 1/2 inch thick sponge rubber conforming to type II, grade B, soft, of MIL-R-6130.

3.3 Construction. The bag shall conform to the design and details of construction shown in figures 1 through 5 inclusive. A tolerance of ± 1/8 inch shall be allowed in all dimensions where not otherwise specified.

3.3.1 Throat, body, and other parts. The type I coated cloth specified in 3.2.1 shall be used for fabricating the throat of the bag. The type II coated cloth specified in 3.2.1 shall be used for the body and all other coated fabric parts of the bag.

3.3.2 Vent opening. The vent opening is shown on figure 3 as the letter Z and is located above the right or the left closing strap. This vent is left open during the vulcanization process to allow the free escape of gases. After completion of the vulcanization, the disks of vulcanized coated cloth shown in figure 3 are cemented over the vent (one disk on the inside, the other on the outside of the bag) to form a permanent seal.

3.4 Method of assembly. All parts shall be attached and seams and abutments shall be made by cementing before vulcanization. The throat and cover shall be cured and permanently set in the proper position. The throat shall be constructed to allow a minimum of four and one half 180° folds on the lip section before it is competely closed, excluding the fitting together of the lip. The lip, attached to the throat, shall be cured and permanently set in the proper position without distortion or wrinkles. The use of drill holes is prohibited. The sponge rubber pad specified in 3.2.7 shall be securely cemented to the inside bottom of the bag. The edges of the pad shall fit snug to the sides of the bag.

3.4.1 Stitches, seams and stitching. All stitches, seams and stitchings, shall conform to FED-STD-751, type 301 and shall be 5 to 7 stitches per inch.

3.4.1.1 Type 301 stitching. Ends of stitching shall be backstitched or overstitched not less than 1 inch (1/2 inch for box-X) except where ends are turned under or caught in other seams or stitching. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.4.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1 inch (1/2 inch for box-X) back of the end of the stitching. 1/



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

b. Thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area (1/2 inch for box-X), continue over the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.4.1.2 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of the stitching.

3.4.1.3 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.4.2 Attachment of end clips. The end of the cover hold-down strap shall be inserted the full depth of the clip. The clip shall be securely attached without cutting the webbing which shall be flat at the point of entrance.

3.5 Sealing. All edges of reinforcing strips, strap and buckle mounts, strap reinforcing sections, panels and disks cemented to the body of the bag shall be coated with cement to resist peeling. All exposed cement shall be lightly dusted with the dusting material specified in 3.2.6.

3.6 Physical requirements of finished bags.

3.6.1 Waterproofness. The finished bags shall be waterproof initially and after flexing at low temperature when tested as specified in 4.4.5.

3.6.2 Adhesion of shoulder strap mounts. The shoulder strap mounts shall not loosen or tear from the bag nor shall there by any creeping of the cemented seams initially and after flexing at low temperature when tested as specified in 4.4.5.

3.6.3 Strength of loops. The loops shall not distort or break at the weld when tested as specified in 4.4.5.

3.6.4 Low temperature resistance. The bag shall show no cracking, flaking, peeling or loosening of the seams, when tested as specified in 4.4.5.

3.6.5 Accelerated aging of seams. The seams shall not become stiff and brittle, or soft and tacky when tested as specified in 4.4.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

3.7 Labels.

3.7.1 Bag cover. The inside of each bag cover shall be permanently and legible marked in white letters 1/4 inch high with the following:

Nomenclature
Stock number
Contract number

3.7.2 Throat. The following legend shall be permanently and legibly marked in white letters 1/4 inch high on the outside of both sections of the throat near the lip:

Important: - To close, match both lips, before starting fold.
Pull firmly after each fold.

3.8 Dimensions. The inside dimensions of the finished bag shall be 12 inches in width, 9 inches in depth and 18 inches high, with a tolerance of ± 1/2 inch for each dimension.

3.9 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3 shall be removed from production and replaced with non-defective and properly matched components.

3.10 Color. Unless otherwise specified, the color of the bag shall be black (see 6.2). All rubber parts shall match each other for color.

3.11 Workmanship. The finished bags shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4 and tested for the characteristics specified in 4.4.5. The presence of any defect or failure to pass any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase documents.

4.4.1.1 Certification. The contractor shall furnish a certificate of compliance certifying that the following conform to the specified requirements:

a. The cement used is made of natural or synthetic rubber or a mixture of both and does not contain reclaimed rubber.

b. The dusting powder specified in 3.2.6 is mineral material which does not support mildew growth.

c. The test seam specified in 3.6.5 was made utilizing the same materials under the same conditions as those of the bag.

d. The metal loops are made of brass rod or steel wire.

4.4.2 In-process inspection. Examination shall be made of the following operations to establish conformance to specified requirements. Whenever nonconformance is noted, correction shall be made to the items affected, the lot in-process and to the operation. Parts which cannot be corrected shall be removed from production.

a. Dimensional examination of parts for which a cut length or size is specified to determine conformance with specified dimensions.

b. Visual examination of cut parts to remove parts containing material defects and damages (see 3.9).

c. Examination of construction details which cannot be examined in the end item.

4.4.3 End item visual examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of bags. The sample unit shall be one bag. The inspection level shall be I and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Coated cloth | Any uncoated area. | X | |
| | Poorly or insufficiently coated areas on body, throat, cover, bottom, or boot. | X | |
| | Poorly or insufficiently coated areas except on body, throat, cover, bottom or boot. | | X |
| | Any cut, hole, or tear. | X | |
| | Weak or thin places, deep abrasions, or heavy lumps: | | |
| | - affecting serviceability | X | |
| | - affecting serviceability, but not seriously. | | X |
| | Permanent embedded wrinkles or creases, resulting in weakened area, poor adhesion or blisters. | X | |
| | Any blister, tunnel, or wrinkle on coating at either side of fabric. | X | |
| Vulcanizing | Not vulcanized. | X | |
| | Burned or scorched gum. | X | |
| | Coating or cement tacky. | X | |
| | Any area definitely pitted, cracked, or chipped: | | |
| | - affecting serviceability | X | |
| | - affecting serviceability but not seriously. | | X |
| Seams: | | | |
| On seams joining throat halves | Loose, i.e., delaminated: | | |
| | - more than 1/2 inch in length, but less than 1/4 inch in depth. | X | |
| | - more than 1/8 inch in length, and in excess of 1/4 inch in depth. | X | |
| | - 1/8 to 1/2 inch in length, but less than 1/4 inch in depth. | | X |
| All other seams | Loose, i.e., delaminated: | | |
| | - more than 1/2 inch in length, and in excess of 1/4 inch in depth. | X | |
| | - more than 1/2 inch in length, and 1/4 inch or less in depth. | | X |
| | - 1/8 to 1/2 inch in length, and in excess of 1/4 inch in depth. | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Webbing | Not type specified. | X | |
| | Cut, frayed, or scalloped edges. | X | |
| | Color not OD-7. | | X |
| Hardware: | | | |
| General | Broken or malformed, protective finish omitted, corroded areas, burrs, or sharp edges. | X | |
| End clips | Improperly clinched, causing edges of webbing to curl excessively and to leave clip corners unfilled. | | X |
| | Clinched excessively tight, cutting webbing. | X | |
| Buckles | Any buckle reversed: | | |
| | - seriously affecting serviceability | X | |
| | - affecting serviceability, but not seriously. | | X |
| Metal loops | Not welded or brazed (as applicable). | X | |
| | Weld or braze not in specified location: | | |
| | - seriously affecting serviceability | X | |
| | - affecting serviceability, but not seriously. | | X |
| Cement | Not clear or does not match color of the bag. | | X |
| Stitching: | | | |
| Open stitching | Up to 1/2 inch. | | X |
| | More than 1/2 inch. | X | |
| | NOTE: Stitching shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. | | |



Source: https://assist.dla.mil -- Downloaded: 202610-17T14:36Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Stitching: (cont'd) | | | |
| Runoffs (see open stitching) | Wrong stitch type:<br>- seriously affecting serviceability | X | |
| | - affecting serviceability, but not seriously. | | X |
| Stitch tension | Loose, resulting in loosely exposed bobbin or top thread; tight, resulting in puckering of fabric or tightness of webbing on stitching. | | X |
| Stitches per inch | One to two stitches less than minimum specified. | | X |
| | Three or more stitches less than minimum specified. | X | |
| | One or more stitches in excess of maximum specified. | | X |
| NOTE: | Variation in the number of stitches per inch caused by the operator speeding up the machine and pulling the material in order to sew over heavy places or heavy seams, or turning corners shall be classified as follows:<br>(a) Within the minor defect classification - no defect.<br>(b) Within the major defect classification - minor defect. | | |
| Stitching ends | Not backstitched or secured as specified. | | X |
| Thread breaks | Not overstitched as specified. | | X |
| NOTE: | Thread breaks not overstitched shall be classified as open stitching. | | |
| Cross box stitching | One row of stitching omitted. | | X |
| | Two or more rows of stitching omitted. | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Components and assembly | Any defect of component or assembly (not specifically classified): | | |
| | - seriously affecting serviceability or appearance | X | |
| | - affecting serviceability or appearance but not seriously. | | X |
| | Any required component or part of bag omitted or not as specified: | | |
| | - seriously affecting serviceability or appearance | X | |
| | - affecting serviceability or appearance but not seriously. | | X |
| Construction | Any required detail of construction omitted or not as specified: | | |
| | - seriously affecting serviceability | X | |
| | - affecting serviceability but not seriously. | | X |
| Throat assembly | Type of material (type I) not as specified. | X | |
| | Seams not as specified. | X | |
| | One inch wide fin not formed on one or both sides of throat at area "D" (see figure 4). | X | |
| | Not formed or not attached to body as specified: | | |
| | - seriously affecting serviceability, i.e., prevent formation of 4-1/2 folds (180°) | X | |
| | - affecting serviceability, but not seriously. | | X |
| Lip | 2-1/2 inch strip forming back lip attached to front. | | X |
| | Back lip not folded or not creased as specified. | | X |
| | Front top edge of throat not flush with creased edge of back lip, failing to provide a smooth closure of lips. | | X |
| | Ends of back lip not formed as specified. | | X |



Source: https://assist.dla.mil -- Downloaded: 202610-17T14:36Z
Check the source to verify that this is the currentversion before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Throat assembly (cont'd) | | | |
| Lip reinforcement | Misplaced, failing to reinforce corners of lip securely. | X | |
| | Top edge not flush with top edge of front lip by 1/8 inch or more. | | X |
| Throat reinforcing disks | Misplaced, failing to reinforce corners of throat securely. | X | |
| Cover and bag: | | | |
| General | Type of material (type II) not as specified. | X | |
| Cover | Too small, failing to accommodate body. | X | |
| Body of cover | Improperly formed or attached to body, failing to close properly with throat folded. | X | |
| Hinge reinforcing disks "Y" | Misplaced, failing to reinforce corners of hinge. | X | |
| Corner reinforcing disks "F" | Edges extending less than 1-1/4 inches, or more than 1-3/4 inches from corners of cover. | | X |
| | Folded edges of disks uneven with creased edge of cover by 1/8 inch or more. | | X |
| | Excess portion of disks not folded or securely cemented. | X | |
| Buckle mount disks "W" | Folded edges of disks not flush with edge of cover. | | X |
| | Set off center of front or sides of cover by 1/4 inch or more. | | X |
| Buckle mounts "V" | Any mount single ply construction. | X | |
| | Mount not threaded through end bar of buckle, failing to serve intended purpose. | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Cover and bag (cont'd) | | | |
| Corner reinforcing strips "C" | Width of strips not within specified tolerances (figure 3). | | X |
| | Not centered with corners, so that one side of strip is noticeably wider or narrower than opposite side. | | X |
| | Set entirely outside of corner area, failing to reinforce body corners. | X | |
| Cross strip "E" | Misplaced, failing to reinforce seams attaching boot to body. | X | |
| Bottom reinforcing disks | Edges of inner dsks extending less than 1-3/4 inches or more than 2-1/4 inches from corner of bag. | | X |
| | Edges of outside disks extending less than 1-1/4 inches or more than 1-3/4 inches from corner of bag. | | X |
| | Folded edge of disks uneven with creased edge of bottom by 1/8 inch or more. | | X |
| | Excess portion of disks not folded or not securely cemented. | X | |
| Hold down straps "P" | Set out of alignment with corresponding buckle on cover, failing to effect a smooth closure. | X | |
| | Tab portion of strap not securely attached under patch "S". | X | |
| | Not stitched to tab as indicated on figure 5. | | X |
| Shoulder strap assembly: | | | |
| Strap mounts "L" | Single ply construction. | X | |
| | Stitching across mounts at location of loop omitted. | | X |
| | Either end of mount not cross box stitched to 3 inch by 5 inch inner patch. | X | |
| NOTE: | Stitching is not visible on outside of bag, but its outline can be seen or felt through Panel "N". | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Shoulder strap assembly: | | | |
| Shoulder strap "H" | Either strap not adjustable in length, i.e., stitched to body of bag without buckles. | X | |
| | Strap tabs and tab end of straps not attached to sides of bag as indicated in Section A-A, figure 5. | X | |
| Vent "Z" | Vent disks misplaced, failing to completely cover vent opening. | X | |
| NOTE: | Vent opening is required to be covered by a disk on inside and outside of bag (see 3.3.2). | | |
| Sponge rubber pad (inside bottom) | Not securely cemented to bottom of bag. | X | |
| | Too small, leaving spaces between any side of bag and pad, or too large, resulting in poor fit of pad in bag. | | X |
| Marking (identification on cover, legend on throat) | Omitted, illegible, incorrect or misplaced. | | X |
| | Not permanent, i.e., can be rubbed off with moistened thumb. | | X |
| Color of bag | Not black or color specified. | | X |
| | Rubber parts do not match | | X |

4.4.4 End item dimensional examination. The end item shall be examined for conformance to the inside dimension specified in 3.8 and throat dimensions A, B, C, and D specified in figure 4. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of bags. The sample unit shall be one bag. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 End item testing. The end item shall be tested for the characteristics indicated in table I. The lot size shall be expressed in bags. The sample unit, for all characteristics except accelerated aging of seams, shall be two bags and the inspection level shall be S-3. For the accelerated aging of seams test, the sample shall consist of one sample seam 6-inches long made up during production of the inspection lot using the same materials and under the same conditions as the bags in that lot. The lot shall be unacceptable if any sample unit or the sample seam fails to meet any requirement specified.



Source: https://assist.dla.mil -- Downloaded: 20261O-17T14:36Z
Check the source to verify that this is the current version before use.

4.4.5.1 Sequence of testing. From each sample unit, one bag shall be used for the:

Initial waterproofness test
Initial adhesion of shoulder strap mount test
Strength of metal loops test

and the other bag shall be used for the:

Low temperature resistance test
Waterproofness after flexing at low temperature test
Adhesion of shoulder strap mount after flexing at low temperature test.

TABLE I. End item tests

| Characteristic | Requirement paragraph | Test method | Number of determinations per sample unit | Results reported as |
|---|---|---|---|---|
| Initial waterproofness | 3.6.1 | 4.5.1 | 1 | Pass or fail |
| Initial adhesion of shoulder strap mount | 3.6.2 | 4.5.2 | 1 | Pass of fail |
| Strength of metal loops | 3.6.3 | 4.5.3 | 1 | Pass or fail |
| Low temperature resistance | 3.6.4 | 4.5.4 | 1 | Pass or fail |
| Waterproofness after flexing at low temperature | 3.6.1 | 4.5.4 and 4.5.1 | 1 | Pass or fail |
| Adhesion of shoulder strap mount after flexing at low temperature | 3.6.2 | 4.5.4 and 4.5.1 | 1 | Pass or fail |
| Accelerated aging of seams | 3.6.5 | 4.5.5 | 1/ | Pass or fail |

1/ One sample seam shall be tested for each inspection lot.

4.5 Tests.

4.5.1 Waterproofness. Bags shall be weighted, closed and immersed in water so that the highest part of each bag is under 12 inches of water. After an immersion period of 6 hours, the bags shall be removed, laid flat on their side and opened carefully so that water trapped in the folds of the throat will drain off and not enter the bag. The inside of the bags shall then be examined for any evidence of leakage.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

4.5.2 Adhesion of shoulder strap mount. The bag, containing 100 pounds of weight, shall be suspended from a bar by the shoulder straps for a period of 2 hours. The weight shall then be removed and each of the shoulder strap mounts shall be examined for loosening or tearing and for creeping of cemented seams.

4.5.3 Strength of loops. After the bag has been tested in accordance with 4.5.2, each of the metal loops shall be examined for distortion of the loop and breakage of the weld or braze.

4.5.4 Resistance to low temperature. The bags shall be conditioned for 4 hours at a temperature of minus 60° ± 3°F. While still at this temperature, the bags shall be flexed in the following manner. With the cover of the bag closed, the short sides of the bag shall be grasped at the top, compressed horizontally so that the opposite sides touch on the inside and then released. This operation shall be performed five times within 3 minutes. The bags shall be examined for cracking and flaking of the coating or peeling or loosening of the seams, and then tested as specified in 4.5.1 and 4.5.2. Prior to testing, as specified in 4.5.1 and 4.5.2, the bags shall be allowed to reach equilibrium with room temperature and allowed to thoroughly dry before testing for waterproofness after flexing at low temperature.

4.5.5 Accelerated aging of seams. The sample seam shall be tested in accordance with Method 5852 of FED-STD-191 except that the exposure period shall be 96 hours. At the end of the exposure period, the seam shall be visually examined to determine if the coating or the cement has become stiff and brittle or soft and tacky.

4.5.6 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Examination of closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

| Examine | Defect |
|---|---|
| Marking (exterior and interior) | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |
| Materials | Any component missing, damaged or not as specified. |
| Workmanship | Inadequate application of components, such as incomplete closure of container flap, loose strapping, improper taping, or inadequate stapling. |
| Content | Number of bags per container is more or less than specified. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

A-250 Adhesive, Water-Resistant (for Closure of

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. The throat of each bag shall be folded (not rolled) and neatly tucked inside the bag. The cover shall be closed and strapped in place. The shoulder straps shall be folded flat against the back surface of the bag. The bag shall then be completely wrapped in 60-pound minimum basis weight kraft paper conforming to type I of A-A-203. The paper wrap shall be secured with 2-inch minimum width tape conforming to type III, grade B of PPP-T-45.

5.1.2 Commercial. The bags shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A or Commercial as specified (see 6.2).

5.2.1 Level A packing. Six bags, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Level A unit packs shall be packed upright three in length, two in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 30-1/2 inches in length, 26-1/2 inches in width and 19 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced in accordance with the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.5.6.

5.2.2 Level B packing. Six bags, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be packed upright, three in length, two in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 30-1/2 inches in length, 26-1/2 inches in width and 19 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.5.6.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.5.6.

5.2.3 Commercial packing. Bags, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The bag is primarily intended for carrying signal equipment. However, it may also be used to carry Military instruments, medical supplies, or other gear requiring the degree of protection provided.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this document.
b. When a first article sample is required (see 3.1, 4.3, and 6.4).
c. Whether color other than black is required (see 3.10).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to standard shade samples of thread, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample. The quantity of items required should be as specified in the contract. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

Project No. 8465-0868

Review activities:

Army - MD
Navy - MC
Air Force - 82
DLA - CT



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

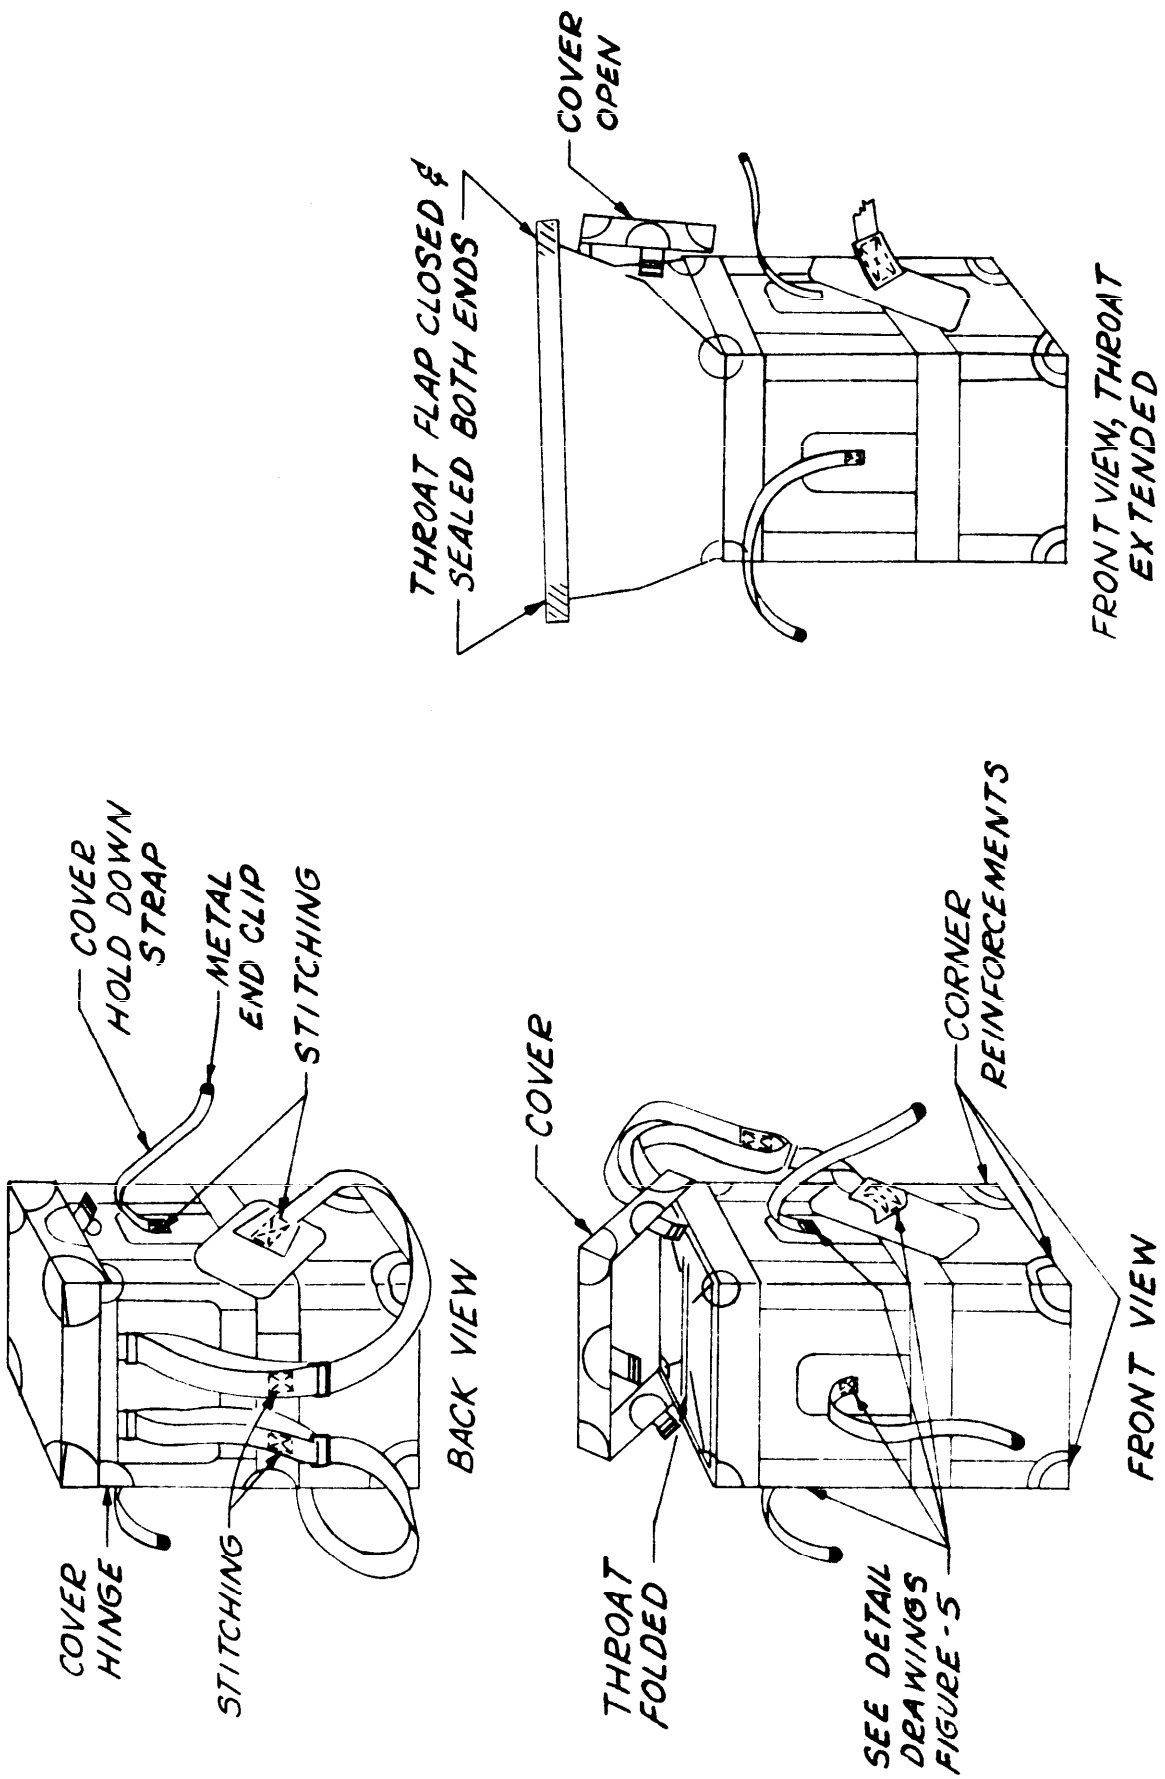



FIGURE 1 - BAG, WATERPROOF, SIGNAL EQUIPMENT



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.


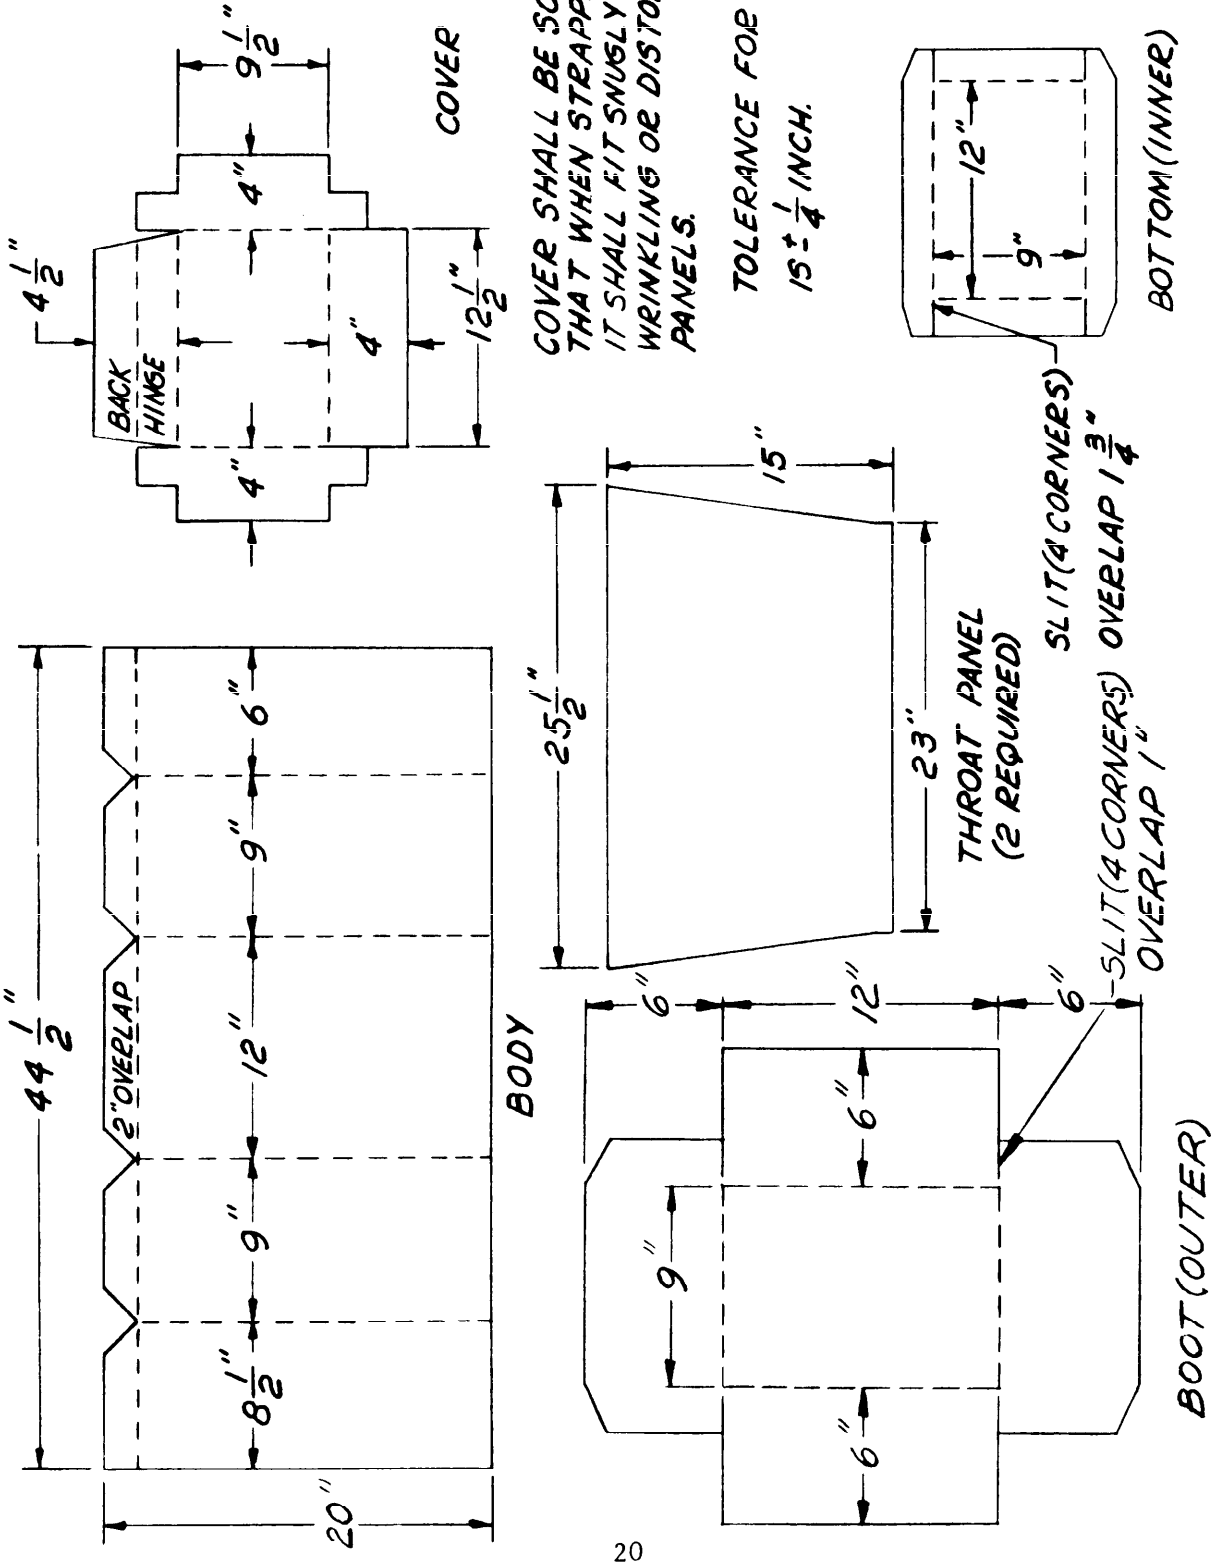




FIGURE -2 MAIN COMPONENT PARTS OF BAG

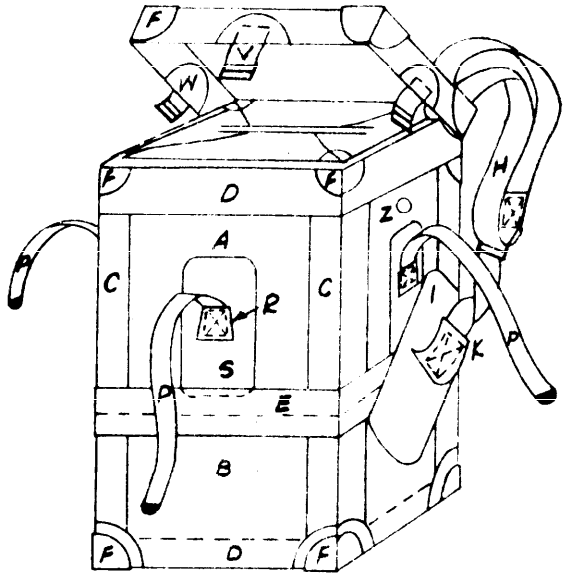

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:36Z
Check the source to verify that this is the current version before use.



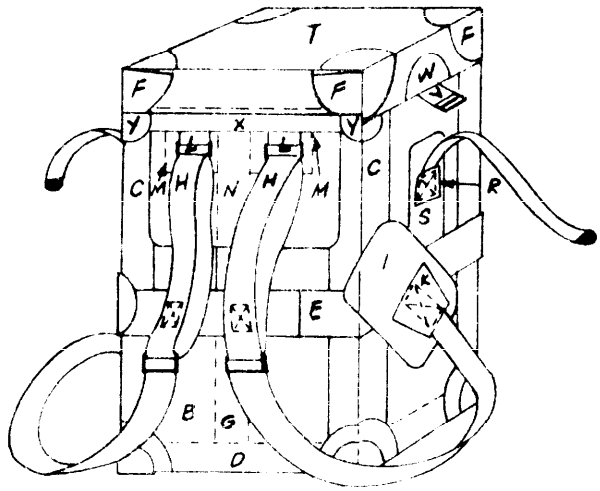
FRONT VIEW




BACK VIEW

| | PIECE | NUMBER OF PIECES | DIMENSIONS, INCHES | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | | LENGTH | TOLERANCE | WIDTH | TOLERANCE | DIAMETER | TOLERANCE |
| A | BODY | 1 | | | SEE FIGURE 2 | | | |
| B | BOOT (OUTER) | 1 | | | SEE FIGURE 2 | | | |
| C | CORNER REINFORCING STRIPS | INNER OUTER 4 4 | BOTH 17 1/4 | 1/4 | INNER OUTER 2 3 | 1/8 | | |
| D | TOP AND BOTTOM STRIPS | INNER OUTER 2 2 | INNER OUTER 43 43 | 1/4 | INNER OUTER 1 1/2 2 | 1/8 | | |
| E | CROSS STRIP | 1 | 44 | 1/4 | 2 | 1/8 | | |
| F | CORNER REINFORCING DISKS | INNER OUTER 4 12 | | | | | INNER OUTER 4 3 | 1/4 |
| G | BODY SEAM STRIP | 1 | 18 | 1/4 | 1 1/2 | 1/8 | | |
| H | SHOULDER STRAPS | 2 | 50 | 1.0 | 1 1/2 | | | |
| I | SHOULDER STRAP REINFORCING PATCHES | INNER OUTER 2 2 | INNER OUTER 6 1/2 8 | 1/4 | INNER OUTER 4 5 | 1/4 | | |
| K | SHOULDER STRAP HOLDING TABS | 4 | 3 | 1/8 | 2 1/2 | 1/8 | | |
| L | SHOULDER STRAP LOOP MOUNTS 1/ | 3 | 4 | 1/4 | 1 1/2 | 1/8 | | |
| M | LOOP MOUNT REINF PATCHES 1/ | 2 | 5 | 1/4 | 3 | 1/4 | | |
| N | SHOULDER STRAP REINF PANEL | 1 | 10 | 1/2 | 6 | 1/2 | | |
| P | COVER HOLD-DOWN STRAPS | 3 | 10 | 1 | 1 | | | |
| R | COVER HOLD-DOWN STRAP TABS | 6 | 2 1/2 | 1/4 | 2 | 1/8 | | |
| S | COVER STRAP REINFORCING PATCHES | INNER OUTER 3 3 | INNER OUTER 5 1/2 6 1/2 | 1/4 | INNER OUTER 3 4 | 1/4 | | |
| T | COVER | 1 | | | SEE FIGURE 2 | | | |
| V | BUCKLE MOUNTS 2/ | 3 | 3 | 1/4 | 1 | 1/8 | | |
| W | BUCKLE MOUNT REINF DISKS 2/ | 3 | | | | | 3 | 1/4 |
| X | HINGE REINFORCING STRIP | 1 | 12 | 1/4 | 1 | 1/8 | | |
| Y | HINGE REINFORCING DISKS | 2 | | | | | 3 | 1/4 |
| Z | VENT DISK (VULCANIZED) | INNER OUTER 1 1 | | | | | 1 1/4 | 1/8 |


NOTES: 1/ SHOULDER STRAP LOOP MOUNT SHALL BE DOUBLED OVER PIECE, CROSS-SEWED 1/4 INCH FROM METAL LOOP, THEN SPREADING UPWARD AND DOWNWARD 2 INCHES AND SEWED BOX STITCH TO AN INNER PATCH (M) UNDER PANEL N.

2/ BUCKLE MOUNT SHALL BE A DOUBLED-OVER PIECE EXTENDING 1 INCH ON EACH SIDE OF COVER UNDERNEATH SLOTTED DISK.


FIGURE 3 - PIECE DIMENSIONS



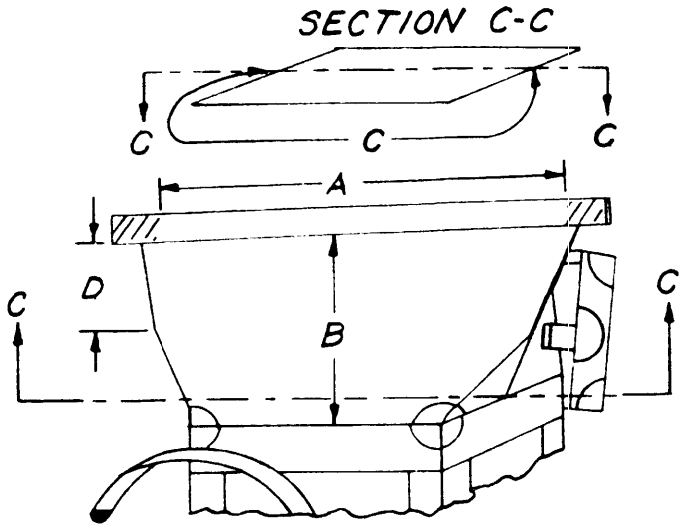Source: https://assist.dla.mil -- Downloaded: 202610-17T14:36Z
Check the source to verify that this is the current version before use.




| DIMENSIONS, INCHES | | | |
|---|---|---|---|
| A | B | C | D |
| 22.5 | 12.5 | 21.0 | 7.5 |

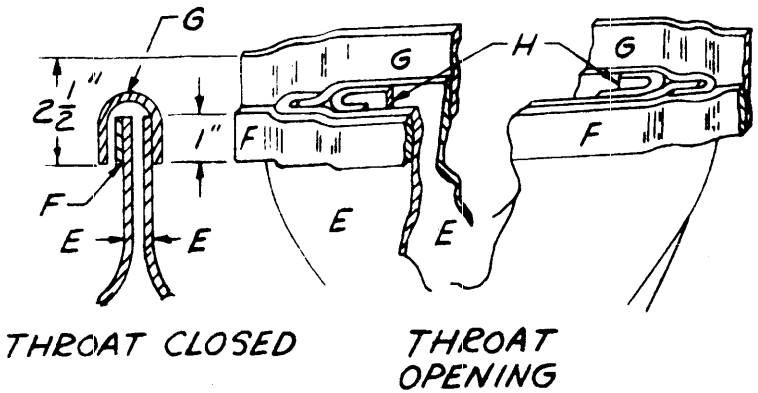


THROAT IS FORMED BY JOINING TWO HALVES (SEE FIGURE 2) BY A 3/4 INCH OVERLAPPED SEAM ON EACH SIDE. AT AREA D ON EACH SIDE, THE OVERLAPPING SEAM IS FORMED INTO A THIN 1 INCH WIDE FIN, CEMENTED SECURELY INTO PLACE TO PERMIT PROPER ACCESS INTO THE THROAT SEAL. LIP IS FORMED BY ATTACHING A SEPARATE 2 1/2 INCH WIDE STRIP TO TOP OF BACK THROAT PANEL. THIS STRIP EXTENDS 2 INCHES AT EACH END BEYOND THROAT DIMENSION A AND IS CREASED IN THE CENTER TO TO FORM AN OPEN LIP. IF NECESSARY IT MAY BE CEMENTED AT ENDS. A 7/8 INCH WIDE STRIP IS ATTACHED TO THE TOP OF FRONT THROAT PANEL. A 7/8 INCH REINFORCING STRIP IS CEMENTED TO THE INSIDE OF EACH CORNER OF THE THROAT OPENING.


| | PIECES | NUMBER OF PIECES | DIMENSIONS, INCHES | | | |
|---|---|---|---|---|---|---|
| | | | LENGTH | TOLERANCE | WIDTH | TOLERANCE |
| E | THROAT PANEL | 2 | SEE FIGURE 2 | | | |
| F | FRONT LIP REINFORCING STRIP | 1 | 26 1/2 | 1/4 | 7/8 | 1/8 |
| G | FOLD-OVER BACK STRIP | 1 | 26 1/2 | 1/4 | 2 1/2 | 1/8 |
| H | OPENING REINFORCING STRIP | 2 | 3 | 1/4 | 7/8 | 1/8 |


FIGURE 4 - THROAT DETAILS






Source: https://assist.dla.mil -- Downloaded: 2026-01-17T14:36Z
Check the source to verify that this is the current version before use.

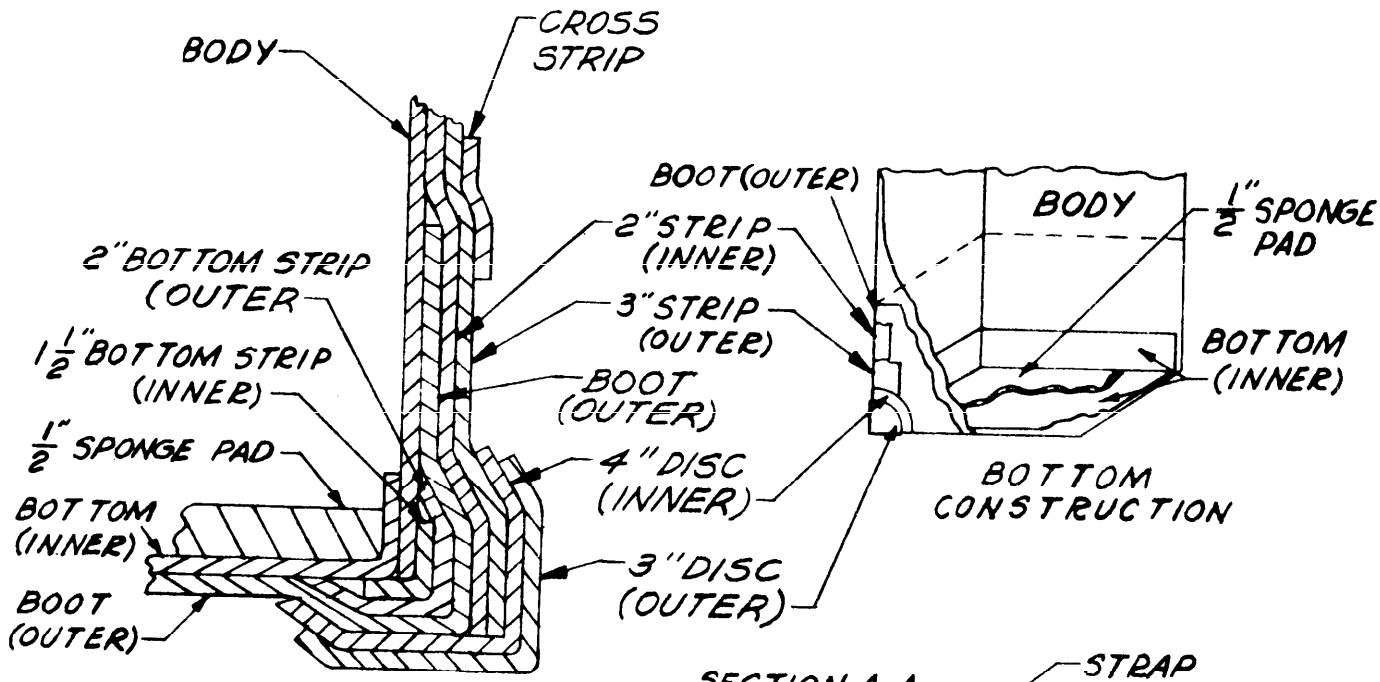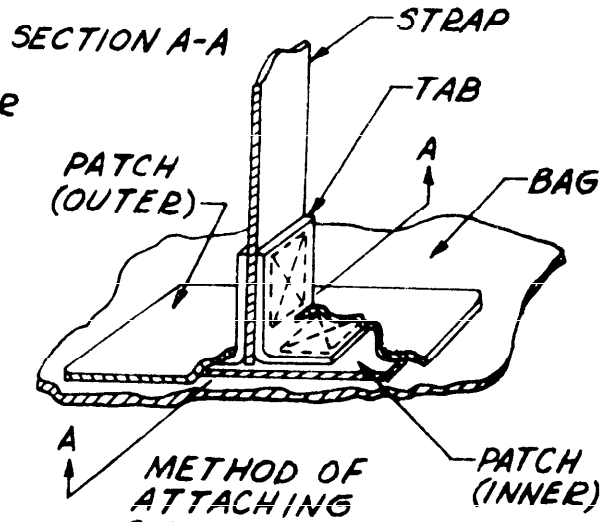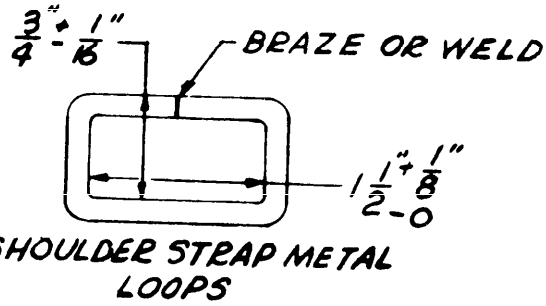

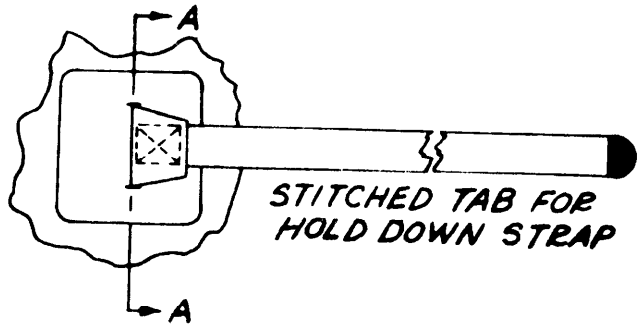




FIGURE 5 - DETAILS AND SECTIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Laboratories
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**OFFICIAL BUSINESS**
**PENALTY FOR PRIVATE USE $300**
DRDNA-ES

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Laboratories
ATTN: DRDNA-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-17T14:36Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-B-10930C | Bag, Signal Equipment, Waterproof |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 APR 83

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:36Z
Check the source to verify that this is the current version before use.