
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, MICA DIELECTRIC, BUTTON STYLE (FEED THRU) STYLES CB11, CB13, CB14

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-10950.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

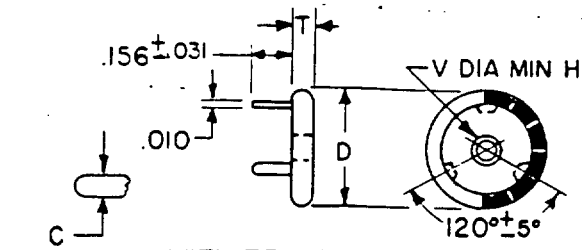


WITH TERMINAL ASSEMBLY N AND SHELL DIMENSIONS




WITH TERMINAL ASSEMBLY Q


INCHES	MM
.005	.13
.010	.25
.019	.48
.031	.79
.040	1.02
.047	1.19
.051	1.30
.074	1.88
.094	2.39
.156	3.96
.275	6.99
.391	9.93
.518	13.16

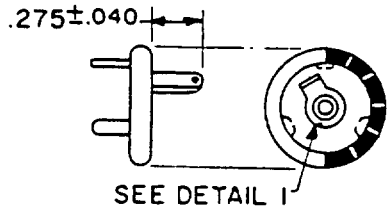


WITH TERMINAL ASSEMBLY P

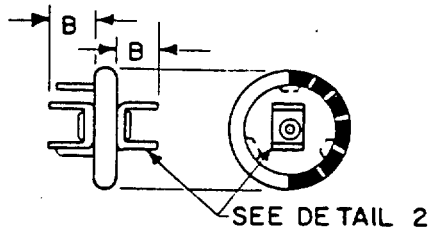


WITH TERMINAL ASSEMBLY S

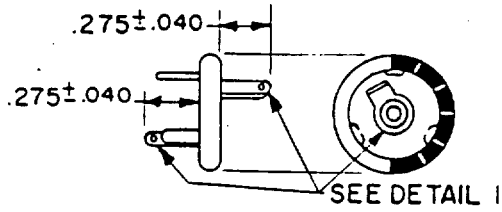


WITH TERMINAL ASSEMBLY R

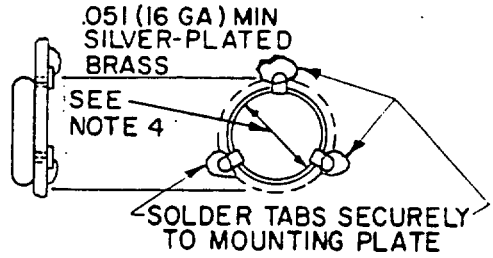

MOUNTING SKETCH

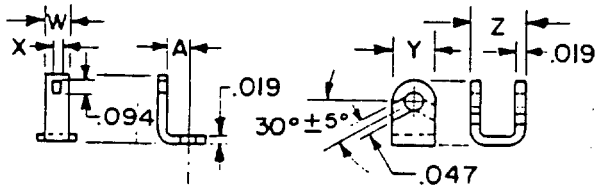

DETAIL 1 DETAIL 2

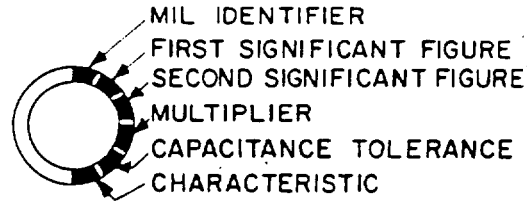

COLOR-CODE MARKING

NOTES:
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .xxx±.005 (.13 mm)
4. Mounting tabs shall be placed on the capacitor to facilitate mounting in the mounting-plate hole. Mounting-plate hole dia. shall be .391 for style CB11 and .518 for styles CB13 and CB14.
5. All dimensions are exclusive of sealing compound and color code.
6. Color-coded section shall not exceed 240°.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions (inches). 1/

Style	D±.015 (.38)	T	A±.031 (.79)	B±.040 (1.02)	C±.010 (.25)	V(min)	W±.005 (.13)	X(min)	Y±.010 (.25)	Z±.031 (.79)
CB11	.450 (11.43)	2/ .085±.031 (2.16) (.79)	.094 (2.39)	.234 (5.94)	.062 (1.57)	.040 (1.02)	.094 (2.39)	.035 (.89)	.156 (3.96)	.203 (5.16)
CB13	.650 (16.51)	.094±.025 (2.39) (.64)	.109 (2.77)	.328 (8.33)	.094 (2.39)	.050 (1.27)	.125 (3.18)	.040 (1.02)	.187 (4.75)	.266 (6.76)
CB14	.650 (16.51)	.168±.025 (4.27)(.64)	.109 (2.77)	.328 (8.33)	.094 (2.39)	.050 (1.27)	.125 (3.18)	.040 (1.02)	.187 (4.75)	.266 (6.76)

1/ Metrics are in parentheses.
2/ For any value above 1000 pf, this dimension shall not exceed 0.175.

TABLE II. Styles CB11, CB13, and CB14.

Part number 1/	Capacitance	DC rated voltage	Characteristic available at capacitance tolerances				Terminal assemblies
			±1% (F)	±2% (G)	±5% (J)	±10% (K)	
	pf	Volts					
CB11-B050K	5	500				B	N, P, Q, R, S
CB11-D100K	10	500				D	N, P, Q, R, S
CB11-D150K	15	500				D	N, P, Q, R, S
CB11-D180K	18	500				D	N, P, Q, R, S
CB11-D200-	20	500			D	D	N, P, Q, R, S
CB11-D220-	22	500			D	D	N, P, Q, R, S
CB11-D240-	24	500			D	D	N, P, Q, R, S
CB11-D270-	27	500			D	D	N, P, Q, R, S
CB11-D300-	30	500			D	D	N, P, Q, R, S
CB11-D330-	33	500			D	D	N, P, Q, R, S
CB11-D390-	39	500			D	D	N, P, Q, R, S
CB11-D470-	47	500			D	D	N, P, Q, R, S
CB11--510-	51	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--560-	56	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--620-	62	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--680-	68	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--750-	75	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--101-	100	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--111-	110	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--151-	150	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--161-	160	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--201-	200	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--221-	220	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--241-	240	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--271-	270	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--301-	300	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--331-	330	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--361-	360	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--431-	430	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--471-	470	500	D, E	D, E	D, E	D, E	N, P, Q, R, S

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

TABLE II. Styles CB11, CB13, and CB14 (continued).

Part number 1/	Capacitance	DC rated voltage	Characteristic available at capacitance tolerances				Terminal assemblies
			±1% (F)	±2% (G)	±5% (J)	±10% (K)	
	pf	Volts					
CB11--511-	510	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--561-	560	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--621-	620	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--681-	680	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--751-	750	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB11--102-	1, 000	500	D, E	D, E	D, E	D, E	N, P, Q, R, S,
CB11--152-	1, 500	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB13--182-	1, 800	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB13--222-	2, 200	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB13--242-	2, 400	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB13--272-	2, 700	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--302-	3, 000	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--332-	3, 300	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--362-	3, 600	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--392-	3, 900	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--432-	4, 300	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--472-	4, 700	500	D, E	D, E	D, E	D, E	N, P, Q, R, S
CB14--512-	5, 100	500	D, E	D, E	D, E	D, E	N, P, Q, R, S

1/ The complete part number shall include additional symbols for terminal assembly, characteristic, and capacitance tolerance.

REQUIREMENTS:

Dimensions and configuration:

Case: See figure and table I.

Terminals: See figure and table I.

Capacitance value: See table II.

Capacitance tolerance: See table II.

DC rated voltage: 500 volts.

Dissipation factor: See figure 1 of MIL-C-10950.

Characteristics: See table II.

Symbol	Temperature coefficient	Capacitance drift
B	Not specified	Not specified
D	-100 to +100	0.3 percent or 0.3 pf whichever is greater
E	-20 to +100	±(0.1 percent + 0.1 pf)

Operating temperature range: -55° to 85° C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202:
200 percent of rated dc voltage for not less than 1 second, nor more than 5 seconds.

Barometric pressure: Method 105 of MIL-STD-202, condition C (70, 000 ft).
Test potential - 125 percent of rated dc voltage for not less than 1 second nor more than 5 seconds. Surge current shall not exceed 5 ma.

Insulation resistance: Method 302 of MIL-STD-202, condition A or B.
At 25° C - 50, 000 megohms minimum.
At 85° C - 15, 000 megohms minimum.

Capacitance: Method 305 of MIL-STD-202.
Measurement frequency -
Capacitance values of 1000 pf or less - 1 MHz ± 100 kHz.
Capacitance values of greater than 1000 pf - 1 kHz ± 100 Hz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

Shock (medium impact): Method 205 of MIL-STD-202, condition C (50G).

Vibration: Method 204 of MIL-STD-202, condition B.

Moisture resistance: Method 106 of MIL-STD-202.
- Insulation resistance: Not less than 500 megohms.
- Capacitance change: Within 1 percent of the initial value or 0.5 pf, whichever is greater.
- DF - 200 percent of initial requirement.

Temperature cycling and immersion:
- Temperature cycling: Method 102 of MIL-STD-202, condition D.
- Immersion: Method 104 of MIL-STD-202, condition A.
- Insulation resistance: Not less than 500 megohms.
- Capacitance change: Within 1 percent of the initial value or 0.5 pf, whichever is greater.

Life:
2000 ± 12 hours at 85° $^{+3°}_{-0°}$ C.
- Insulation resistance: Greater than 50,000 megohms.
- Capacitance change: Within 3 percent of the initial value or 0.5 pf, whichever is greater.

Temperature coefficient and capacitance drift: Within the limits specified for the applicable characteristic.

Torque: In accordance with MIL-C-10950.
- Mounting - normal mounting means.
- Load - 2 ounce-inches for terminal N.
  4 ounce-inches for terminals P, Q, R, and S.

NOTES:
1. Conversion of dash numbers to part numbers is as shown in table III.
2. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

TABLE III. Dash number to part number conversion.

Dash number in MIL-C-10950/1D										Converted to part number 1/ in MIL-C-10950/1E
Characteristic D Terminal assembly					Characteristic E Terminal assembly					
N	P	Q	R	S	N	P	Q	R	S	
0001	0002	0003	0004	0005	0006	0007	0008	0009	0010	CB11--510F
0011	0012	0013	0014	0015	0016	0017	0018	0019	0020	CB11--560F
0021	0022	0023	0024	0025	0026	0027	0028	0029	0030	CB11--620F
0031	0032	0033	0034	0035	0036	0037	0038	0039	0040	CB11--680F
0041	0042	0043	0044	0045	0046	0047	0048	0049	0050	CB11--750F
0051	0052	0053	0054	0055	0056	0057	0058	0059	0060	CB11--101F
0061	0062	0063	0064	0065	0066	0067	0068	0069	0070	CB11--111F
0071	0072	0073	0074	0075	0076	0077	0078	0079	0080	CB11--151F
0081	0082	0083	0084	0085	0086	0087	0088	0089	0090	CB11--161F
0091	0092	0093	0094	0095	0096	0097	0098	0099	0100	CB11--221F
0101	0102	0103	0104	0105	0106	0107	0108	0109	0110	CB11--241F
0111	0112	0113	0114	0115	0116	0117	0118	0119	0120	CB11--271F
0121	0122	0123	0124	0125	0126	0127	0128	0129	0130	CB11--301F
0131	0132	0133	0134	0135	0136	0137	0138	0139	0140	CB11--331F
0141	0142	0143	0144	0145	0146	0147	0148	0149	0150	CB11--361F
0151	0152	0153	0154	0155	0156	0157	0158	0159	0160	CB11--431F
0161	0162	0163	0164	0165	0166	0167	0168	0169	0170	CB11--471F
0171	0172	0173	0174	0175	0176	0177	0178	0179	0180	CB11--511F
0181	0182	0183	0184	0185	0186	0187	0188	0189	0190	CB11--561F
0191	0192	0193	0194	0195	0196	0197	0198	0199	0200	CB11--621F
0201	0202	0203	0204	0205	0206	0207	0208	0209	0210	CB11--681F
0211	0212	0213	0214	0215	0216	0217	0218	0219	0220	CB11--751F
0221	0222	0223	0224	0225	0226	0227	0228	0229	0230	CB11--102F
0231	0232	0233	0234	0235	0236	0237	0238	0239	0240	CB11--152F
0241	0242	0243	0244	0245	0246	0247	0248	0249	0250	CB13--182F
0251	0252	0253	0254	0255	0256	0257	0258	0259	0260	CB13--222F
0261	0262	0263	0264	0265	0266	0267	0268	0269	0270	CB13--242F
0271	0272	0273	0274	0275	0276	0277	0278	0279	0280	CB13--272F
0281	0282	0283	0284	0285	0286	0287	0288	0289	0290	CB14--302F
0291	0292	0293	0294	0295	0296	0297	0298	0299	0300	CB14--332F
0301	0302	0303	0304	0305	0306	0307	0308	0309	0310	CB14--362F
0311	0312	0313	0314	0315	0316	0317	0318	0319	0320	CB14--392F
0321	0322	0323	0324	0325	0326	0327	0328	0329	0330	CB14--432F
0331	0332	0333	0334	0335	0336	0337	0338	0339	0340	CB14--472F
0341	0342	0343	0344	0345	0346	0347	0348	0349	0350	CB14--512F
0351	0352	0353	0354	0355	0356	0357	0358	0359	0360	CB11--510G
0361	0362	0363	0364	0365	0366	0367	0368	0369	0370	CB11--560G
0371	0372	0373	0374	0375	0376	0377	0378	0379	0380	CB11--620G
0381	0382	0383	0384	0385	0386	0387	0388	0389	0390	CB11--680G
0391	0392	0393	0394	0395	0396	0397	0398	0399	0400	CB11--750G

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

TABLE III. Dash number to part number conversion (continued).

Dash number in MIL-C-10950/1D										Converted to part number 1/ in MIL-C-10950/1E
Characteristic D Terminal assembly					Characteristic E Terminal assembly					
N	P	Q	R	S	N	P	Q	R	S	
0401	0402	0403	0404	0405	0406	0407	0408	0409	0410	CB11--101G
0411	0412	0413	0414	0415	0416	0417	0418	0419	0420	CB11--111G
0421	0422	0423	0424	0425	0426	0427	0428	0429	0430	CB11--151G
0431	0432	0433	0434	0435	0436	0437	0438	0439	0440	CB11--161G
0441	0442	0443	0444	0445	0446	0447	0448	0449	0450	CB11--221G
0451	0452	0453	0454	0455	0456	0457	0458	0459	0460	CB11--241G
0461	0462	0463	0464	0465	0466	0467	0468	0469	0470	CB11--271G
0471	0472	0473	0474	0475	0476	0477	0478	0479	0480	CB11--301G
0481	0482	0483	0484	0485	0486	0487	0488	0489	0490	CB11--331G
0491	0492	0493	0494	0495	0496	0497	0498	0499	0500	CB11--361G
0501	0502	0503	0504	0505	0506	0507	0508	0509	0510	CB11--431G
0511	0512	0513	0514	0515	0516	0517	0518	0519	0520	CB11--471G
0521	0522	0523	0524	0525	0526	0527	0528	0529	0530	CB11--511G
0531	0532	0533	0534	0535	0536	0537	0538	0539	0540	CB11--561G
0541	0542	0543	0544	0545	0546	0547	0548	0549	0550	CB11--621G
0551	0552	0553	0554	0555	0556	0557	0558	0559	0560	CB11--681G
0561	0562	0563	0564	0565	0566	0567	0568	0569	0570	CB11--751G
0571	0572	0573	0574	0575	0576	0577	0578	0579	0580	CB11--102G
0581	0582	0583	0584	0585	0586	0587	0588	0589	0590	CB11--152G
0591	0592	0593	0594	0595	0596	0597	0598	0599	0600	CB13--182G
0601	0602	0603	0604	0605	0606	0607	0608	0609	0610	CB13--222G
0611	0612	0613	0614	0615	0616	0617	0618	0619	0620	CB13--242G
0621	0622	0623	0624	0625	0626	0627	0628	0629	0630	CB13--272G
0631	0632	0633	0634	0635	0636	0637	0638	0639	0640	CB14--302G
0641	0642	0643	0644	0645	0646	0647	0648	0649	0650	CB14--332G
0651	0652	0653	0654	0655	0656	0657	0658	0659	0660	CB14--362G
0661	0662	0663	0664	0665	0666	0667	0668	0669	0670	CB14--392G
0671	0672	0673	0674	0675	0676	0677	0678	0679	0680	CB14--432G
0681	0682	0683	0684	0685	0686	0687	0688	0689	0690	CB14--472G
0691	0692	0693	0694	0695	0696	0697	0698	0699	0700	CB14--512G
0701	0702	0703	0704	0705						CB11-D200J
0706	0707	0708	0709	0710						CB11-D220J
0711	0712	0713	0714	0715						CB11-D240J
0716	0717	0718	0719	0720						CB11-D270J
0721	0722	0723	0724	0725						CB11-D300J
0726	0727	0728	0729	0730						CB11-D330J
0731	0732	0733	0734	0735						CB11-D390J
0736	0737	0738	0739	0740						CB11-D470J
0741	0742	0743	0744	0745	0746	0747	0748	0749	0750	CB11--510J
0751	0752	0753	0754	0755	0756	0757	0758	0759	0760	CB11--560J

1/ See footnote at end of table.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

TABLE III. Dash number to part number conversion (continued).

Dash number in MIL-C-10950/1D										Converted to part number 1/ in MIL-C-10950/1E
Characteristic D Terminal assembly					Characteristic E Terminal assembly					
N	P	Q	R	S	N	P	Q	R	S	
0761	0762	0763	0764	0765	0766	0767	0768	0769	0770	CB11--620J
0771	0772	0773	0774	0775	0776	0777	0778	0779	0780	CB11--680J
0781	0782	0783	0784	0785	0786	0787	0788	0789	0790	CB11--750J
0791	0792	0793	0794	0795	0796	0797	0798	0799	0800	CB11--101J
0801	0802	0803	0804	0805	0806	0807	0808	0809	0810	CB11--111J
0811	0812	0813	0814	0815	0816	0817	0818	0819	0820	CB11--151J
0821	0822	0823	0824	0825	0826	0827	0828	0829	0830	CB11--161J
0831	0832	0833	0834	0835	0836	0837	0838	0839	0840	CB11--201J
0841	0842	0843	0844	0845	0846	0847	0848	0849	0850	CB11--221J
0851	0852	0853	0854	0855	0856	0857	0858	0859	0860	CB11--241J
0861	0862	0863	0864	0865	0866	0867	0868	0869	0870	CB11--271J
0871	0872	0873	0874	0875	0876	0877	0878	0879	0880	CB11--301J
0881	0882	0883	0884	0885	0886	0887	0888	0889	0890	CB11--331J
0891	0892	0893	0894	0895	0896	0897	0898	0899	0900	CB11--361J
0901	0902	0903	0904	0905	0906	0907	0908	0909	0910	CB11--431J
0911	0912	0913	0914	0915	0916	0917	0918	0919	0920	CB11--471J
0921	0922	0923	0924	0925	0926	0927	0928	0929	0930	CB11--511J
0931	0932	0933	0934	0935	0936	0937	0938	0939	0940	CB11--561J
0941	0942	0943	0944	0945	0946	0947	0948	0949	0950	CB11--621J
0951	0952	0953	0954	0955	0956	0957	0958	0959	0960	CB11--681J
0961	0962	0963	0964	0965	0966	0967	0968	0969	0970	CB11--751J
0971	0972	0973	0974	0975	0976	0977	0978	0979	0980	CB11--102J
0981	0982	0983	0984	0985	0986	0987	0988	0989	0990	CB11--152J
0991	0992	0993	0994	0995	0996	0997	0998	0999	1000	CB13--182J
1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	CB13--222J
1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	CB13--242J
1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	CB13--272J
1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	CB14--302J
1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	CB14--332J
1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	CB14--362J
1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	CB14--392J
1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	CB14--432J
1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	CB14--472J
1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	CB14--512J
Characteristic B					Characteristic D					
1101	1102	1103	1104	1105						CB11-B050K
					1106	1107	1108	1109	1110	CB11-D100K
					1111	1112	1113	1114	1115	CB11-D150K
					1116	1117	1118	1119	1120	CB11-D180K
					1121	1122	1123	1124	1125	CB11-D200K

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

TABLE III. Dash number to part number conversion (continued).

Dash number in MIL-C-10950/1D										Converted to part number 1/ in MIL-C-10950/1E
Characteristic B Terminal assembly					Characteristic D Terminal assembly					
N	P	Q	R	S	N	P	Q	R	S	
					1126	1127	1128	1129	1130	CB11-D220K
					1131	1132	1133	1134	1135	CB11-D240K
					1136	1137	1138	1139	1140	CB11-D270K
					1141	1142	1143	1144	1145	CB11-D300K
					1146	1147	1148	1149	1150	CB11-D330K
					1151	1152	1153	1154	1155	CB11-D390K
					1156	1157	1158	1159	1160	CB11-D470K
					1161	1162	1163	1164	1165	CB11-D510K
					1166	1167	1168	1169	1170	CB11-D560K
					1171	1172	1173	1174	1175	CB11-D620K
					1176	1177	1178	1179	1180	CB11-D680K
					1181	1182	1183	1184	1185	CB11-D750K
					1186	1187	1188	1189	1190	CB11-D101K
					1191	1192	1193	1194	1195	CB11-D111K
					1196	1197	1198	1199	1200	CB11-D151K
					1201	1202	1203	1204	1205	CB11-D161K
					1206	1207	1208	1209	1210	CB11-D201K
					1211	1212	1213	1214	1215	CB11-D221K
					1216	1217	1218	1219	1220	CB11-D241K
					1221	1222	1223	1224	1225	CB11-D271K
					1226	1227	1228	1229	1230	CB11-D301K
					1231	1232	1233	1234	1235	CB11-D331K
					1236	1237	1238	1239	1240	CB11-D361K
					1241	1242	1243	1244	1245	CB11-D431K
					1246	1247	1248	1249	1250	CB11-D471K
					1251	1252	1253	1254	1255	CB11-D511K
					1256	1257	1258	1259	1260	CB11-D561K
					1261	1262	1263	1264	1265	CB11-D621K
					1266	1267	1268	1269	1270	CB11-D681K
					1271	1272	1273	1274	1275	CB11-D751K
					1276	1277	1278	1279	1280	CB11-D102K
					1281	1282	1283	1284	1285	CB11-D152K
					1286	1287	1288	1289	1290	CB13-D182K
					1291	1292	1293	1294	1295	CB13-D222K
					1296	1297	1298	1299	1300	CB13-D242K
					1301	1302	1303	1304	1305	CB13-D272K
					1306	1307	1308	1309	1310	CB14-D332K
					1311	1312	1313	1314	1315	CB14-D392K
					1316	1317	1318	1319	1320	CB14-D432K
					1321	1322	1323	1324	1325	CB14-D472K
					1326	1327	1328	1329	1330	CB14-D512K

1/ The complete part number shall include symbols for terminal assembly and characteristic, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - SH
Air Force - 11, 17, 85
DSA - ES

User activities:
Navy - AS, OS, CG

Preparing activity:
Navy - EC

(Project 5910-0847-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:38Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-510/A-450