MIL-F-10915L
8 September 1972
SUPERSEDING
MIL-F-10915K
13 March 1969

MILITARY SPECIFICATION

FUZE, HAND GRENADE, RIOT, POCKET, CS, M201A1E1; FUZE, FLOATING SMOKE POT, M207A1; AND FUZE, INCENDIARY, M210

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers three types of fuzes.

1.2 Classification. The fuzes are of the following types:

M201A1E1 Hand Grenade Fuze.
M207A1 Floating Smoke Pot Fuze.
M210 Incendiary Fuze.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-W-572	-	Wood Preservative; Water Repellent.
UU-P-63	-	Paper, Blotting.
PPP-B-585	-	Boxes, Wood, Wirebound.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

FSC 1330
1365
1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-B-2427 - Boxes, Ammunition Packing; Wood, Nailed.
MIL-P-15011 - Pallet, Material Handling, Hardwood, Post Construction 4-Way.
MIL-B-46506 - Box, Ammunition Packing, Wood, Wirebound.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" 4-Way (Partial) Pallet Skids, Runners, or Pallet-Type Base.
MIL-STD-1234 - Pyrotechnic, Sampling, Inspection and Testing.

DRAWINGS

US ARMY MUNITIONS COMMAND

EDGEWOOD ARSENAL

DL13-10-33 - Fuze, Hand Grenade, Riot, Pocket, CS, M201A1E1.
C36-7-35 - Fuze, Floating Smoke Pot, M207A1 - Bill of Material.
DL4-8-7 - Fuze, Incendiary, M210.
DLB136-21-400 - Tester, Ignition Fuze, Q149.
IDL13-10-33 - Fuze, Hand Grenade, Riot, Pocket, CS, M201A1E1.
IDL4-8-7 - Fuze, Incendiary, M210.

PUBLICATIONS

EDGEWOOD ARSENAL INSPECTION STANDARD

R7-2 - Radiographic Evaluation of Fuze M201A1, Igniting, Grenade.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies of these ratings, rules and regulations should be addressed to Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, IL 60606.)

AMERICAN TRUCKING ASSOCIATIONS, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street, N. W., Washington, DC 20036.)

AGENT T. C. GEORGE's TARIFF

(Applications for copies should be addressed to T. C. George, Agent, 2 Pennsylvania Plaza, New York, NY 10001)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawings DL13-10-33, C36-7-35 and DL4-8-7 or on the subsidiary drawings shall conform to the specifications listed thereon or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components of the fuzes shall conform to the specifications and drawings listed in 3.1.1 and subsidiary drawings.

3.1.2.1 Moisture. The moisture and volatile content of each batch of pyrotechnic mixture shall be 1.0 percent maximum as determined by one of the procedures indicated in paragraph 4.4.4.2 immediately prior to being loaded in the fuze body.

3.2 Filling and assembly. The fuze shall be filled and assembled in accordance with the applicable drawing (see 6.2, 6.3, and 6.4). When palletizing process is used, the fuze shall be examined in accordance with 4.4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

3.3 Functioning. When tested in accordance with 4.4.4.3 the fuze shall function as follows:

(a) Water immersion. Prior to testing, the fuze shall be submerged in water at a temperature of 10 ± 2° F above ambient, to a depth of 6 ± 1 inch, for a period of 4 ± 1/4 hours.

(b) Delay time. The delay time shall be between 0.7 and 2.0 seconds.

(c) Flash ejection. The fuze shall be tested within 1 hour after removal from the water. The fuze shall ignite and eject a flash to a distance of 6-1/8 ± 1/8 inch and produce the results shown in Figure 1.

(d) Seal separation. The fuze seal shall not separate from the body except for the bottom portion which is ruptured upon functioning.

3.4 Preproduction. Prior to the start of regular production, a preproduction lot of fuzes shall be produced in accordance with this specification for examination and tests.

3.5 Workmanship. The fuze shall be free from contamination (foreign matter) and damage such as dents, cracks and deformation which would impair its intended use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to specified requirements.

4.1.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1.1, 3.1.2 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

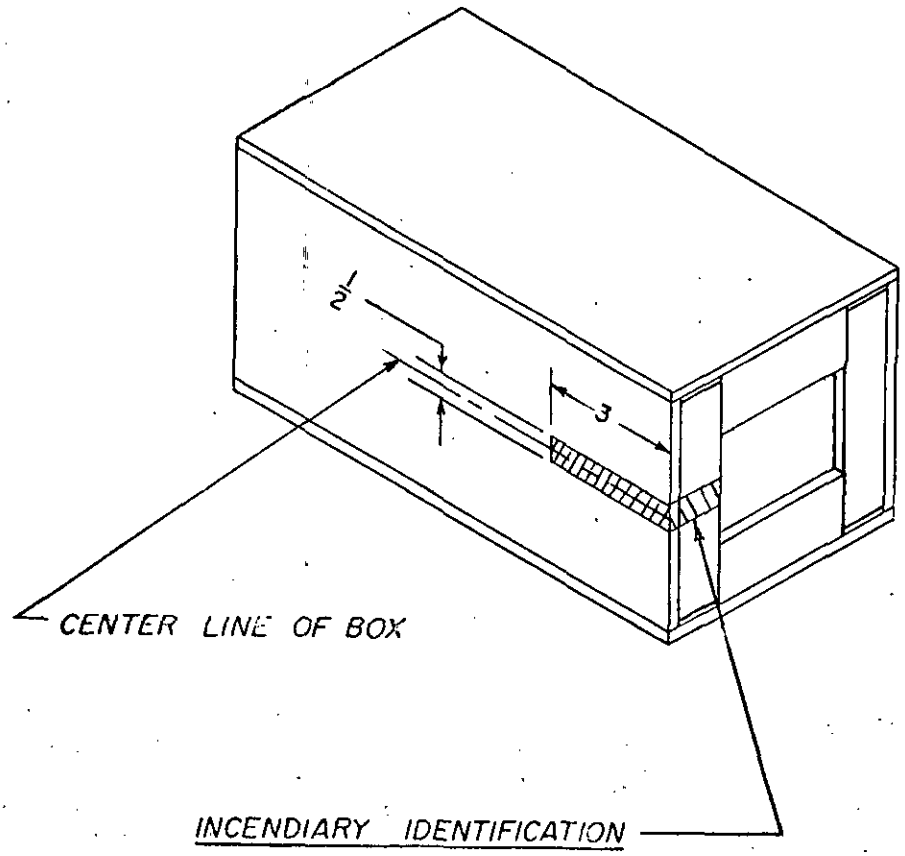


Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements are classified as follows:

(a) Preproduction inspection (see 4.3)
(b) Quality conformance inspection (see 4.4)

4.3 Preproduction inspection.

4.3.1 Lot. A preproduction lot of 1201 fuzes or production from one shift, Whichever is greater, shall be produced using the same methods, materials, equipment and processes as will be used in regular production.

4.3.2 Sampling.

4.3.2.1 For examination and nondestructive test. Sampling shall be conducted in accordance with MIL-STD-105, level III. If pelletizing process is used, the complete preproduction lot shall be examined in accordance with 4.4.4.1.

4.3.2.2 For in-process inspection of ignition mixture fill and cavity depth. A sample of five fuze bodies filled with loose, granulated, unconsolidated ignition mixture with seal assembled to fuze body shall be randomly taken during each hour or production.

4.3.2.3 For destructive tests. Sampling shall be conducted in accordance with MIL-STD-105, level III.

4.3.3 Inspection procedure.

4.3.3.1 For examination and nondestructive test. Sample fuzes shall be examined in accordance with the classification of defects and MIL-STD-105.

4.3.3.2 For in-process inspection of ignition mixture and cavity depth. If more than two fuzes in any one work shift exhibit a defect characteristic as defined in 4.4.4.4, all previous production of filled fuze bodies produced from the start of the work shift until time of encountering the third defective unit will be rejected and shall not be used in further assembly unless they are rescreened or reworked to meet contract requirements.

4.3.3.3 For destructive tests. Sample fuzes shall be tested in accordance with table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

Table I. Destructive test

Test	Requirement	Test method	Acceptance
Flash ejection distance	3.3	4.4.4.3	AQL 0.65 percent defective MIL-STD-105
Delay time	3.3	4.4.4.3	AQL 1.5 percent defective MIL-STD-105
Safety pin pull	Dwg C13-10-22	4.4.4.3	AQL 2.5 percent defective MIL-STD-105
Duds*		4.4.4.3	AQL 0.65 percent defective MIL-STD-105
Seal separation	3.3	4.4.4.3	AQL 0.65 percent defective MIL-STD-105

*A dud is a fuze which malfunctions due to mechanical or pyrotechnic failure.

4.3.3.4 Critical defect. Each fuze in the preproduction lot shall be inspected for its critical characteristic listed in the classification of defects.

4.3.4 Acceptance/rejection criteria. The preproduction lot shall meet the examinations and tests specified in this specification to be acceptable. The supplier shall obtain written approval from the contracting officer prior to proceeding with regular production.

4.4 Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

4.4.1 Lotting. A lot shall consist of the fuzes of one interfix number produced on one production line utilizing the same process. However, no more than one lot of primers or one lot of ignition train elements shall be represented in any one lot of assembled fuzes. A lot of ignition train elements is defined as a lot in which the chemical components of each element (i.e., first fire, delay train and ignition mixture) shall have been procured from one source. The minimum lot size shall be 8,000 fuzes.

4.4.2 Sampling.

4.4.2.1 For examination and nondestructive tests. Sampling shall be conducted in accordance with MIL-STD-105.

4.4.2.2 For in-process inspection of ignition mixture fill and cavity depth. A sample of five fuze bodies filled with loose, granulated, unconsolidated ignition mixture with seal assembled to fuze body shall be randomly taken during each hour of production.

4.4.2.3 For destructive tests. Sampling shall be conducted in accordance with MIL-STD-105.

4.4.3 Inspection procedure.

4.4.3.1 For examination and nondestructive tests. Sample fuzes and the levels A and B preparation for delivery shall be examined in accordance with the classification of defects and with MIL-STD-105.

4.4.3.2 For in-process inspection of ignition mixture and cavity depth. If more than two fuzes in any one work shift exhibit a defect characteristic as defined in 4.4.4.4, all previous production of filled fuze bodies produced from the start of the work shift until time of encountering the second defective unit will be rejected and shall not be used in further assembly unless they are rescreened or reworked to meet contract requirements.

4.4.3.3 For destructive tests. Sample fuzes shall be tested in accordance with table I.

4.4.3.4 Critical defects. Each fuze in the lot shall be inspected for its critical characteristic listed in the classification of defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

4.4.3.5 Classification of defects.

(a) Fuze, hand grenade, M201A1E1 assembly (Dwg C13-10-33); Fuze, floating smoke pot, M207A1 - assembly (Dwg C36-7-36); Fuze, incendiary, M210 - assembly (Dwg C4-8-7).

Categories	Defects	Acceptance standards
Critical:		
1	Safety pin incorrectly formed	
Major:	AQL 1.0 percent defective	
101	Seal incorrect	
102	Component missing or incorrectly assembled	
103	Marking incorrect	
104	Thread incorrect	
105	Workmanship (3.5)	
106	Aluminum foil ignition seal damaged or punctured	
107	Ignition seal sleeve loose	
108	Delay or first fire charge separated or loose	4.4.4.1
109	Ignition charge incorrect	

(b) Preparation for delivery (section 5).

Categories	Defects
Critical:	None defined
Major:	AQL 2.5 percent defective
101	Barrier bag not sealed properly
102	Unit Container closure incorrect
103	Marking identification band missing or incorrect
104	Marking missing, illegible or incorrect
105	Shipping container strapping missing or loose
106	Wood preservative missing from level A shipping containers and pallets
107	Pallets not strapped securely
108	Shipping containers loosely packed

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

4.4.4 Tests.

4.4.4.1 Filling (delay, first fire, and ignition charges). The fuze shall be radiographed in accordance with US Army Edgewood Arsenal Inspection Standard R7-2, when prepelletizing process is used.

4.4.4.2 Moisture. The determination of moisture and volatiles shall be conducted in accordance with method 101.1, 102.1 or 102.2 of MIL-STD-1234.

4.4.4.3 Functioning. Within one hour after being removed from water, the fuze shall be functioned using the Ignition Fuze Tester, Q149. Blotting paper conforming to grade A of UU-P-63 shall be used with the tester.

4.4.4.4 Ignition mixture and cavity depth. The seal shall be carefully removed to avoid disturbing the ignition mixture. After removal of the seal, the ignition mix shall be examined to determine if it is free flowing, granular, and free of lumps. It shall then be poured into a weighing pan and checked for a minimum weight of 180 milligrams. This weight shall be determined to the nearest milligram. The depth of the ignition cavity shall be measured to conform to the drawing requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Level of packaging shall be as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Fuze, M201A1E1. Seventy fuzes shall be packaged together in accordance with Drawing D13-9-66. Inside box dimensions in inches shall be 15-1/8 long by 7-3/8 wide by 5-3/4 deep.

5.1.1.2 Fuzes, M207A1 and M210. Seventy fuzes of the same type only shall be packaged together in accordance with Drawing D13-9-66. Inside box dimensions in inches shall be 15-1/8 long by 7-3/8 wide by 4 deep.

5.1.2 Level C.

5.1.2.1 Fuze, M201A1E1. Packaging shall be in accordance with 5.1.1.1 except that sealing in a barrier wrap to provide preservation in accordance with method IA-15 of MIL-P-116 is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

5.1.2.2 Fuzes, M207A1 and M210. Packaging shall be in accordance with 5.1.1.2 except sealing in a barrier wrap to provide preservation in accordance with method IA-15 of MIL-P-116 is not required.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Fuze, M201A1E1. Two boxes of fuzes, packaged as specified in 5.1.1.1, shall be packed together in either an overseas type, style J container of PPP-B-601; a Class 2, style 4 (for a type 2 load) of PPP-B-621; or a type I, Class 2 of MIL-B-46506. Inside dimensions of the shipping container in inches shall be 15-1/4 long by 15-1/8 wide by 6-1/2 deep. The shipping container and all wood parts thereof, shall be fully immersed for a minimum of 3 minutes in a water-repellant, wood preservative conforming to composition A of TT-W-572. Prior to packing the fuzes in the treated shipping container, the preservative shall be dry as evidenced by the preservative dryness test specified in MIL-B-2427 (for the PPP-B-601 and PPP-B-621 containers) or the requirements specified in the MIL-B-46506 as applicable.

5.2.1.2 Fuzes, M207A1 and M210. Two boxes of fuzes packaged as specified in 5.1.1.2 shall be packed together in accordance with 5.2.1.1, except the shipping container inside dimensions in inches shall be 15-1/4 long by 15-1/8 wide by 4-3/4 deep.

5.2.2 Level B.

5.2.2.1 Fuze, M201A1E1. Packing shall be in accordance with 5.2.1.1 except the exterior container may be domestic class or type.

5.2.2.2 Fuzes, M207A1 and M210. Packing shall be in accordance with 5.2.1.2 except the exterior container may be a domestic class or type.

5.2.3 Interplant shipment.

5.2.3.1 Fuzes, M201A1E1, M207A1 and M210. A designated quantity of fuzes, not to exceed the weight limitations specified as follows, shall be packaged and packed together in containers or special packs, as applicable, along with interior packaging, constructed as to give assurance that the items contained therein will remain in prime condition and adequate to assure safe delivery to destination without damage to contents. The containers shall comply with Uniform Freight Classification, National Motor Freight Classification, or T. C. George's Tariff,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

as applicable, and be acceptable for shipment at the most favorable rate. The containers shall be sufficiently rigid to withstand transportation and support storage in tiers at least 10 feet high, without damage to the container or its contents. The gross weight and size limitations of the container shall not exceed the tariff or classification limitations, specified therein, and the containers shall be closed or strapped as specified therein (see 6.5).

5.3 Marking. In addition to any special marking required by the contract or order, packages shall be marked in accordance with MIL-STD-129. Shipping containers shall be marked in accordance with Drawing D13-10-37.

5.4 Palletization. When specified in the contract or order, shipping containers shall be palletized in accordance with Drawings D13-10-53 and D4-8-8. Interplant shipping containers shall be palletized in accordance MIL-STD-147 using pallets in accordance with MIL-P-15011.

6. NOTES

6.1 Intended use. The M201A1E1 fuze ignites CS pocket grenades. The M207A1 fuze ignites floating type smoke pots and the M210 fuze ignites incendiary munitions.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Level of packaging and packing required.
(c) The shipment group size and marking (when required).
(d) Ignition fuze tester will be Government furnished.
(e) The type of fuze and applicable drawings required.
(f) Preproduction.

(1) Time allowed for supplier submission of sample for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the supplier whether to proceed with production.

6.3 Directive. US Army Edgewood Arsenal Directive No. 523 contains a suggested method of filling and assembling the M201A1E1 fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

6.4 Caution. Precaution should be taken to prevent fires or explosions incident to the preparation of the incendiary mixtures while assembling the fuzes. Red lead is a health hazard. Adequate ventilation should be provided in the area where the pyrotechnic mixtures are prepared and also in the area where the destructive tests are conducted.

6.5 Interplant shipment. Material which will not enter the military supply system. Typical are shipments of component parts from a vendor to a prime contractor, a sub-contractor or a supplier to a military arsenal or plant.

Custodians:

Army - MU
Navy - OS
AF - 70

Preparing activity:

Army - MU(EA)

Project No. 1365-1097


Review activities:

Navy - OS
Air Force - 70

User interest:

Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

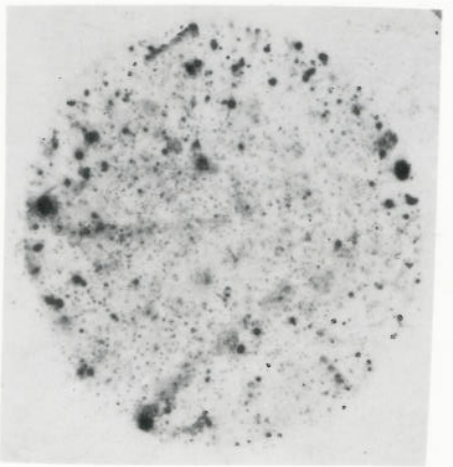

THE ABOVE PICTURE REPRESENTS A TEST CARD SHOWING A TYPICAL FLASH EJECTION PATTERN CAUSED BY EXPELLING AN IGNITION CHARGE FROM THE FUZE. ON THE ACTUAL CARD THE OVERALL GREY DISCOLORATION RESULTS FROM SMUDGING BY THE FLASH. EVIDENCE OF REDDISH SPOTS INDICATE UNBURNED MIX. NEITHER OF THESE SURFACE CONDITIONS ARE INDICATIVE OF IGNITION CHARACTERISTICS.

THE DARK SPOTS OR AREAS CAUSED BY BURNING PARTICLES OF IGNITION MIX SHALL SHOW EVIDENCE OF PENETRATION TO DISTINGUISH THEM FROM SMUDGE AND SURFACE MARKS.

EVIDENCE OF PENETRATION SHALL BE DETERMINED AS FOLLOWS:

A SOFT ERASER AND/OR THE POINT OF A SHARP INSTRUMENT SHALL BE LIGHTLY RUBBED OR SCRAPED ACROSS SUSPECT AREAS TO REMOVE SMUDGE OR SURFACE MARKINGS.

EVIDENCE OF PENETRATION IS THAT THE REMOVAL OF THE TOP SURFACE OF THE CARD REVEALS DARK SPOTS OR OBVIOUS INDENTATIONS IN THE CARD.

FIGURE I - IGNITION CHARACTERISTICS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the *use of the specification in procurement* of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

Defense Supply Agency

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.