
MILITARY SPECIFICATION SHEET

LOUDSPEAKER, PERMANENT MAGNET, (UNENCASED, 3-INCH DIAMETER CONE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the loudspeaker described herein shall consist of this specification and the latest issue of MIL-L-10911.

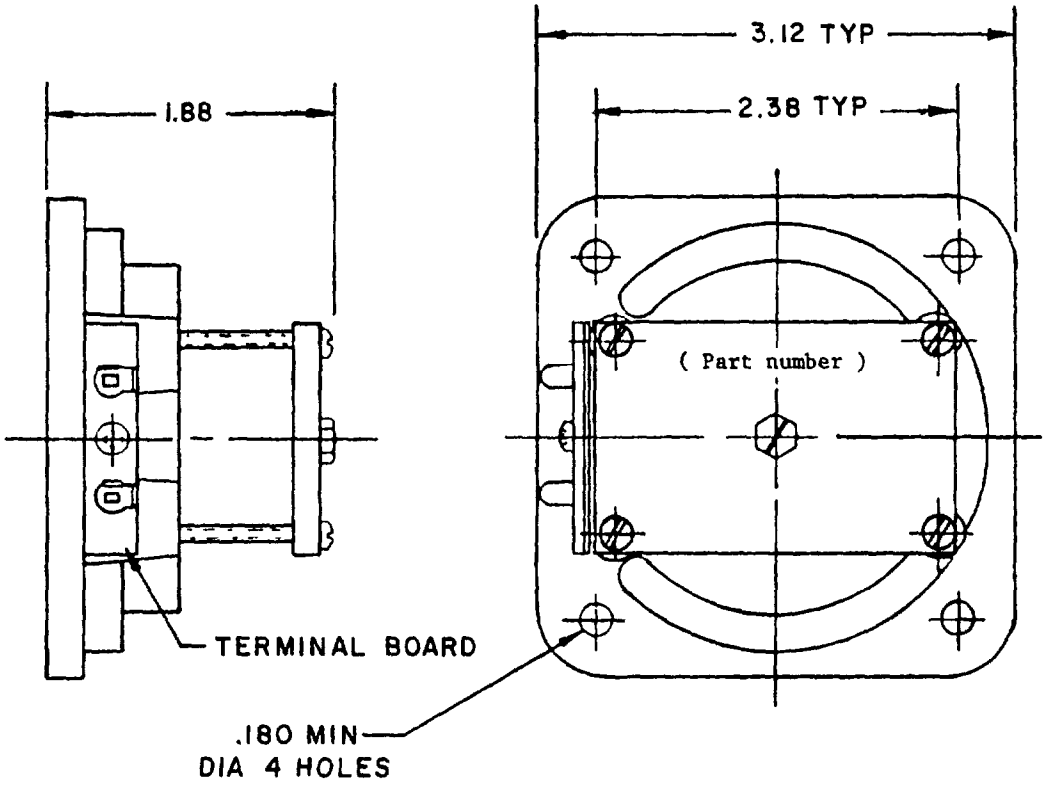

INCHES	MM
.180	4.57
1.88	47.75
2.38	60.45
3.12	79.25

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerances are ±.005(.13 mm) for three place decimals and ±.02(.51 mm) for two place decimals.
4. Radial mounting slots may be substituted for the circular holes provided that the centerlines of the slots coincide with the centerline of the holes and the slots include the circular holes specified.

FIGURE 1. Loudspeaker.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

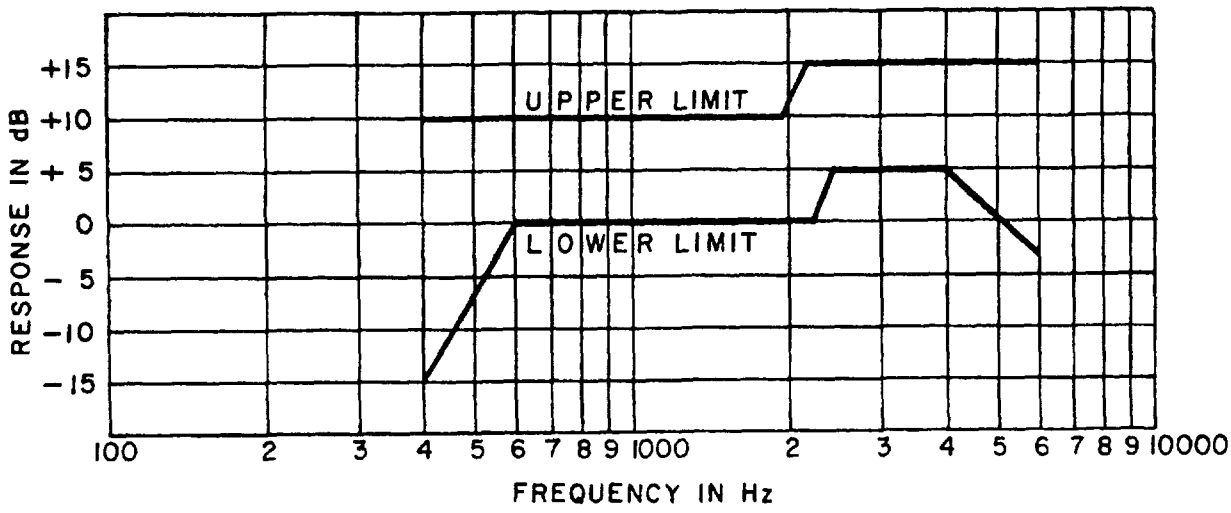


FIGURE 2. Frequency response limits.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Testing enclosure for measuring frequency response, harmonic distortion, vibration, and shock: 5 x 5 x 3-inch test cabinet with 2 3/4-inch diameter loudspeaker opening.

Terminal finish: Hot-dip solder (finish M221 of MIL-F-14072).

Power capacity: 2 watts, rms.

Peak power capacity: 4 watts, rms.

Dielectric withstanding test voltage: 400 ±5 volts.

Voice coil impedance:

Dash number 01: 4-8 ohms.

Dash number 02: 45 ohms.

Frequency response range: 400 to 6000 Hz (frequency response shall be within the limits shown on figure 2).

Frequency response: 97 dB minimum within 750 to 1250 Hz.

Harmonic distortion:

Dash number 01: 1 percent maximum.

Dash number 02: 5 percent maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

Cold resistance: The chamber shall be maintained at -80 +0, -5°F for 24 hours and then stabilized at -65 +0, -5°F.

Solderability (dash number 01): Applicable.

Vibration, high frequency (dash number 01): Method 204 of MIL-STD-202, test condition D.

Shock (specified pulse) (dash number 01): Applicable.

Marking:

Military part number: M10911/6-01 or M10911/6-02 as specified.

Date code: Applicable.

Revision letters are not used to denote changes due to the extensiveness of the changes.

NOTE: Impedance variations may be accomplished by either the use of voice coils wound to meet the specified impedance, or the installation of impedance matching transformers providing other performance characteristics are not adversely affected.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ER
Navy - OS, SH
Air Force - 13, 11
DLA - ES

User activities:
Army - AT, AV, ME, MI, AR
Navy - AS, MC
Air Force - 17

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-0176-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-L-109911/6A LOUDSPEAKERS, PERMANENT MAGNET, (UNENCASED, 3-INCH DIAMETER CONE)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

HQ, CECOM
ATTN: DRSEL-ED-TO
FT. MONMOUTH, N.J. 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:35Z
Check the source to verify that this is the current version before use.