FED SUP CLASS
5930

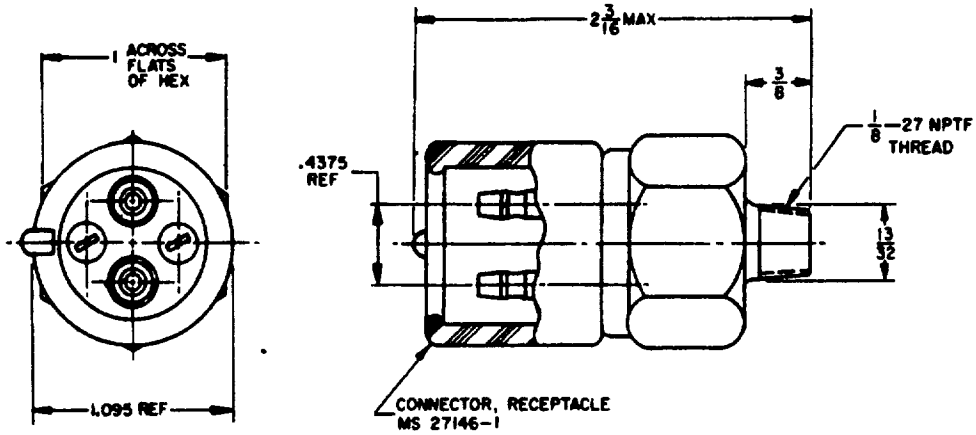

NOTES:

(B) 1. TYPE II (SUFFICIENTLY HIGH PRESSURE CLOSES CONTACTS) GRADE A (WATERPROOF) CLASS 2 (LOW VIBRATION) OF PROCUREMENT SPECIFICATION.

2. SWITCH CONTACTS SHALL CLOSE FROM 40 TO 110 PSI (ACTUATING PRESSURE) AND REMAIN CLOSED UPON INCREASING PRESSURE.

(B) 3. SWITCH CONTACT RATING AT 24 VOLTS DC: RESISTIVE LOAD 3 AMPS.

4. SWITCH SHALL MEET OVERLOAD PRESSURE REQUIREMENTS OF PROCUREMENT SPECIFICATION EXCEPT APPLIED PRESSURE SHALL BE 1800 PSI FOR 30 SECONDS. SWITCH SHALL NOT DISINTEGRATE UNDER 2500 PSI.

5. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES, TOLERANCES ARE ± 1/32 ON FRACTIONS.

6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.

APPROVED 27 FEB 1964 REVISED (A) 26 SEPTEMBER 1967 (B) 26 JUNE 1970

MS PART NO.	FORMER PART NO.
MS 75063 -1	ORD 7064588

P.A. AT
Other Cust

TITLE
SWITCH, PRESSURE-STOPLIGHT, VEHICULAR, HYDRAULIC BRAKE SYSTEM, 24 VOLT, WATERPROOF

MILITARY STANDARD
MS75063 (AT)

PROCUREMENT SPECIFICATION
MIL-S-12211

SUPERSEDES

SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.