
MILITARY SPECIFICATION SHEET

LOUDSPEAKER, SHIPBOARD ANNOUNCING SYSTEMS ENCASED, 70.7 VOLT, 1 TO 5 VOLT-AMPERES

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the loudspeaker described herein shall consist of this specification and the latest issue of MIL-L-24223.

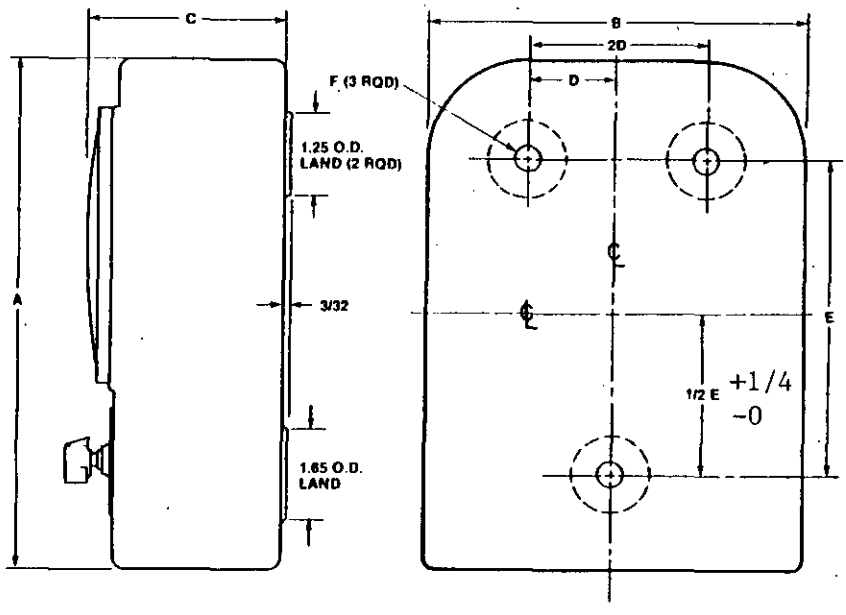

SH 11044

	Maximum weight (pounds)	Maximum dimensions (inches)						External volume control
		A	B	C	D	E	F	
LS 305( )/SIC *LS 306( )/SIC LS 530( )/SIC *LS 531( )/SIC	10	11	8-1/4	4-5/8	1-7/8	6-5/8	17/32 id	LS 306 LS 531

*Figure 3B - external volume control

FIGURE 1. Loudspeaker.

AMSC N/A

FSC 5965

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

PHYSICAL

Dimensions and weight: See figure 1.

Front face assembly: The front face assembly shall mount the loudspeaker element, transformer, volume control switch (if applicable). The front face assembly shall be chain bolted to the mounted enclosure.

Drainage hole or slot: A 1/4 by 3/8-inch drainage hole shall be provided through the bottom, (when bulkhead mounted), front edge of the mounted portion of the enclosure.

Protective screen: The protective metal screen attached to the front face speaker opening must not reduce the open area by more than 30 percent. Screen maximum opening dimension shall be 1/4-inch.

Enclosure: In accordance with figure 1, and drip proof 15 degrees in accordance with MIL-STD-108, when bulkhead mounted and when ceiling mounted. Speaker element mounting shall be in accordance with EIA RS 278. Application is shipboard, sheltered.

Cable entrance: Via stuffing tubes size 2 of MIL-S-19622/1. Two holes in the bottom surface are required. One hole shall be provided with a plastic plug.

PERFORMANCE

Testing: See MIL-L-24223.

Peak volt-ampere capacity: At least 2.50 times maximum volt-ampere of table I. Testing in accordance with MIL-L-24223.

Voice coil impedance: 8 ohms nominal in accordance with MIL-L-24223.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.

Sound pressure output: Decibel (dB) re 20 micropascals at 5 feet on axis shall be as specified in table I; with not more than the volt-amperes input specified in table I, when measured in accordance with 4.5.4.4.

TABLE I. Minimum on axis sound pressure (rms dBp).

Nomenclature	Warble bands-Hz						Maximum continuous volt-amperes input	320 to 2000 Hz coverage angle (degrees)
	320 to 500	500 to 800	800 to 1250	1250 to 2000	2000 to 3200	3200 to 5000		
LS 305/SIC, LS 306/SIC *LS 530/SIC, *LS 531/SIC	88	88	90	90	90	88	1.25	180

*Low stray magnetic field.

Loudspeaker coverage angle: 180 degrees in the vertical and horizontal planes, measured as specified in MIL-L-24223.

Sound power output level: Re 10^{-12} watts with 1 watt input shall be at least 99 dB (or 8.9 milliwatts) in the 250 to 500 Hz band.

Frequency response: Shall fall within the figure 2 limits over the band shown for any volume setting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.


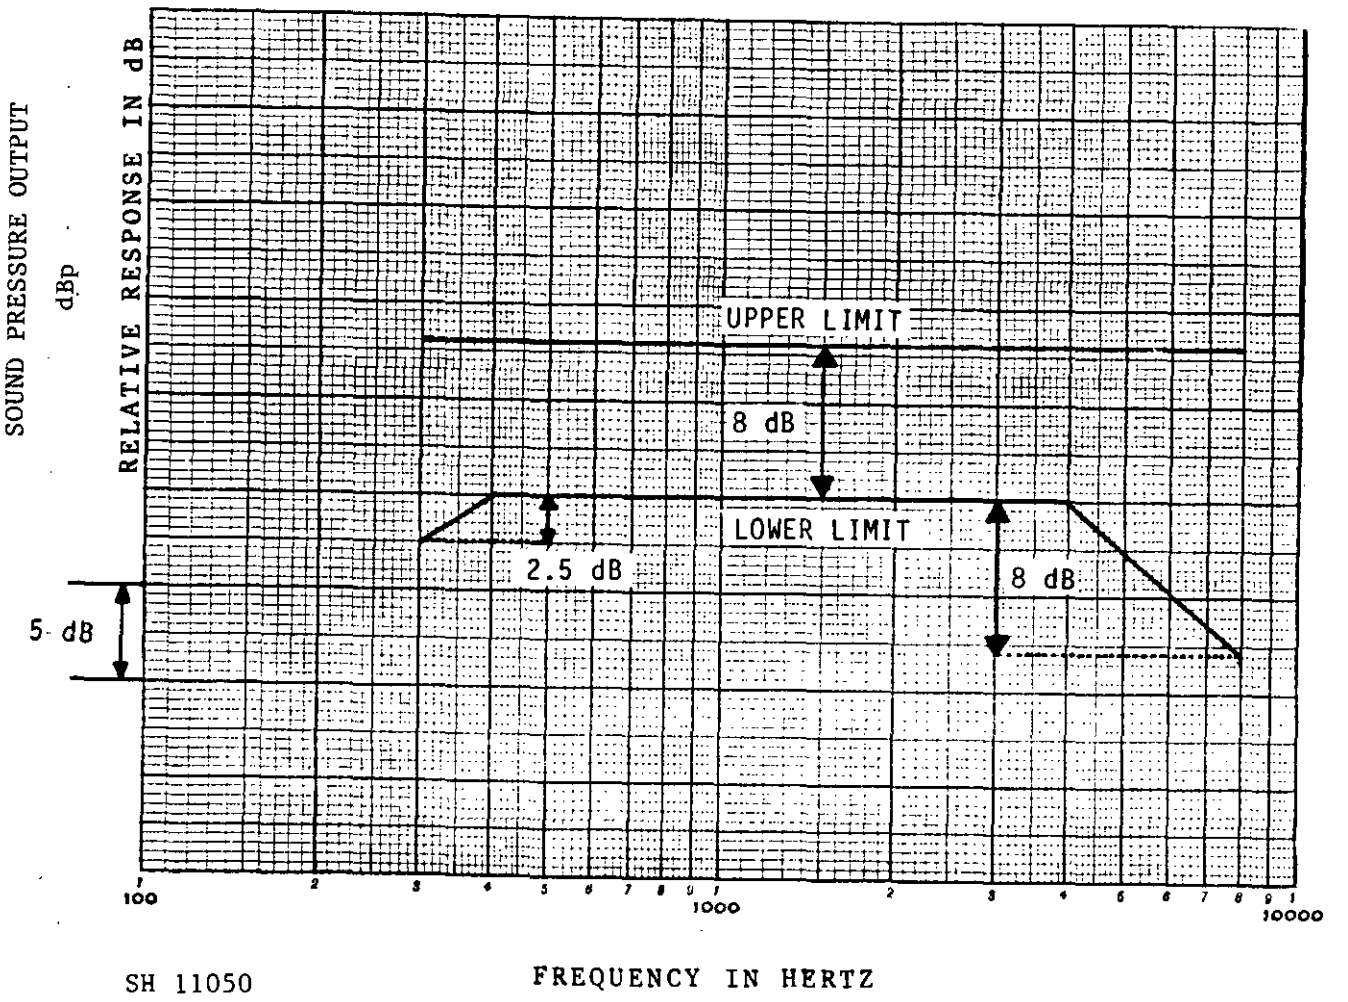



FIGURE 2. Frequency response limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.

Volume selection: Loudspeakers shall be provided volume control in accordance with figure 3.

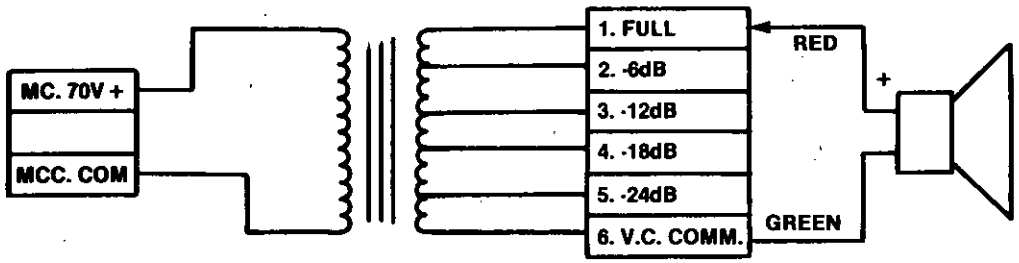

A. Internal volume control using a quick connector

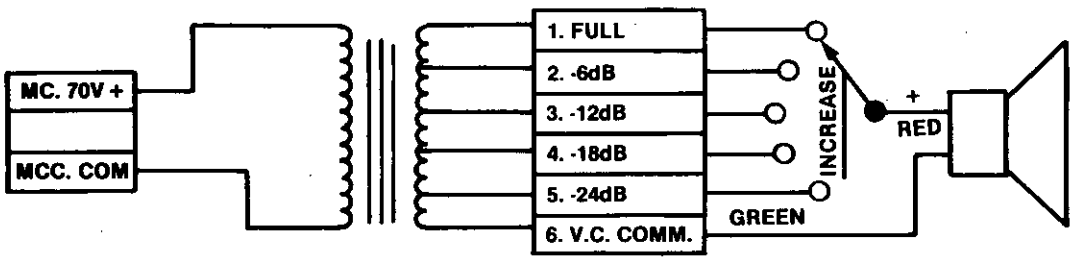

B. External volume control using a rotary selector switch.

SH 11048

FIGURE 3. Wiring diagram and terminal designation.

Marking: The positive voice coil terminal shall be marked "+" by die stamping or in a manner that is not obliterated by paint removal, chipping or mild oxidation. Terminal boards shall be marked as shown on figure 3.

Diagram: See figure 3 for applicable schematic wiring diagram for each enclosure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.

ENVIRONMENTAL

Requirements and inspections: As specified in MIL-L-24223 and the following:

Temperature: MIL-E-16400, range 4.

Stray magnetic field: Low stray magnetic field loudspeakers such as LS 530/SEC and LS 531/SIC shall not exceed 105 gamma (0.105 millioersted). All material except the permanent magnet shall be non-magnetic having a permeability of 2.0, or less after fabrication.

Icing: Not required.

Gunblast: Not required.

TESTING: See MIL-L-24223

Groups A and B inspection: No additional test requirements.

Group C inspection: Group C inspection shall occur at the 1506th loudspeaker, as determined by the sum of all deliverable loudspeakers of any type covered by this specification sheet. No additional testing is required.

Preparing activity:
Navy - SH
(Project 5965-N192-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.