
MILITARY SPECIFICATION SHEET

LOUDSPEAKER, SHIPBOARD ANNOUNCING SYSTEMS ENCASED, 70.7 VOLT, 6 TO 15 VOLT-AMPERES

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the loudspeaker described herein shall consist of this specification and the latest issue of MIL-L-24223.

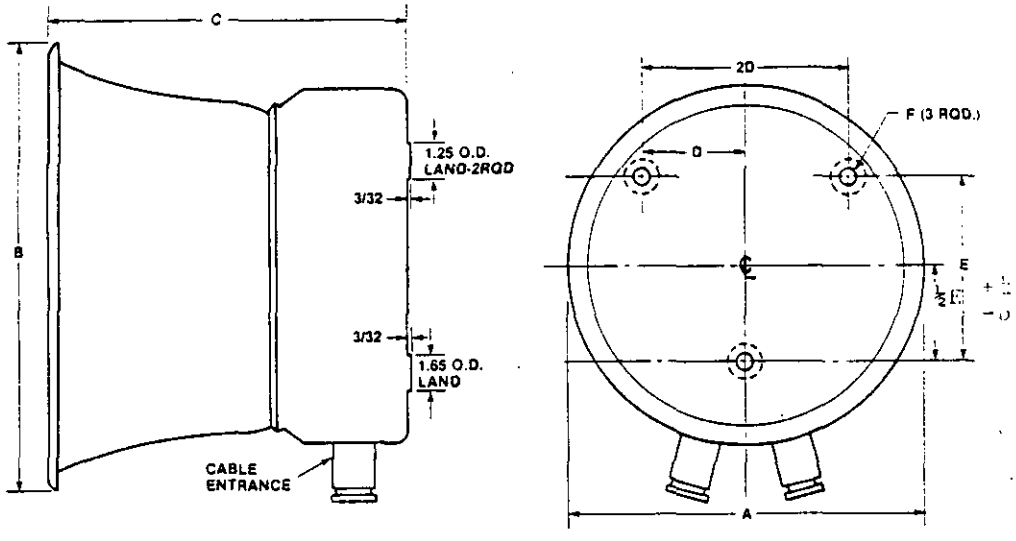

SH 131803

Nomenclature	Maximum weight (pounds)	Maximum dimensions (inches)					
		A	B	C	D	E	F
LS 387( )/SIC *LS 388( )/SIC	22	12-5/8	12-5/8	10	2-15/16	5-1/8	7/16
LS 535( )/SIC *LS 536( )/SIC	19	8-1/4	10-1/4	6	1-7/8	6-5/8	7/16

*Figure 3B volume control.

FIGURE 1. Loudspeaker.

AMSC N/A FSC 5965

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

PHYSICAL

Dimensions and weight: See figure 1.

Reflecting horn: A double reflecting horn is required.

Drainage: External and internal water drainage shall be provided for mounting angles from straight down to 45 degrees above horizontal.

Enclosure: In accordance with figure 1. Spraytight in accordance with MIL-STD-108.

Reflector assembly: Shall be removable by three bolts for access to the speaker driver, transformer, terminal boards and switch which shall all be secured to the mounted portion of the enclosure.

Cable entrance: Via stuffing tubes size 2 of MIL-S-19622/1. Two holes in the side surface (as mounted) are required. One hole shall be plugged.

PERFORMANCE

Testing: See MIL-L-24223.

Volt-ampere input: Volt-ampere input specified in table I shall provide at least sound pressure output, indicated in table I.

Peak volt-ampere capacity: At least 2.5 times table I maximum ampere input when tested in accordance with MIL-L-24223.

Voice coil impedance: 8 ohms nominal (see MIL-L-24223).

Sound pressure output: Sound pressure output in dB re 20 micropascals shall be as specified in table I, with not more than the volt-ampere input specified in table I, when measured as specified with 4.5.4.4.

Source: https://assist.dla.mil -- Downloaded: 202640-19T20:07Z
Check the source to verify that this is the current version before use.

TABLE I. Minimum on axis sound pressure (rms dBp).


	Distance to test MIC (feet)	Volt ampere input (max)	Warble bands-Hz					320 to 2000 Hz coverage angle (degrees)
			500 to 800	800 to 1250	1250 to 2000	2000 to 3200	3200 to 5000	
LS 387( )/SIC LS 388( )/SIC	10	7.5	104	108	109	106	-	50
*LS 535( )/SIC *LS 536( )/SIC	5	7.5	99	103	106	108	-	90

*Low stray magnetic field.

Coverage angle: As designated in table I.

Sound power: Output level re 10^{-12} watts with 1 watt input shall be 106 dB (20 milliwatts) in the 500 to 3200 Hz band.


Frequency response: Shall be within figure 2 limits over the band shown, for any volume setting.

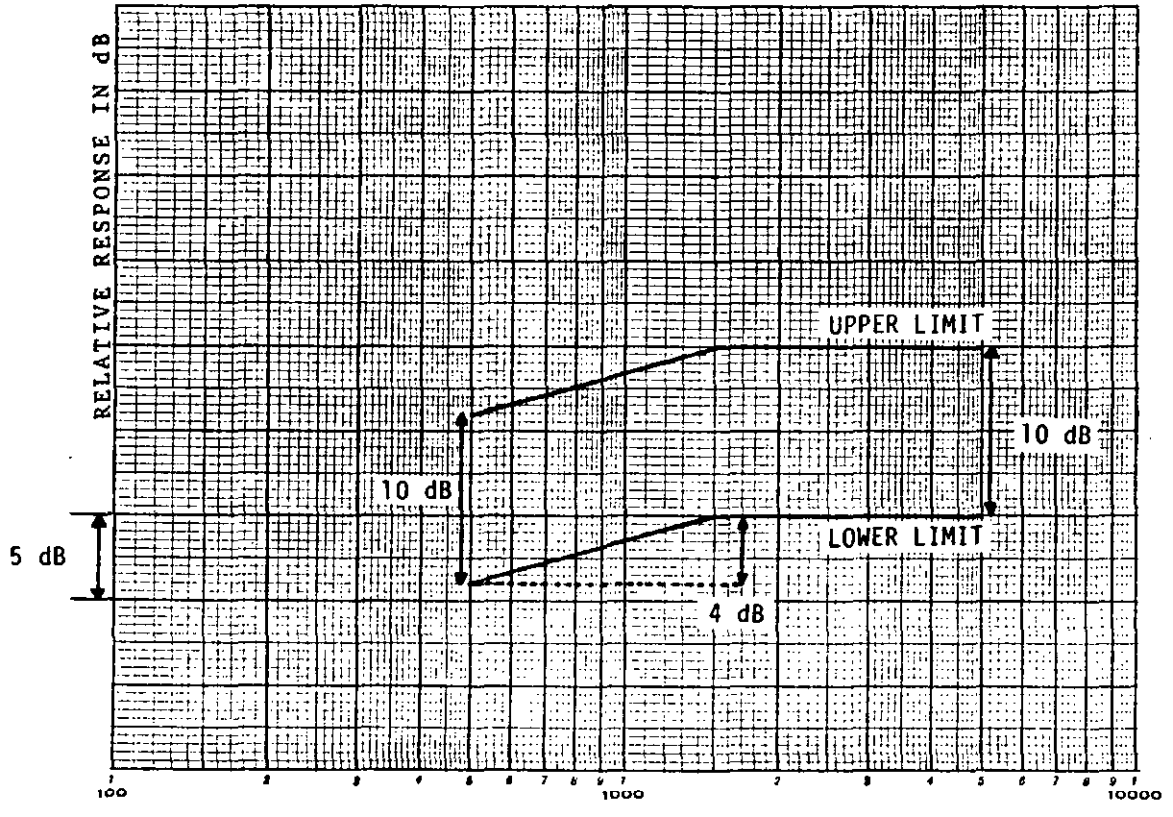


SH 11051

FIGURE 2. Frequency response limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.

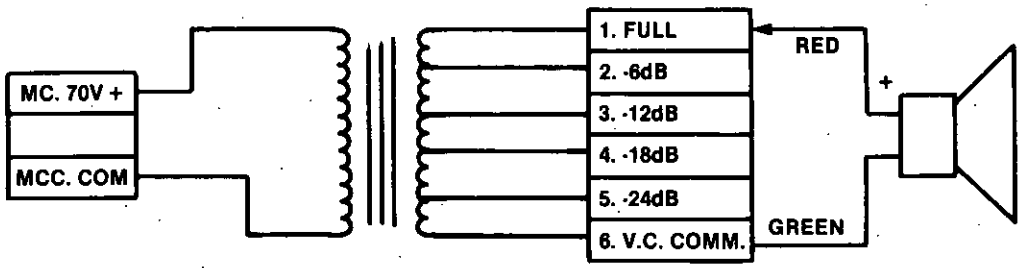

A. Internal control by transformer tap selection with a quick connector.

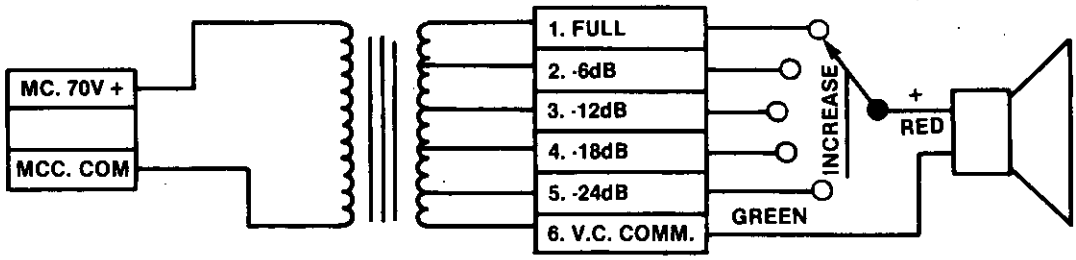

B. External volume control using a rotary selector switch.

SH 131804

FIGURE 3. Wiring diagram and terminal designation.

Marking: Marking shall be in accordance with MIL-L-24223/1 and figure 3 herein.

ENVIRONMENTAL

Requirements and inspections: As specified in MIL-L-24322 and as follows:

Temperature: MIL-E-16400, range 2 (exposed-unsheltered ship).

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:07Z
Check the source to verify that this is the current version before use.

Stray magnetic field: Low stray magnetic field loudspeakers such as LS 535( )/SIC and LS 536( )/SIC shall not exceed 210 gamma (2.10 milloersted). All material except the permanent magnet shall be nonmagnetic, having a permeability of 2.0, or less after fabrication.

TESTING: See MIL-L-24223.

Groups A and B inspection: No additional test requirements.

Group C inspection: Group C inspection shall occur at the 1006th loudspeaker, as determined by the sum of all deliverable first article loudspeakers of any type covered by this specification sheet.

Preparing activity:
Navy - SH
(Project 5965-N192-02)

PRINTING ... 792

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.