
MILITARY SPECIFICATION SHEET

LOUDSPEAKER, SHIPBOARD ANNOUNCING SYSTEMS ENCASED, HIGH POWER, ROTATIONAL, 70.7 VOLT

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the loudspeaker described herein shall consist of this specification and the latest issue of MIL-L-24223.

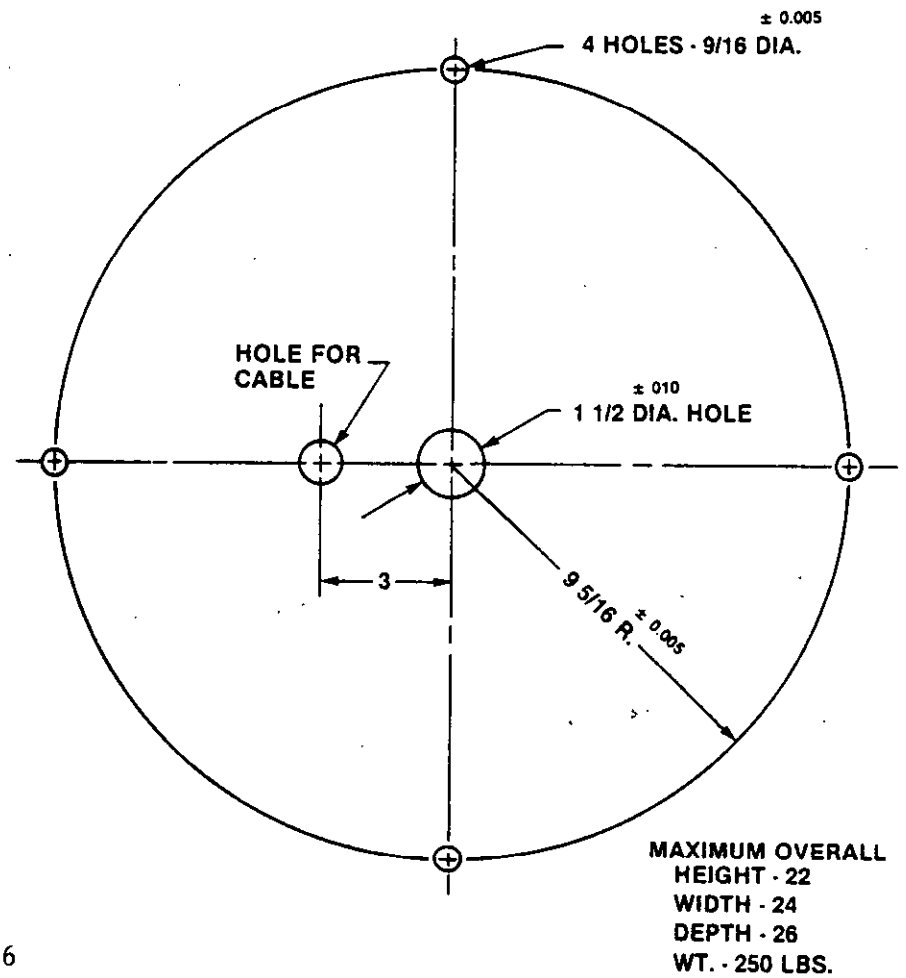

SH 11046

FIGURE 1. Mounting dimensions for LS 397( )/SIC.

AMSC N/A FSC 5965

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

PHYSICAL

Dimensions and weight: See figure 1.

Cable: Entrance as shown on figure 1. Shall accommodate one cable conforming to type DSGV-4 of MIL-C-915/29 entering through the bottom side of the mounting base without stuffing tubes.

Enclosure: Speaker enclosure shall be spraytight in accordance with MIL-STD-108. Wire connections shall be closed lugs on a threaded terminal with locknut and slip over rubber sleeves to protect the electrical connections from water, ice, and deposits. For unsheltered shipboard application.

Transformer and terminal block: In a watertight enclosure in accordance with MIL-STD-108.

Rotational base: Designed for use in foul weather conditions where severe icing occurs. The azimuth position shall be held in place by hand operated knobs or levers to hold the loudspeaker assembly from turning in winds exceeding 90 miles per hour. At least 330 degrees of rotation is required.

Speaker drivers: Shall not exceed 10 assemblies. Speaker drivers specified herein shall be in accordance with MIL-L-24223/3.

PERFORMANCE

Testing: As specified in MIL-L-24223.

Peak volt-ampere: Capacity shall be at least three times that specified in table I frequency when tested in accordance with MIL-L-24223.

Voice coil impedance: Shall be 4 $\pm$ 0.4 ohm nominal in accordance with EIA RS 276.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:07Z
Check the source to verify that this is the currentversion before use.

Sound pressure output: Minimum sound pressure output in dB re 20 micropascals at the indicated volt-ampere input shall be as specified in table I, when measured in accordance with 4.5.4.4.


TABLE I. Minimum on axis sound pressure (rms dBp).

Nomenclature	Distance to test MIC (feet)	Volt ampere input (max)	Warble bands-Hz					
			320 to 500	500 to 800	800 to 1250	1250 to 2000	2000 to 3200	3200 to 5000
LS 397( )/SIC	30	250	-	108	113	114	114	-

Coverage angle: Shall be at least 25 degrees horizontal, 45 degrees vertical, from 320 to 2000 Hz.

Sound power output: Level re 10^{-12} watts with 1 watt input shall be 105 dB in the 500 to 3200 Hz band.

Frequency: Frequency response shall be within figure 2 limits over the band shown.

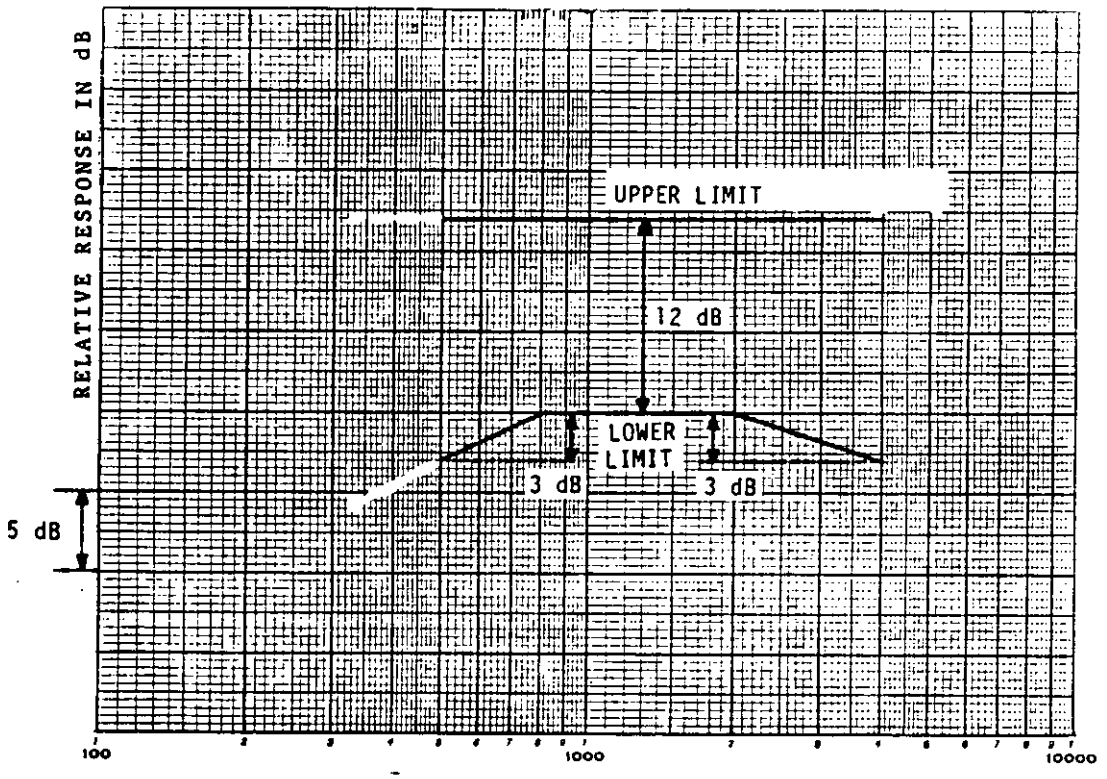

SH 11053

NOTE 1: The frequency limit between 320 and 500 Hz (as shown by dashed line) applies only to the type LS-657( )/SIC loudspeaker.


FIGURE 2. Frequency response limits for.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:07Z
Check the source to verify that this is the current version before use.

Volume selection: None required.

Fundamental resonance: At least one corner element and at least one middle element with both mounted in the complete assembly (less rotational base if desired) shall be measured and reported.

Marking: In accordance with MIL-L-24223/1 and figure 3.

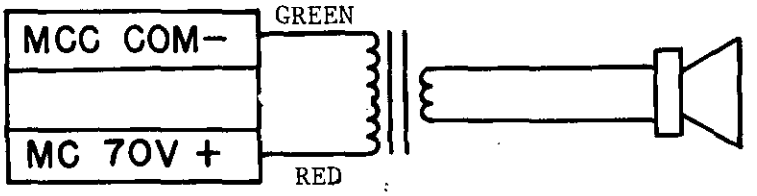

SH 11048

FIGURE 3. Wiring diagram and terminal designations.

ENVIRONMENTAL

Requirements and inspection: As specified in MIL-L-24223 and as follows:

Temperature: Required ranges in accordance with MIL-E-16400 for exposed unsheltered ship application (range 2).

Icing: Required; including rotational base.

Gun blast: Gun blast test, post gun blast test, and report as specified in MIL-L-24223/2. The test shall be conducted on at least two driver and reflector assemblies.

Shock: Conducted with the rotational base locked so that the speaker axis is along one of the octagonal directions of shock.

Vibration: Conducted with the base locked so that the speaker axis is along one of the octagonal direction of vibration.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:07Z
Check the source to verify that this is the currenversion before use.

TESTING

Samples: Minimum one complete assembly for first article and group C inspection.

Group C: Group C inspection shall occur on the 101st deliverable speaker. Group C tested assemblies may be refurbished for delivery provided all the speaker drivers are replaced.

Preparing activity:
Navy - SH
(Project 5965-N192-04)

- GOVERNMENT PRINTING OFFICE: 1990 - 704-0 /45022

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:07Z
Check the source to verify that this is the current version before use.