MIL-C-24231/1D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/1C(SHIPS)
30 August 1976
(See note 4)

MILITARY SPECIFICATION SHEET


CONNECTOR, PLUG, TYPE I, MOLDED, THREE-, FOUR-, AND FIVE-CONDUCTOR


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molded plug described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

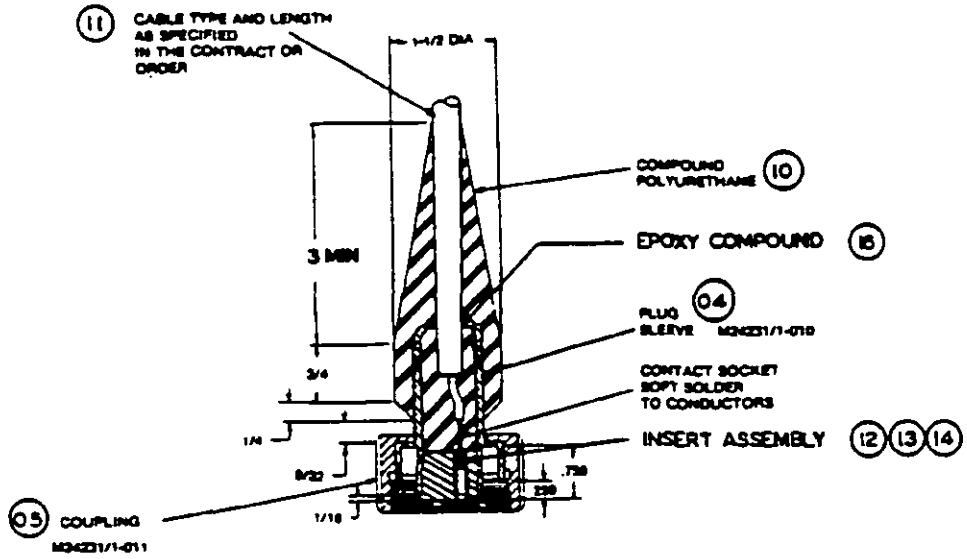

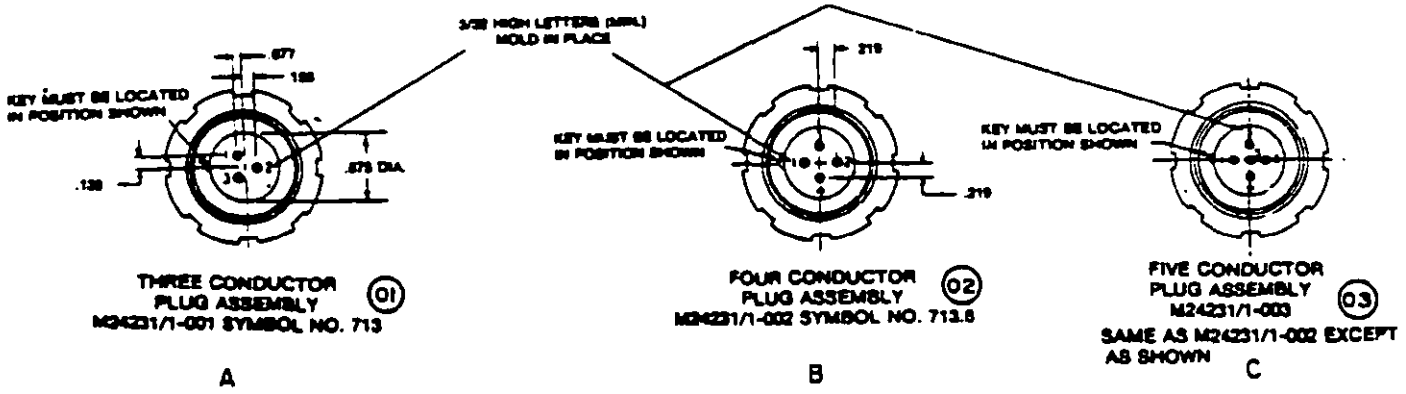

SH 9668-A

FIGURE 1. Connector, plug, molded, three-, four-, and five-conductor.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:11Z
Check the source to verify that this is the current version before use.

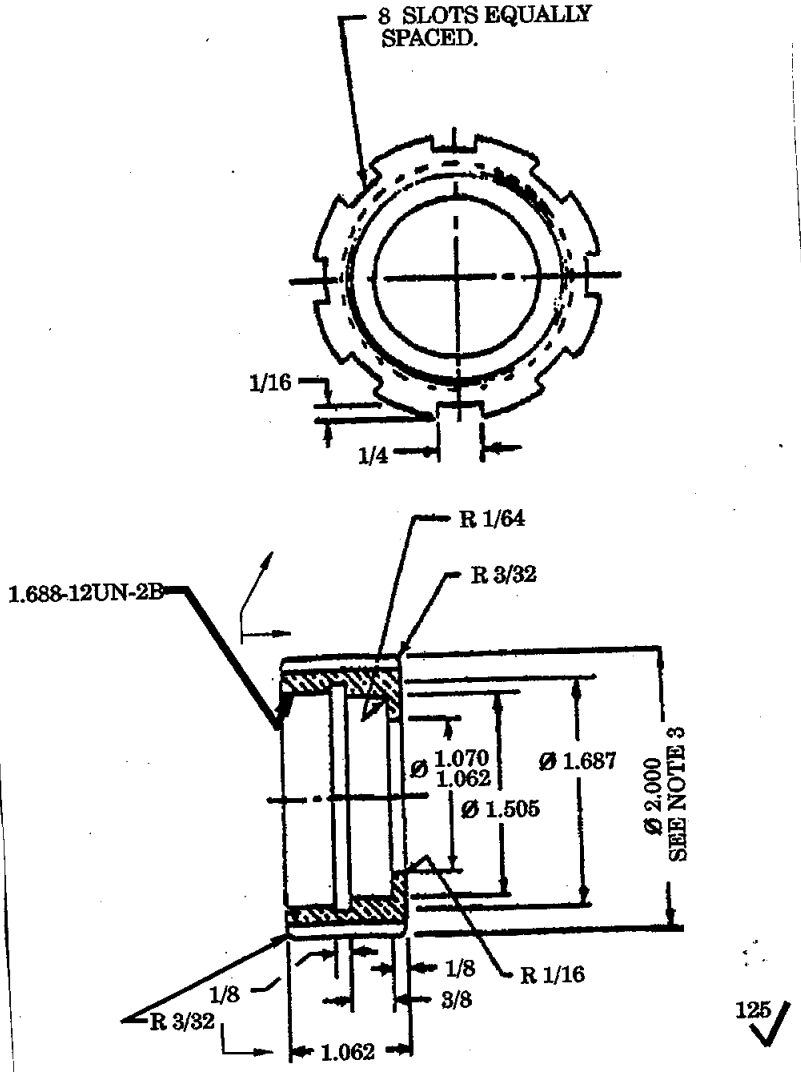


FIGURE 3. Plug sleeve - M24231/1-010. (04)

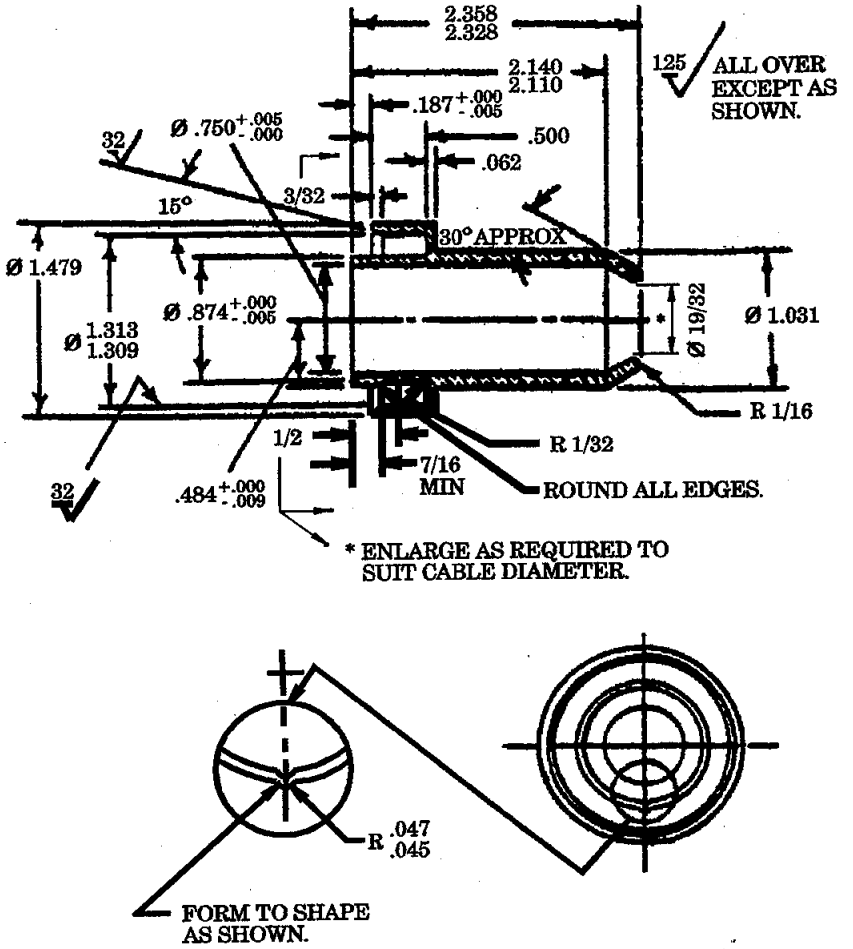


FIGURE 2. Sealing plug. (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

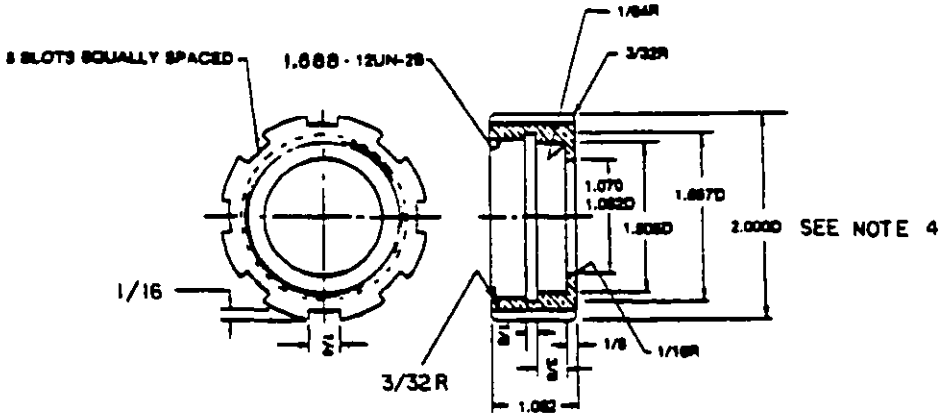


FIGURE 4. Coupling - M24231/1-011. (05)


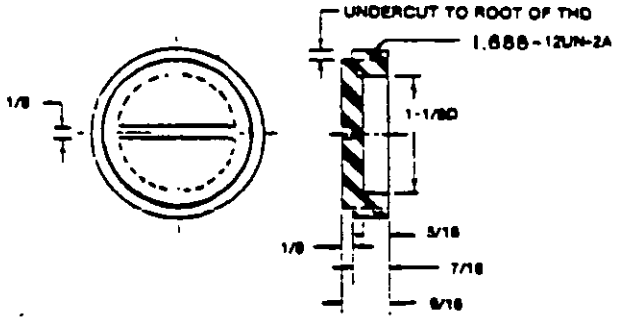


FIGURE 5. Protective cap - M24231/1-012. (06)

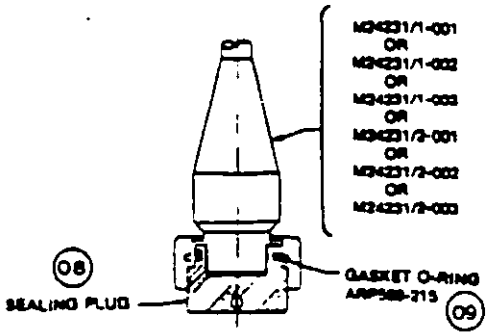

SH 9668-2A

FIGURE 6. Sealing plug assembly - M24231/1-020. (15)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. See MIL-C-24231, appendix A, 30.5, table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/1- 3/ 001	002	003	Material/specification	Remarks
01	Plug assembly, 3-conductor, symbol no. 713	1			7/	See figure 1A
02	Plug assembly, 4-conductor, symbol no. 713.6		1		7/	See figure 1B
03	Plug assembly, 5-conductor			1	7/	See figure 1C
04	Sleeve, plug	1	1	1	Ni-Cu, class A, QQ-N-281	See figure 3
05	Coupling	1	1	1	Ni-Al-BRZ, QQ-C-465	See figure 4
06	Cap, protective	1	1	1	Plastic, type MFI-20 or MAI-60, MIL-M-14 or polycarbonate L-P-393 4/	Nonpressure-proof, see figure 5
07	Insulating disk	1	1	1	Non-laminated plastic, composition A, type II, grade GU, L-P-535	See figure 2
08	Sealing plug 6/	1	1	1	Ni-Cu, class A, QQ-N-281	Pressure-proof, see figure 2
09	O-ring gasket	1	1	1	MS28775-215	Lubricate with silicone compound, MIL-S-8660, see figure 5
10	Compound, polyurethane	As required			Category A, type I, MIL-M-24041	See figure 1
11	Cable	As required			See ordering data	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20261019T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/1- 3/ 001	002	003	Material/specification	Remarks
12	Insert assembly (3-pin)	1			M24231/29-001	See figure 1
13	Insert assembly (4-pin)		1		M24231/29-002	See figure 1
14	Insert assembly (5-pin)			1	M24231/29-010	See figure 1
15	Sealing plug assembly	1	1	1	See items 10 and 11	See figure 6
16	Compound, epoxy	As required			Cast epoxy resin compound 5/	See figure 1

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ May be Ni-Al-RRZ in accordance with QQ-C-465 at the option of manufacturer.
5/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.
6/ To be supplied when specified by the contract or purchase order (see 6.2.1).
7/ When plugs are purchased as a kit the inserts are not molded per MIL-C-24231/29. The pins and sleeving are individually provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. Outside diameter may vary slightly after machine clean-up when 2-inch bar stock is used.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.