MIL-C-24231/2D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/2C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET


CONNECTOR, PLUG, TYPE I, 90-DEGREE, MOLDED, THREE-, FOUR-, AND FIVE-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molded plug described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

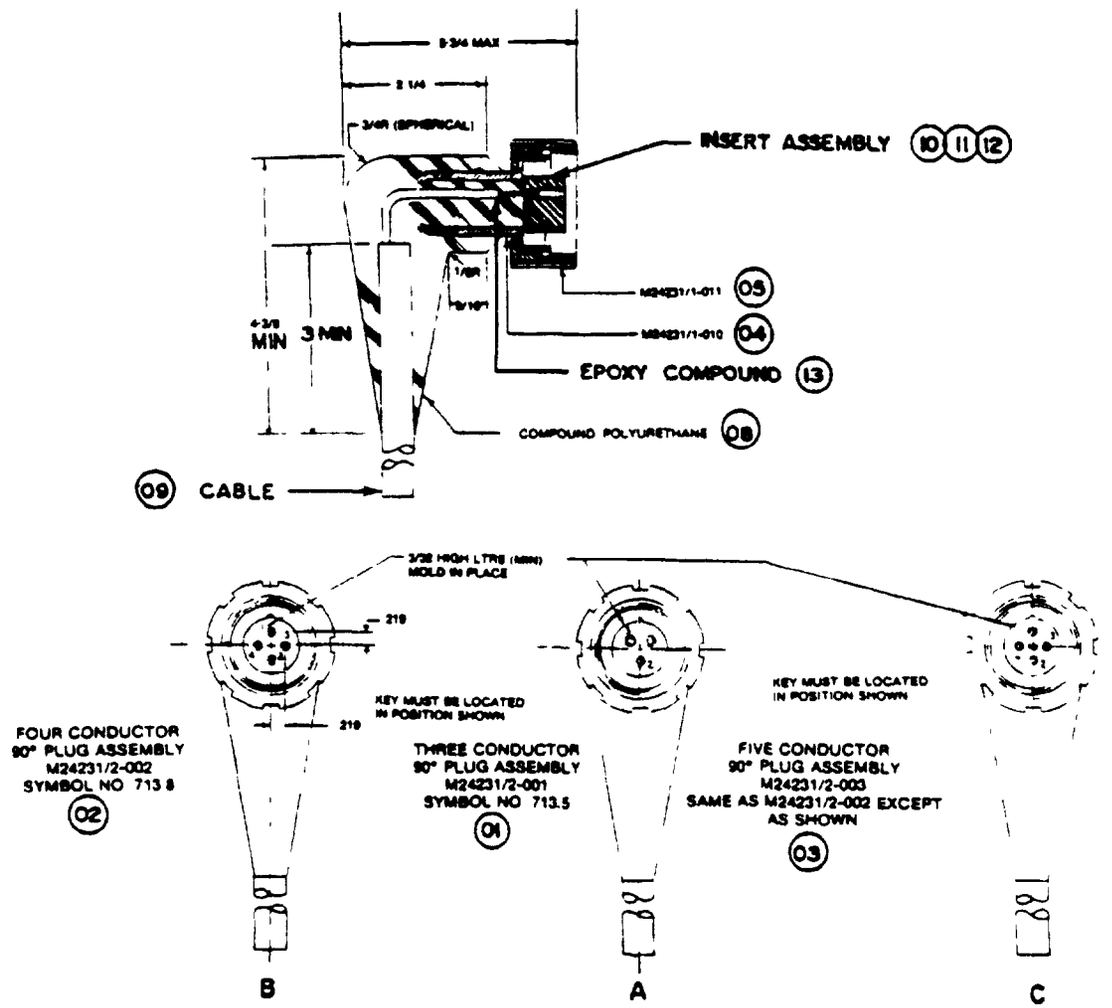

SH 9669

FIGURE 1. Connector, plug, 90-degree, molded, three-, four-, and five-conductor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration. See figures.
2. For deletion of cable shielding, see requirement 2 of MIL-C-24231/1.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/2- 3/ 001	002	003	Material/specification	Remarks
01	Plug assembly, 90 degrees, 3-conductor, symbol no. 713.5	1			5/	See figure 1A
02	Plug assembly, 90 degrees, 4-conductor, symbol no. 713.8		1		5/	See figure 1B
03	Plug assembly, 90 degrees, 5-conductor			1	5/	See figure 1C
04	Sleeve, plug	1	1	1	M24231/1-010	See figure 1
05	Coupling	1	1	1	M24231/1-011	See figure 1
06	Cap, protective	1	1	1	M24231/1-012	Nonpressure-proof
07	Sealing plug assembly	1	1	1	M24231/1-020	Pressure-proof
08	Compound, polyurethane	As required			Category A, type I, MIL-M-24041	See figure 1
09	Cable	As required			See ordering data	See figure 1
10	Insert assembly (3-pin)	1			M24231/29-001	See figure 1
11	Insert assembly (4-pin)		1		M24231/29-002	See figure 1
12	Insert assembly (5-pin)			1	M24231/29-010	See figure 1
13	Compound epoxy	As required			Cast epoxy resin compound 4/	See figure 1

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.
5/ When plugs are purchased as a kit, the inserts are not molded in accordance with MIL-C-24231/29. The pins and sleeves are individually provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.