INCH-POUND
MIL-DTL-24231/2E(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/2D(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

# CONNECTOR, PLUG, TYPE I, 90-DEGREE, MOLDED, THREE-, FOUR-, AND FIVE-CONDUCTOR

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figure 1.
2. For termination of cable shield, see table of cable types for molded plugs in MIL-DTL-24231.
3. Ni-Cu plug sleeves shall be coated with plasma spray non-conductive material in accordance with S9320-AM-PRO-030/MLDG.
4. All dimensions are in inches.
5. Tolerances shall be as follows, or as stated:
   a. Decimals – ±0.005 inch.
   b. Fractions – ±1/64 inch.
   c. Angular dimensions – ±½ degree.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

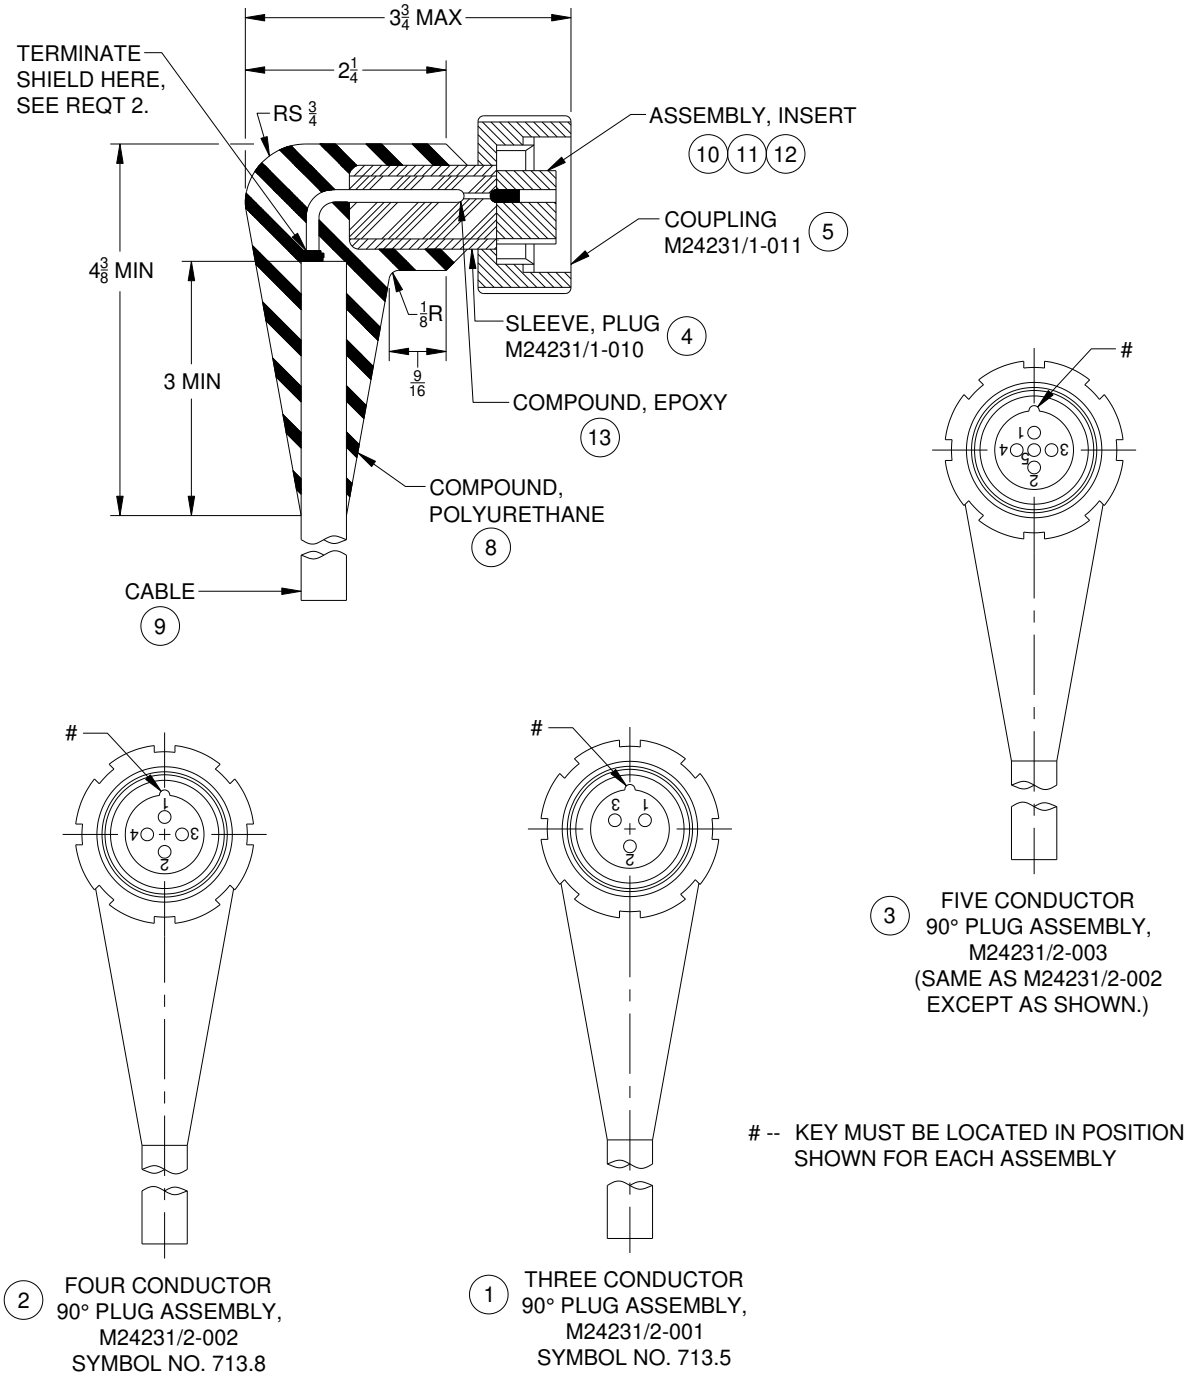



FIGURE 1. Connector, plug, 90-degree, molded, three-, four-, and five-conductor.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

| Item no. 1/ | Description 2/ | Quantity for M24231/2- 3/ | | | Material/specification | Remarks |
|---|---|---|---|---|---|---|
| | | 001 | 002 | 003 | | |
| 1 | Plug assembly, 90 degrees, 3-conductor, symbol no. 713.5 | 1 | | | 4/ | See figure 1. |
| 2 | Plug assembly, 90 degrees, 4-conductor, symbol no. 713.8 | | 1 | | 4/ | See figure 1. |
| 3 | Plug assembly, 90 degrees, 5-conductor | | | 1 | 4/ | See figure 1. |
| 4 | Sleeve, plug | 1 | 1 | 1 | M24231/1-010 | See figure 1. |
| 5 | Coupling | 1 | 1 | 1 | M24231/1-011 | See figure 1. |
| 6 | Cap, protective | 1 | 1 | 1 | M24231/1-012 | Nonpressure-proof |
| 7 | Sealing plug assembly | 1 | 1 | 1 | M24231/1-020 | Pressure-proof |
| 8 | Compound, polyurethane | As required | | | 5/ | See figure 1. |
| 9 | Cable | As required | | | 6/ | See figure 1. |
| 10 | Insert assembly (3-pin) | 1 | | | M24231/29-001 | See figure 1. |
| 11 | Insert assembly (4-pin) | | 1 | | M24231/29-002 | See figure 1. |
| 12 | Insert assembly (5-pin) | | | 1 | M24231/29-010 | See figure 1. |
| 13 | Compound epoxy resin | As required | | | Cast epoxy resin compound 7/ | Base EE4183 or RE2039, hardener HD-3561; see figure 1. |

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ When plugs are purchased as a kit, the inserts are not molded in accordance with MIL-DTL-24231/29. The socket contacts and sleeving are individually provided.

5/ Molding compound to be procured in accordance with S9320-AM-PRO-020.

6/ For cable type, see table for cross indexing of mating plugs, receptacles, adapters, and single and multiple cable connectors of MIL-DTL-24231.

7/ Hysol base EE4183 or RE2039, hardener HD-3561, Hysol Division, Dexter Corporation, Olean, NY, CAGE 04347, or equal.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-051)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.