
Ⓒ


MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, MOLDED, SEVEN- AND NINE-CONDUCTOR (STRAIGHT AND 90 DEGREES)

Ⓒ This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the molded plug described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

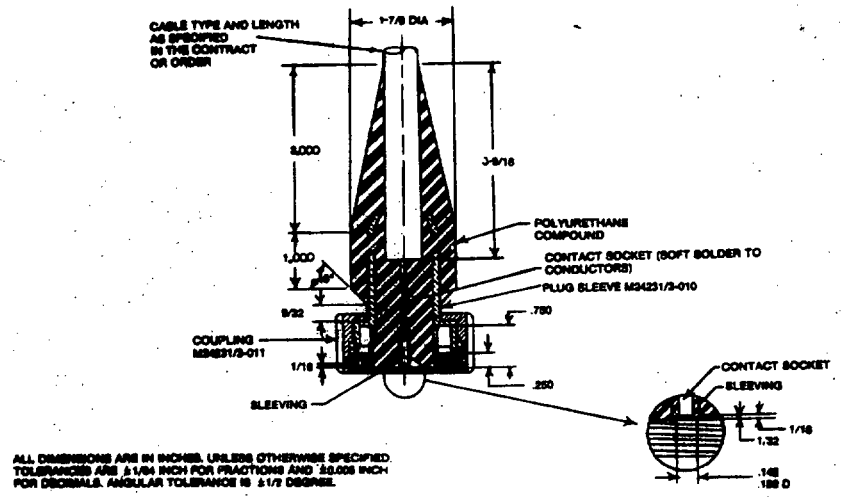

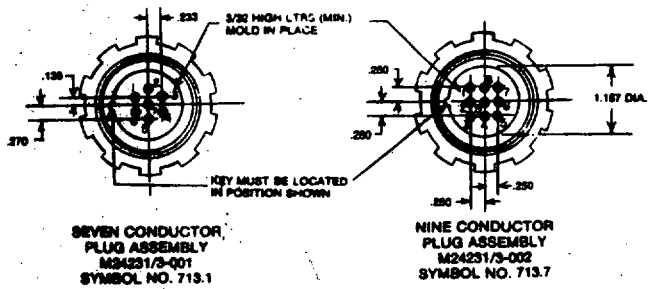


Ⓒ Denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

SEALING PLUG

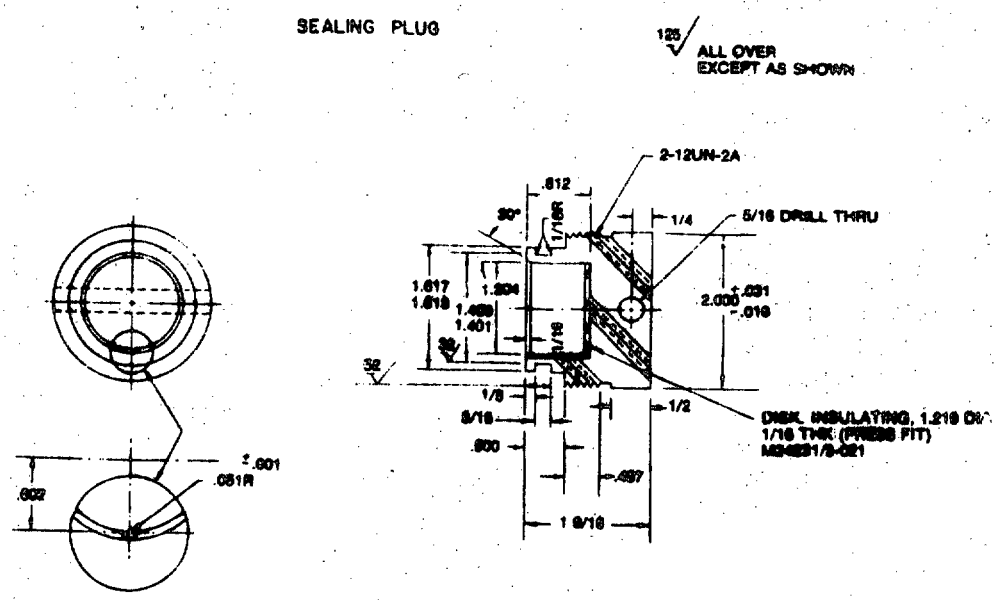

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.


PLUG SLEEVE
M24231/3-010

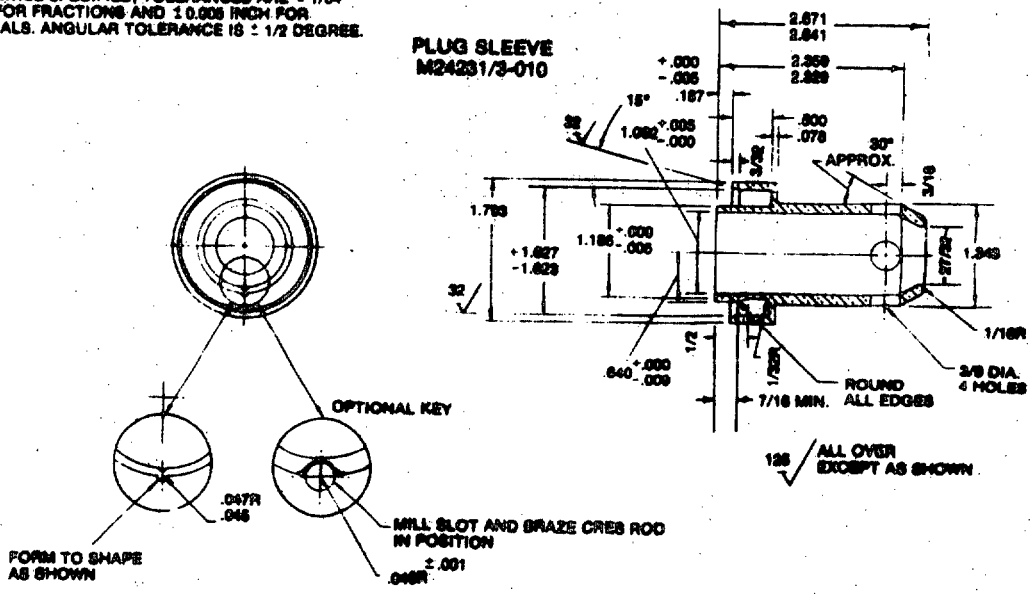


DMS670-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

COUPLING
M24231/3-011

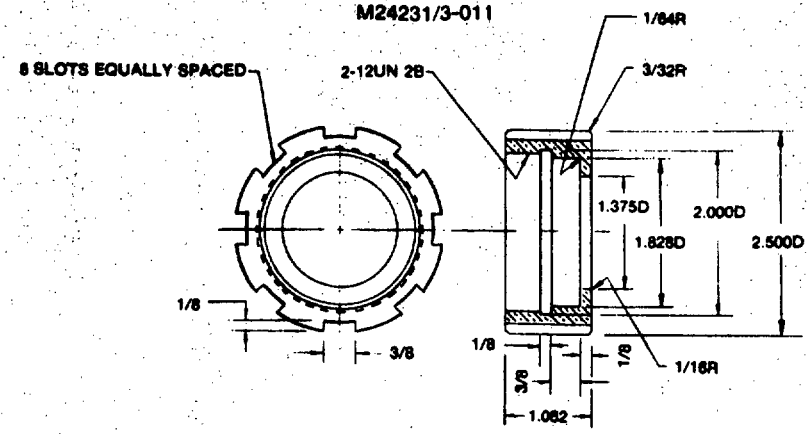

CAP, PLUG
M24231/3-012

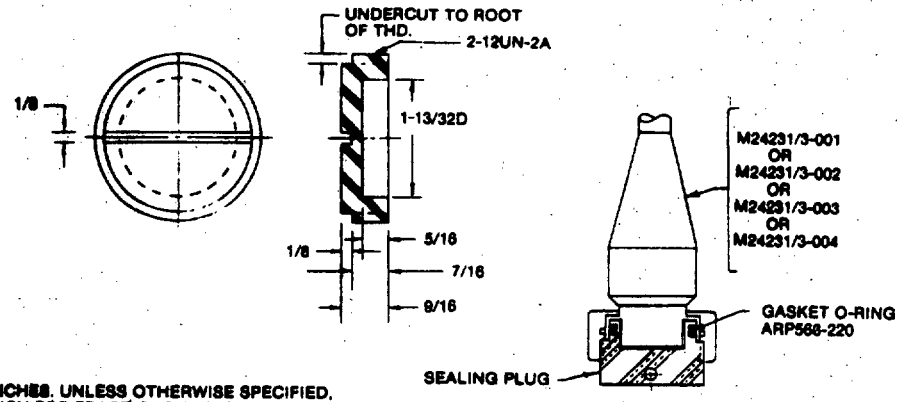



ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.

SEALING PLUG ASSEMBLY
M24231/3-020

SH9670-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

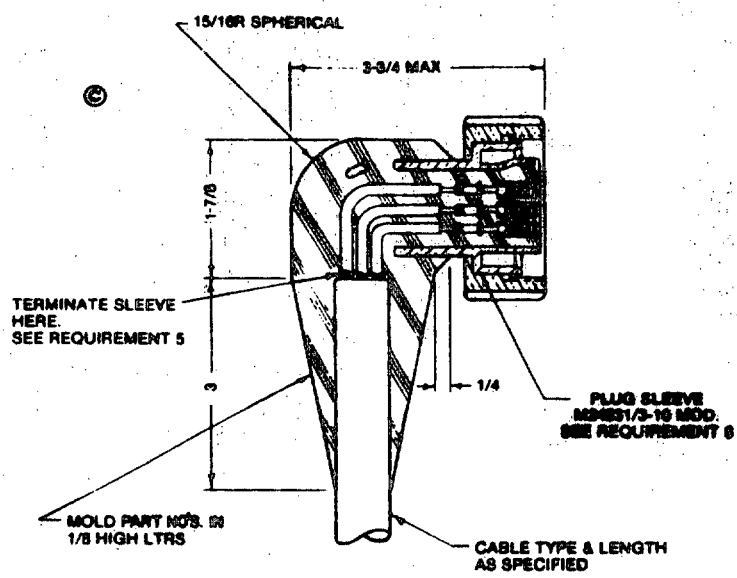



SEVEN CONDUCTOR
90° PLUG ASSEMBLY M24231/3-003
SAME AS M24231/3-001 EXCEPT
AS SHOWN

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS and ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.



NINE CONDUCTOR
90° PLUG ASSEMBLY M24231/3-004
SAME AS M24231/3-002 EXCEPT
AS SHOWN

SH 9670-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. The seven-conductor plug assembly requires seven contact sockets and seven lengths of sleeving.
3. The nine-conductor plug assembly requires nine contact sockets and nine lengths of sleeving.
4. The material for the sealing plug shall be monel, class A of QQ-N-281.
5. For deletion of cable shielding, see requirement 6 of MIL-C-24231/1.
6. Sleeve M24231/3-010 may be modified prior to assembly by drilling or slotting to allow cable entry from the side. Round all sharp edges.

Preparing activity:
Navy - SH
(Project 5935-N842-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: **In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.**

NOTE: **This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.**

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 61247
PRINCE GEORGE'S CENTER
HYATTSVILLE, MARYLAND 20782

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.