MIL-C-24231/3D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/3C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET


CONNECTOR, PLUG, TYPE I, MOLDED, SEVEN- AND NINE-CONDUCTOR (STRAIGHT AND 90 DEGREES)


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molded plug described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

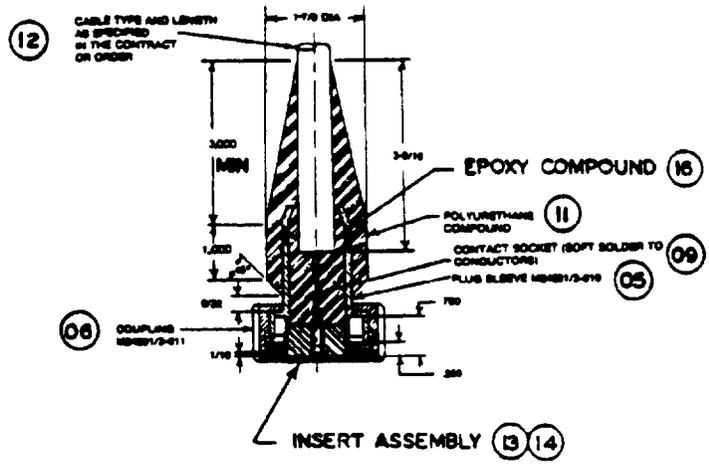

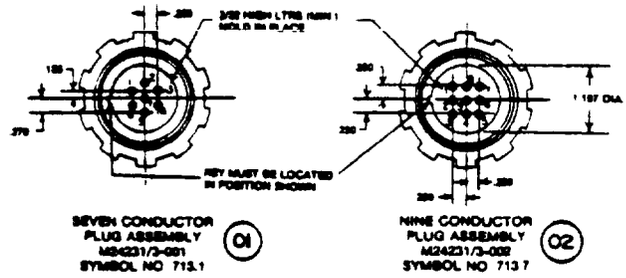

SII 9670

FIGURE 1. Connector, plug, molded, seven- and nine-conductor (straight).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.


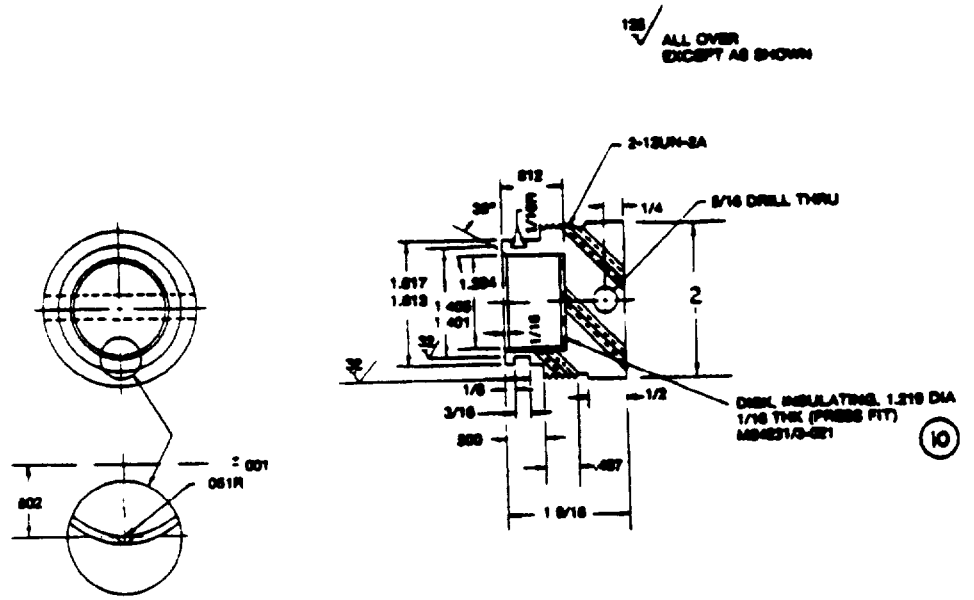


FIGURE 2. Sealing plug. (08)

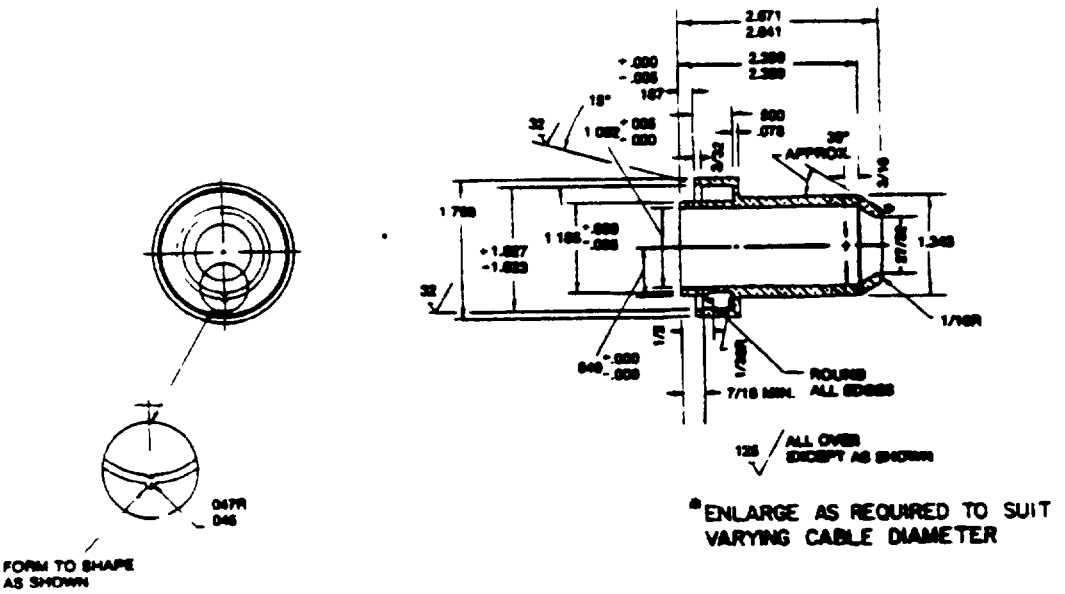

SH 9670-1

FIGURE 3. Plug sleeve - M24231/3-010. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

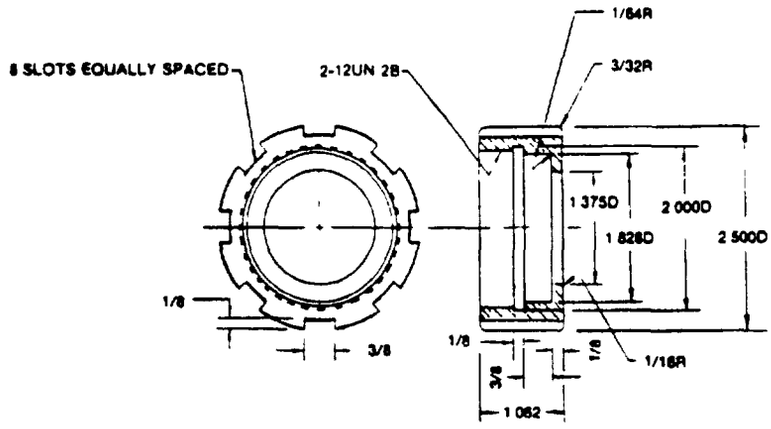


FIGURE 4. Coupling - M24231/3-011. (06)


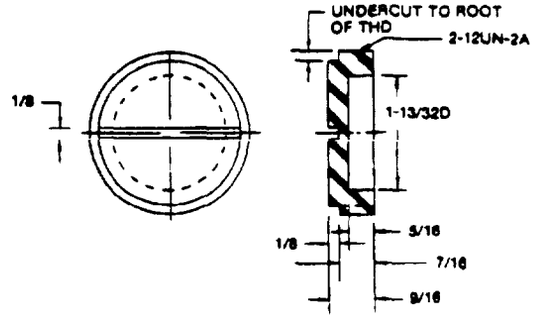



FIGURE 5. Cap, protective - M24231/3-012. (07)

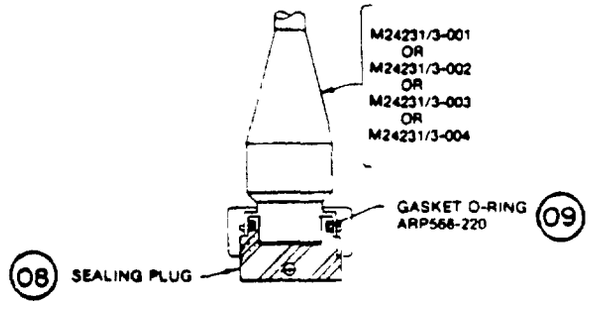

SH 9670-2

FIGURE 6. Sealing plug assembly - M24231/3-020. (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

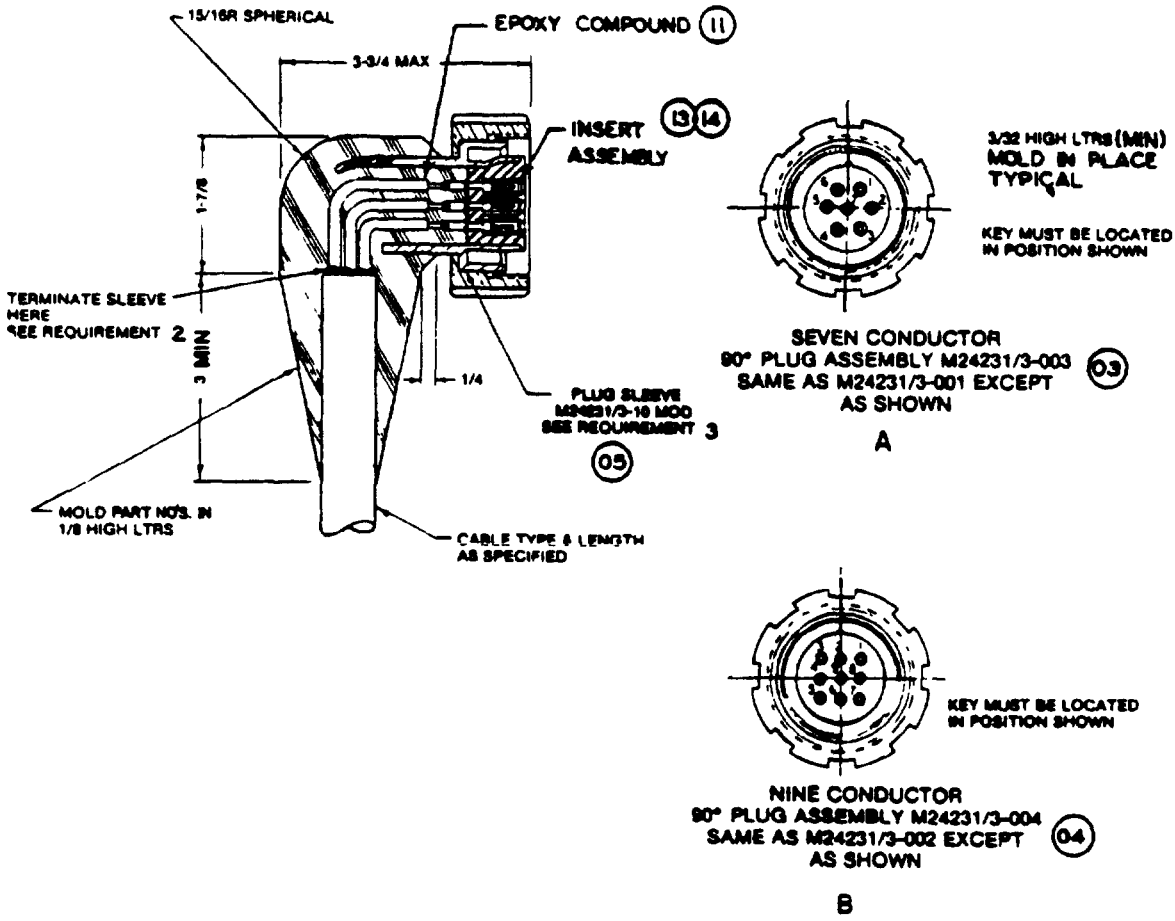

SH 9670-3

FIGURE 7. Connector, plug, molded, - seven- and nine-conductor (90-degree).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. For deletion of cable shielding, see requirement 2 of MIL-C-24231/1.
3. Sleeve M24231/3-010 may be modified prior to assembly by drilling or slotting to allow cable entry from the side. Sharp edges shall be rounded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/3- 3/ 001	002	003	004	Material/specification	Remarks
01	Plug assembly, 7-conductor, symbol no. 713.1	1				6/	See figure 1A
02	Plug assembly, 9-conductor, symbol no. 713.7		1			6/	See figure 1B
03	Plug assembly, 90 degrees, 7-conductor			1		6/	See figure 7A
04	Plug assembly, 90 degrees, 9-conductor				1	6/	See figure 7B
05	Sleeve, plug	1	1	1	1	Ni-Cu, class A, QQ-N-281	See figure 3 and requirement 3
06	Coupling	1	1	1	1	Ni-Al-BRZ, QQ-C-465	See figure 4
07	Cap, protective	1	1	1	1	Plastic, type MFI-20 or MAI-60, MIL-M-14 or polycarbonate L-P-393 5/	Nonpressure-proof, see figure 5
08	Sealing plug	1	1	1	1	Ni-Cu, class A, QQ-N-281	Pressure-proof, see figures 2 and 6
09	O-ring gasket	1	1	1	1	MS28775-220	Lubricate with silicone compound, MIL-S-8660, see figure 6
10	Insulating disk	1	1	1	1	Non-laminated plastic, composition A, type II, grade GU, L-P-535	See figure 2
11	Compound, polyurethane	As required				Category A, type I, MIL-M-24041	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/3- 3/				Material/specification	Remarks
		001	002	003	004		
12	Cable	As required				See ordering data	See figure 1
13	Insert assembly, 7-conductor	1		1		M24231/29-004	See figure 1
14	Insert assembly, 9-conductor		1		1	M24231/29-005	See figure 1
15	Sealing plug, assembly	1	1	1	1	See items 08 and 09	See figure 6
16	Compound, epoxy	As required				Cast epoxy resin compound 4/	See figures 1 and 7

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.
5/ May be Ni-Al-BRZ in accordance with QQ-C-465 at the option of manufacturer.
6/ When plugs are purchased as a kit the inserts are not molded in accordance with MIL-C-24231/29. The pins and sleeving are individually provided.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:11Z
Check the source to verify that this is the current version before use.