MIL-C-24231/4D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/4C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

CONNECTORS, PLUG, TYPE I, MOLDED, 14-, 24-, 30-, OR 40-CONDUCTOR (STRAIGHT AND 90 DEGREES)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molded plug described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.


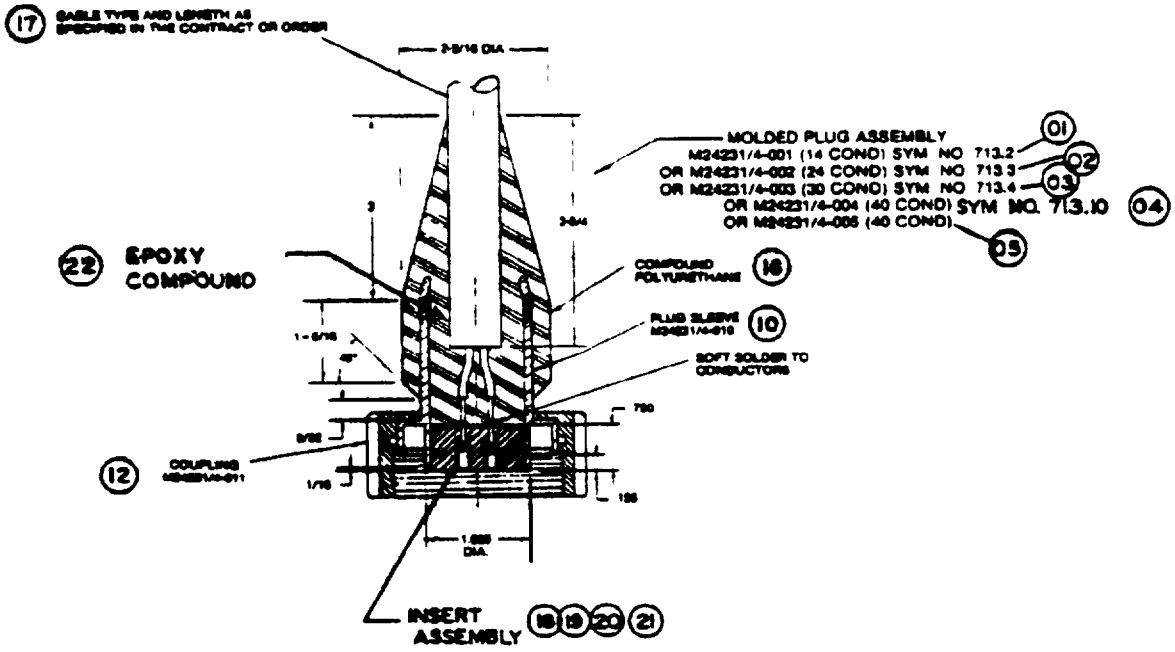


FIGURE 1. Connector, plug, molded - typical.

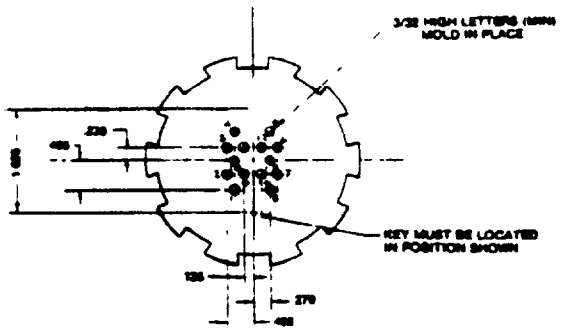

SH 9671

FIGURE 2. Connector, plug, 14-conductor (straight) M24231/4-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.


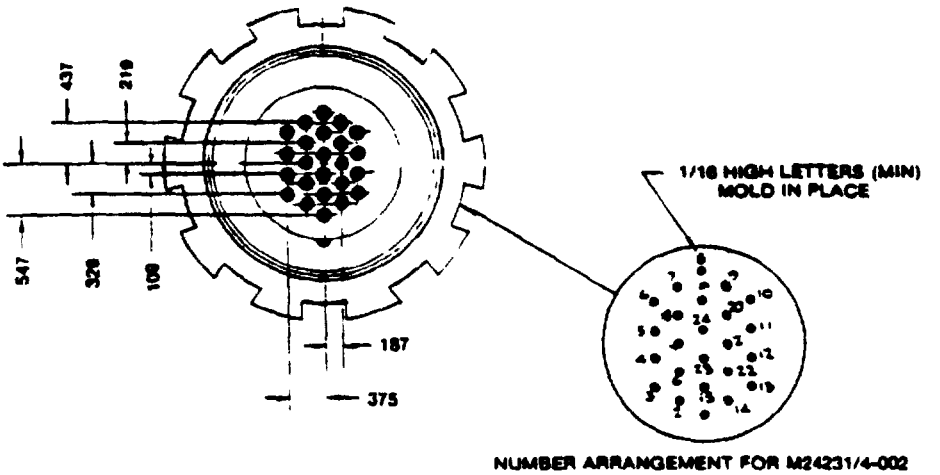


FIGURE 3. Connector, plug, molded, 24-conductor (straight) M24231/4-002. (02)

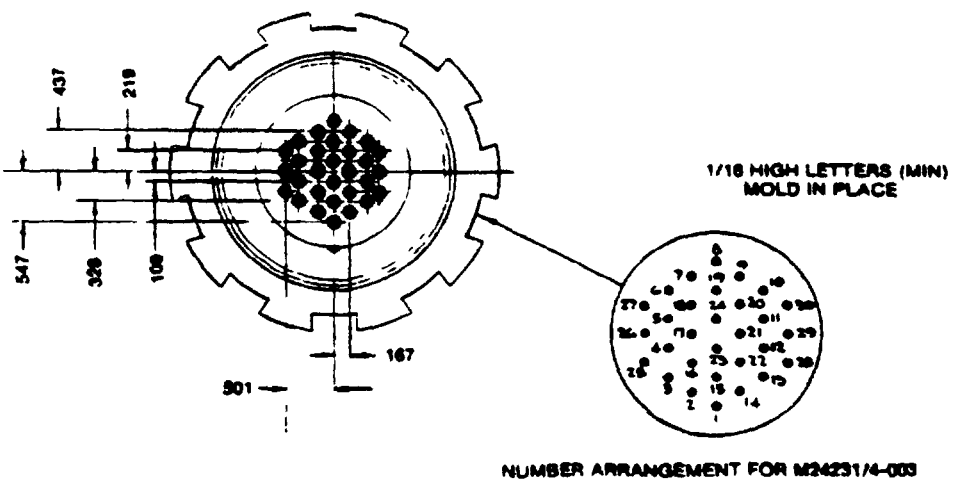

SH 9671-1

FIGURE 4. Connector, plug, molded, 30-conductor (straight) M24231/4-003. (03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

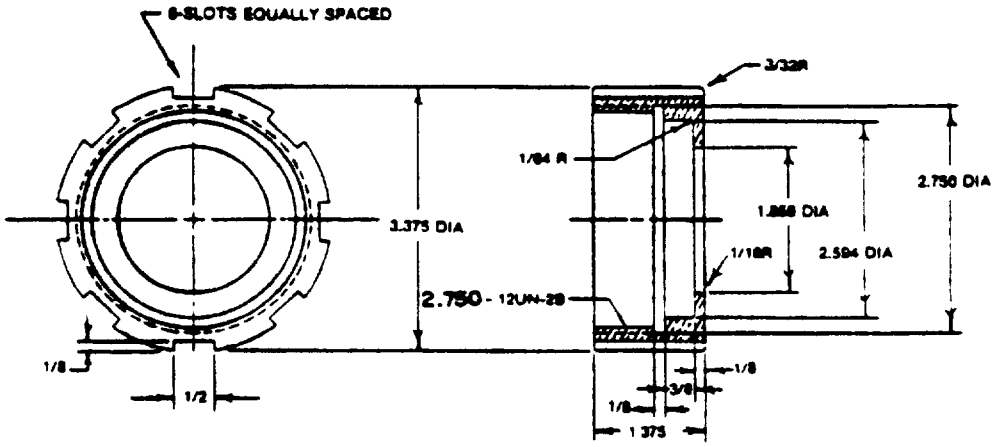


FIGURE 5. Coupling - M24231/4-011. (12)


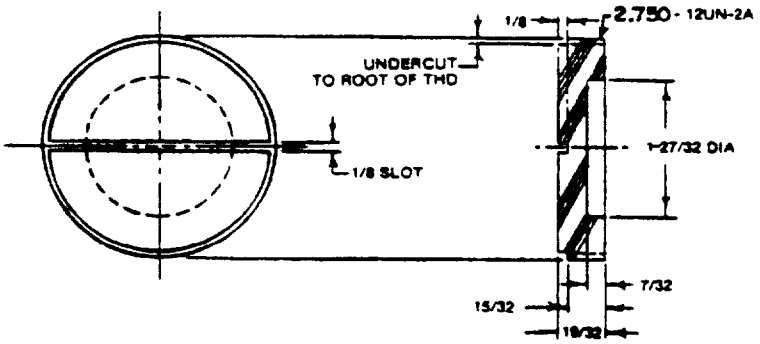


FIGURE 6. Protective cap - M24231/4-012. (11)

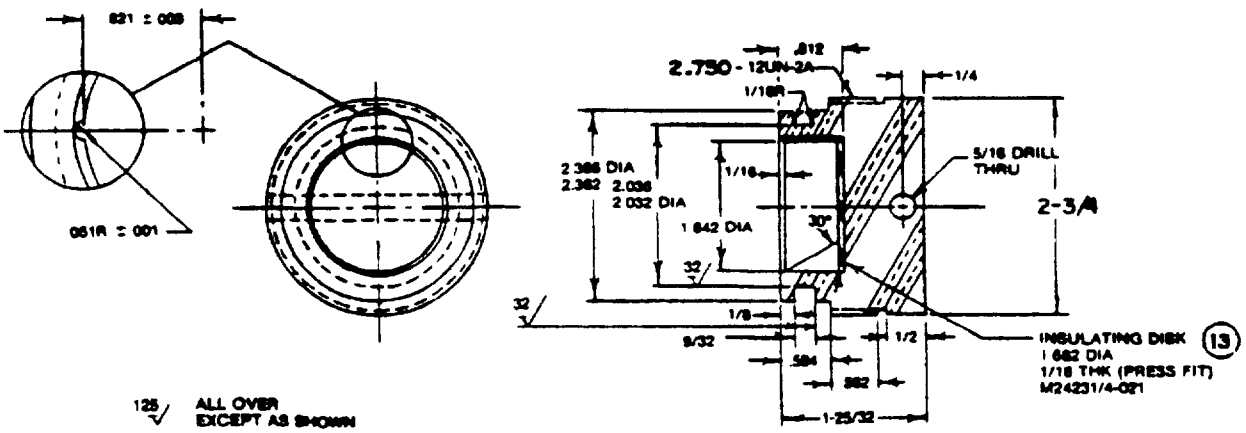

SH 9671-2

FIGURE 7. Sealing plug. (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.


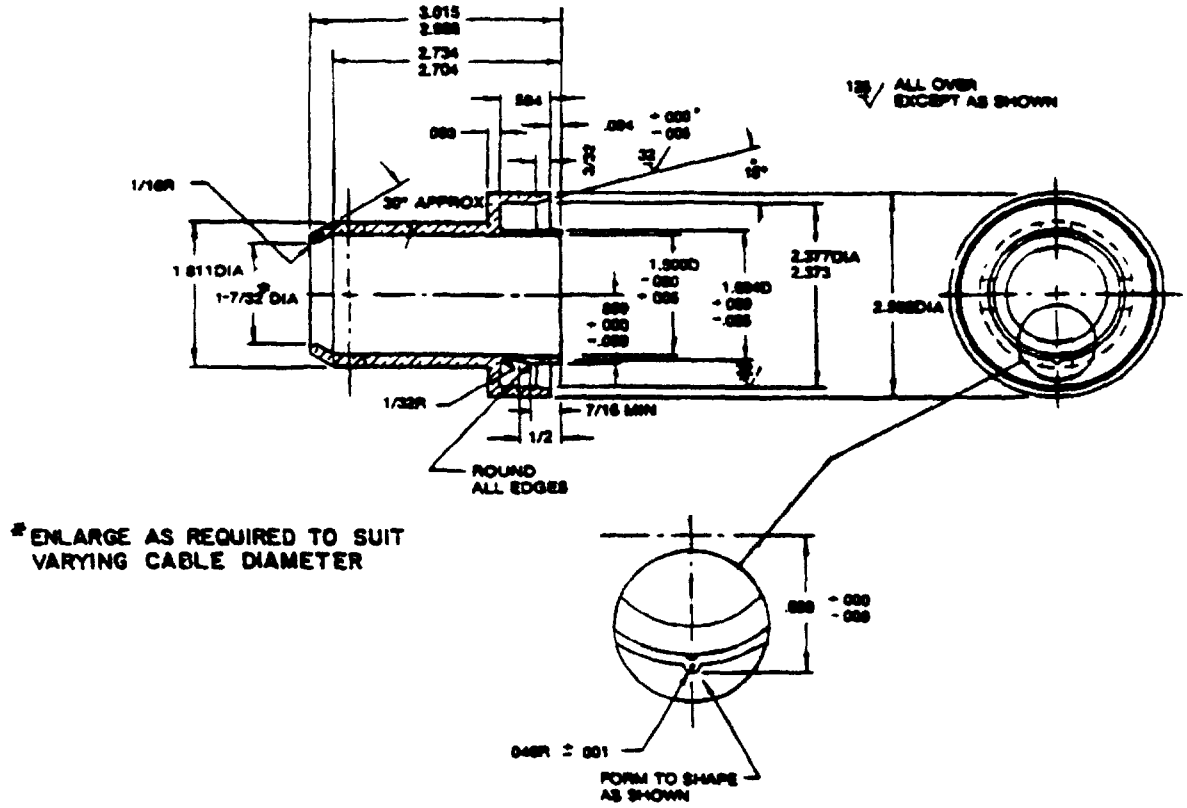


FIGURE 8. Plug sleeve - M24231/4-010. (10)

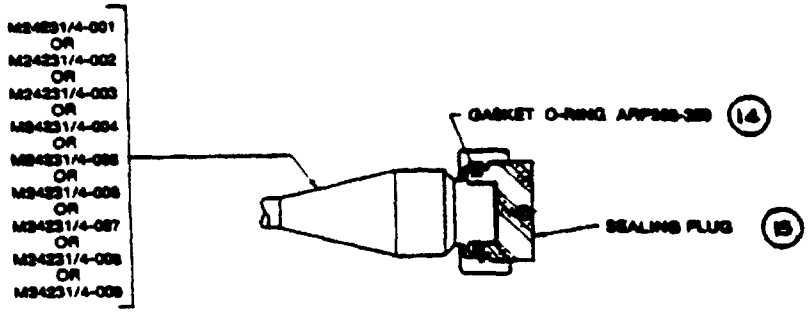


SH 9671-3

FIGURE 9. Sealing plug assembly - M24231/4-020. (23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.


NOTE: M24231/4-004 and M24231/4-005 are physically the same. The part numbers define usage (see appendix A of MIL-C-24231).

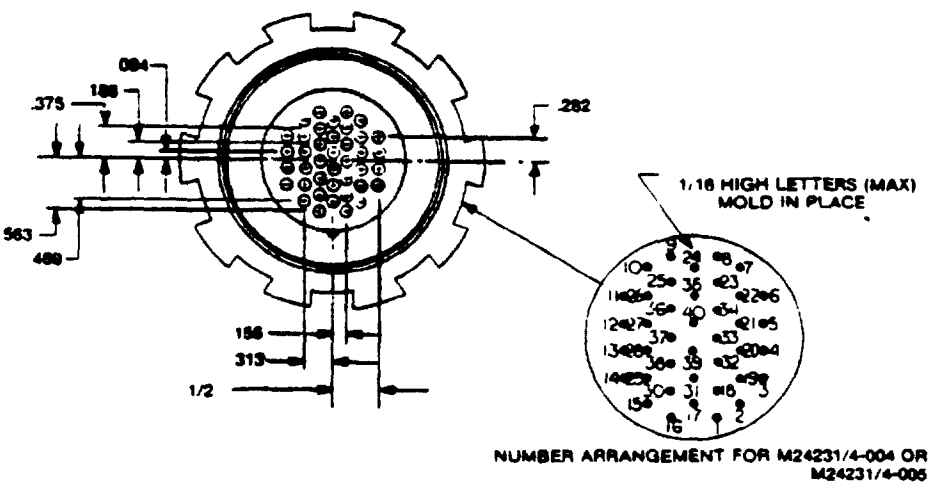

SH 9671-4

FIGURE 10. Connector, plug, molded, 40-conductor - M24231/4-004, M24231/4-005, and M24231/4-009. (04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

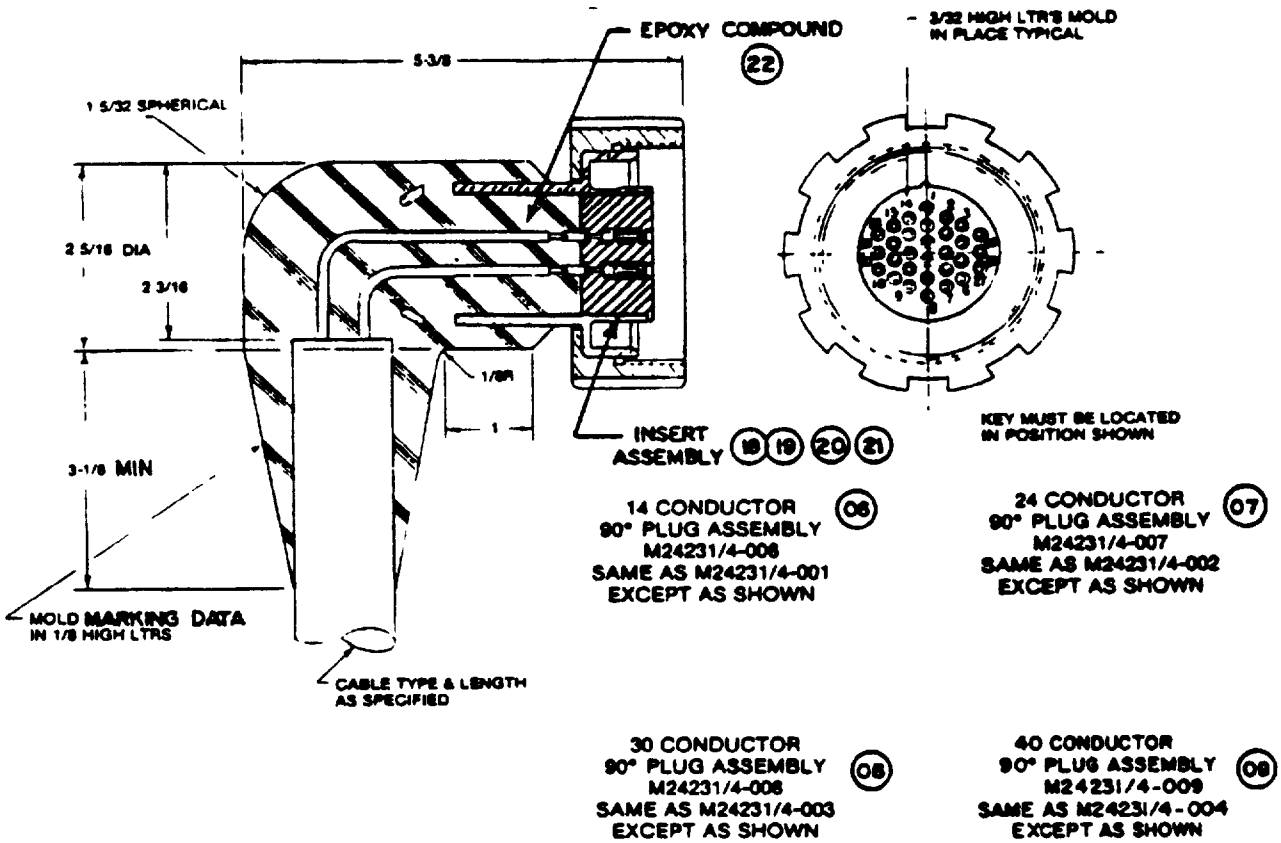

SH 9671-5

FIGURE 11. Connector, plug, molded, 14-, 24-, 30-, and 40-conductor (90-degree).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. **Dimensions and configuration:** See figures.
2. For cable wiring connections, see applicable table in the appendix A of MIL-C-24231.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/4- 3/									Material/specification	Remarks
		001	002	003	004	005	006	007	008	009		
01	Plug assembly, 14-conductor, symbol no. 713.2	1									-----	See figure 2
02	Plug assembly, 24-conductor, symbol no. 713.3		1								-----	See figure 3
03	Plug assembly, 30-conductor, symbol no. 713.4			1							-----	See figure 4
04	Plug assembly, 40-conductor, symbol no. 713.10				1						-----	See figure 10
05	Plug assembly, 40-conductor					1					-----	See note on figure 10
06	Plug assembly, 90 degrees, 14-conductor						1				-----	See figure 11
07	Plug assembly, 90 degrees, 24-conductor							1			-----	See figure 11
08	Plug assembly, 90 degrees, 30-conductor								1		-----	See figure 11
09	Plug assembly, 90 degrees, 40-conductor									1	-----	See figure 11
10	Sleeve, plug	1	1	1	1	1	1	1	1	1	Ni-Cu, class A, QQ-N-281	See figure 8
11	Cap, protective	1	1	1	1	1	1	1	1	1	Plastic, type MFI-20 or MAI-60, MIL-M-14 or polycarbonate L-P-393 5/	Nonpressure-proof, see figure 6

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/4- 3/ 001	002	003	004	005	006	007	008	009	Material/specification	Remarks
12	Coupling	1	1	1	1	1	1	1	1	1	Ni-Al-BRZ, QQ-C-465	See figure 5
13	Insulating disk, 1.662 diameter by 1/16 thick	1	1	1	1	1	1	1	1	1	Non-laminated plastic, composition A, type II, grade GU, L-P-535	See figure 7
14	Gasket, O-ring	1	1	1	1	1	1	1	1	1	MS28775-329	Lubricate with silicone compound, MIL-S-8660
15	Sealing plug	1	1	1	1	1	1	1	1	1	Ni-Cu, class A, QQ-N-281	Pressure-proof, see figures 3 and 7
16	Compound, polyurethane	As required									Category A, type I, MIL-M-24041	See figure 1
17	Cable	As required									See ordering data	See figure 1
18	Insert assembly, 14-conductor	1					1				M24231/29-006	See figure 1
19	Insert assembly, 24-conductor		1					1			M24231/29-007	See figure 1
20	Insert assembly, 30-conductor			1					1		M24231/29-008	See figure 1
21	Insert assembly, 40-conductor				1	1				1	M24231/29-009	See figure 1
22	Compound, epoxy	As required									Cast epoxy resin compound 4/	See figures 1 and 11
23	Sealing plug assembly	1	1	1	1	1	1	1	1	1	See items 14 and 15	See figure 9

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.
5/ May be Ni-Al-BRZ in accordance with QQ-C-465 at the option of the manufacturer.
6/ When plugs are purchased as a kit the inserts are not molded in accordance with MIL-C-24231/29. The pins and sleeving are indivdually provided.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-04)

☆U.S. GOVERNMENT PRINTING OFFICE 1988 - 505-433/80265

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.