
MILITARY SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, TYPE III, FOR DSS-3 CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the single cable connector described herein shall consist of this specification and the latest issue of MIL-C-24231.

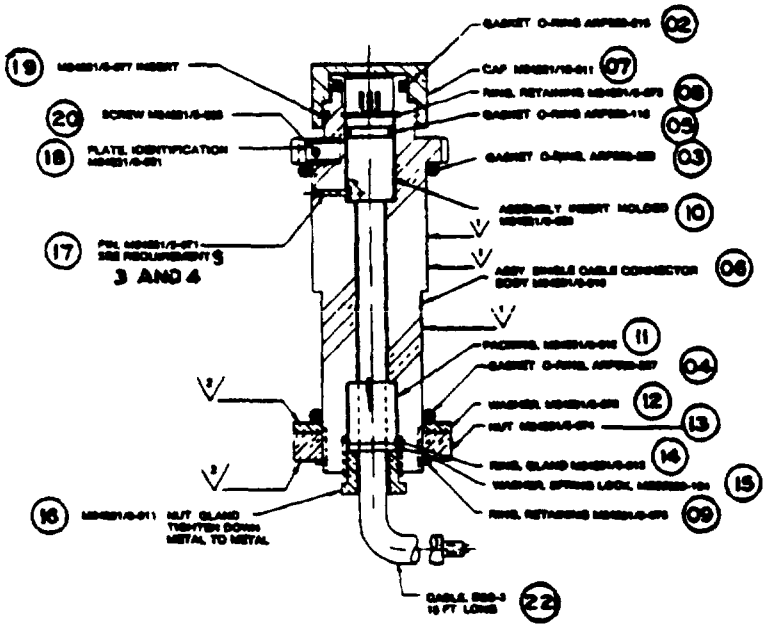

1/ Hardness reading to be taken at these points.

2/ Hardness reading to be taken at this face at 120-degree intervals.


SH 9673

FIGURE 1. Connector, single cable M24231/6-001, symbol no. 517.4. (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

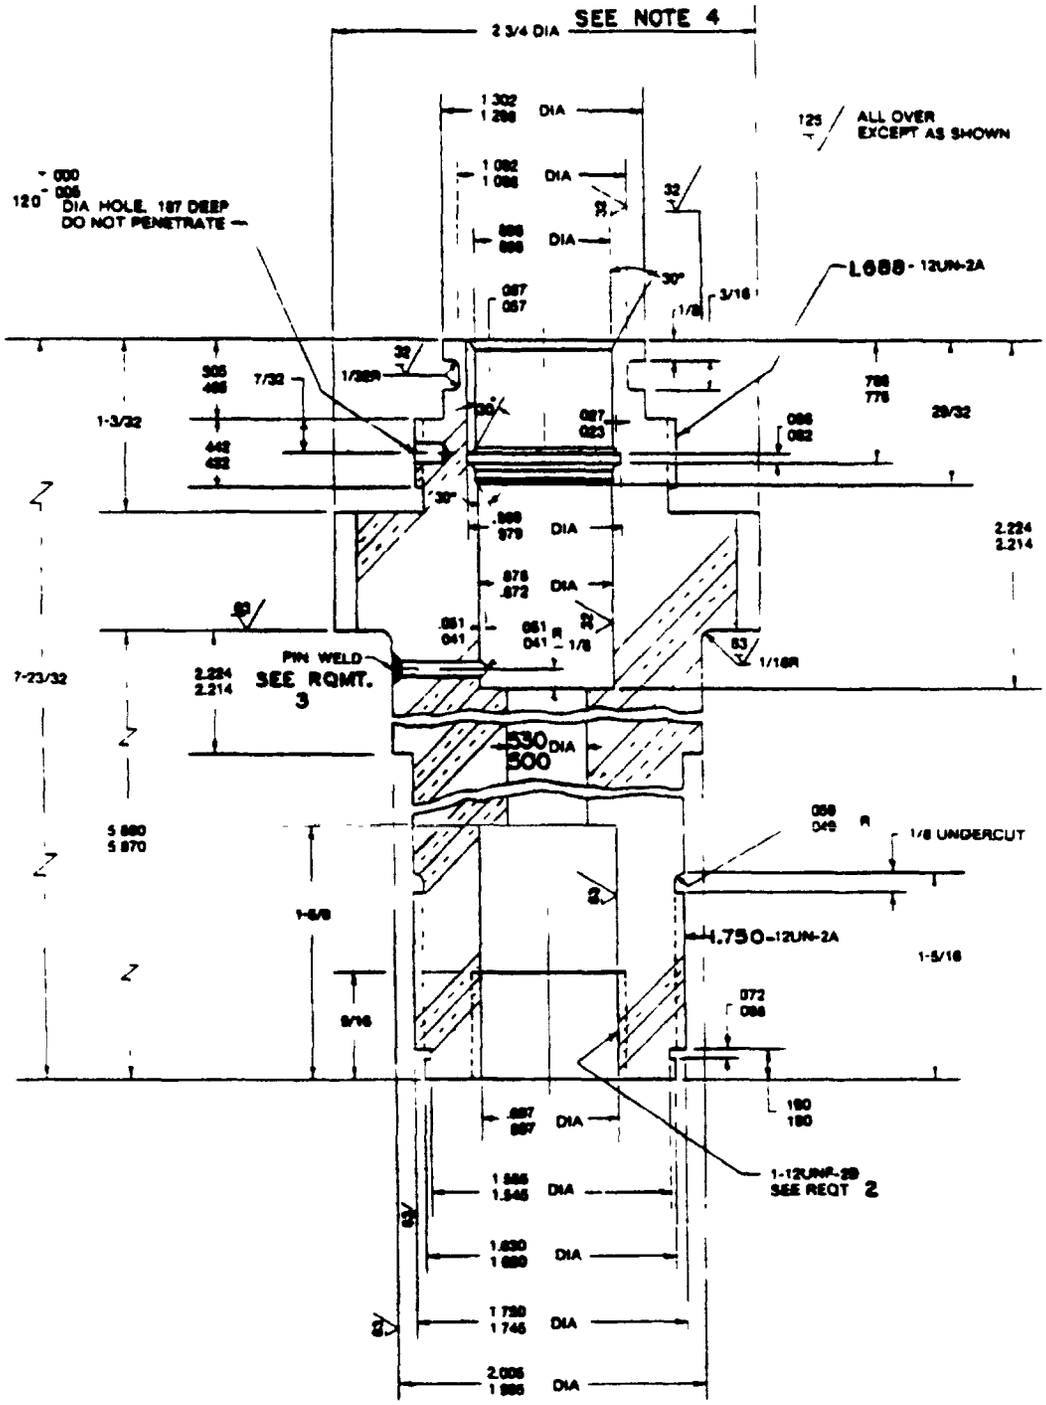

SH 9673-1

FIGURE 2. Assembly, single cable connector body - M24231/6-010. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

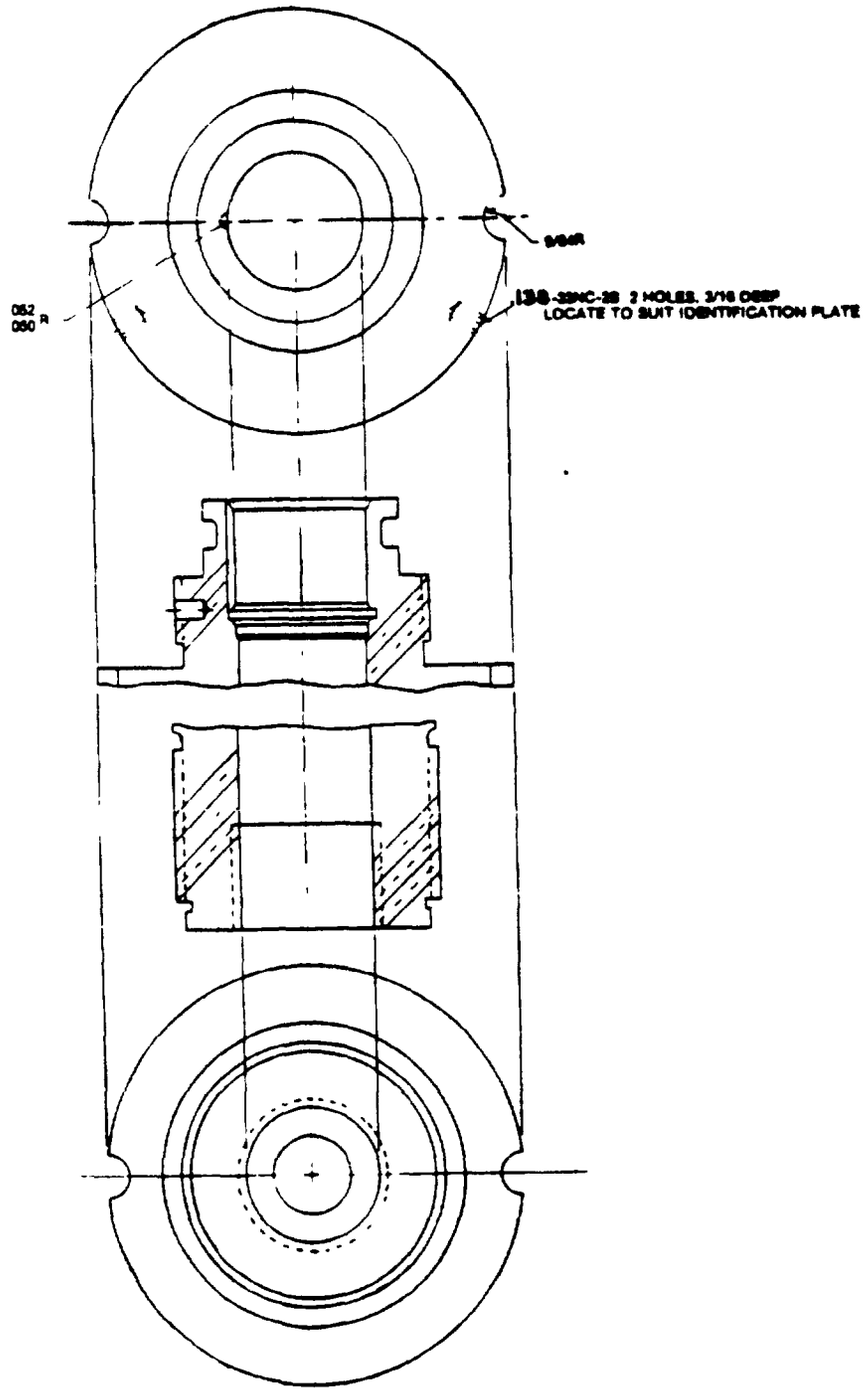

SH 9673-2

FIGURE 2. Assembly, single cable connector body - M24231/6-010. - Continued (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

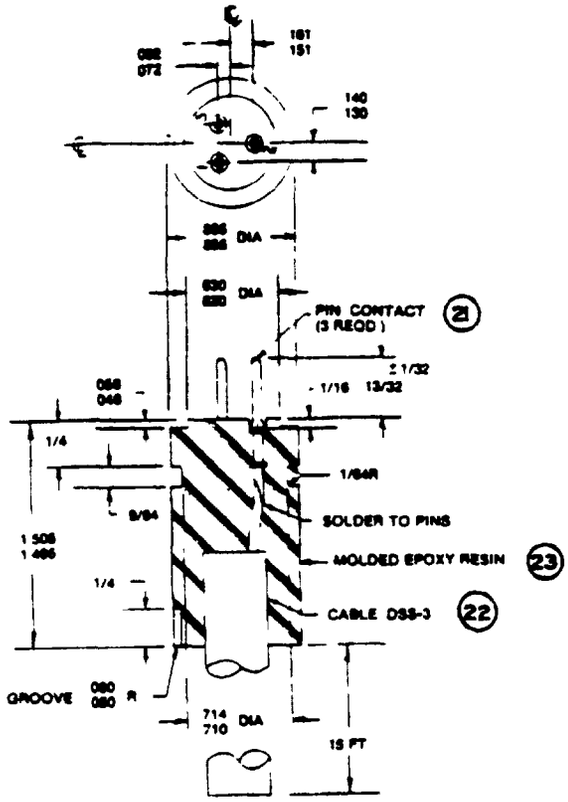


FIGURE 4. Assembly, insert, molded - M24231/6-020. (10)

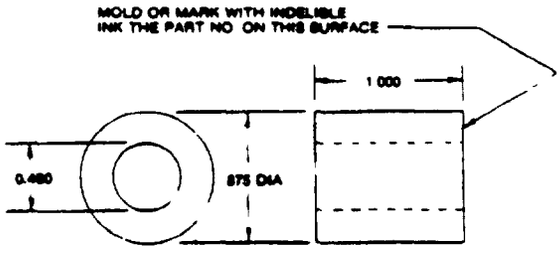


FIGURE 5. Packing, M24231/6-012. (11)

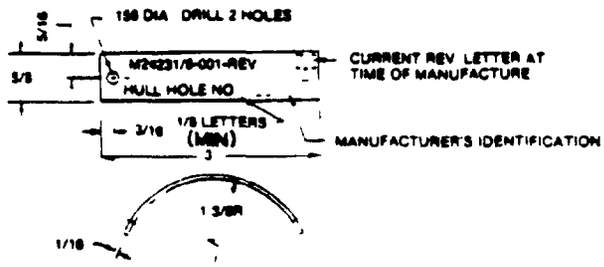


FIGURE 3. Plate identification - M24231/6-031. (18)

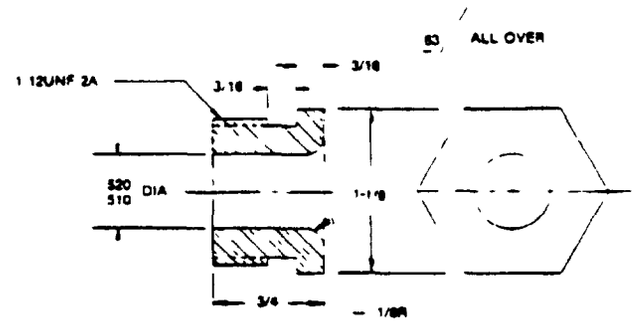


FIGURE 6. Nut, gland - M24231/6-011. (16)

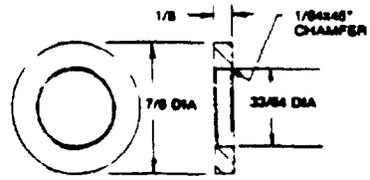


FIGURE 7. Ring, gland - M24231/6-013. (14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Full or partial threads shall not extend more than 0.083 inch beyond the 9/16-inch thread length.
3. Refer to requirement 4 of MIL-C-24231/5 for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
4. See requirement 7 of MIL-C-24231/5.

TABLE I. Parts list.

Item 1/ no.	Description 2/	3/ Quantity for M24231/6- 001	Material/specification	Remarks
01	Connector assembly, single cable, symbol no. 517.4	1	-----	See figure 1
02	Gasket, O-ring	1	MS28775-215	Lubricate with silicone compound MIL-S-8660, see figure 1
03	Gasket, O-ring	1	MS28775-329	See item 02
04	Gasket, O-ring	1	MS28775-327	See item 02
05	Gasket, O-ring	1	MS28775-115	See item 02
06	Single cable connector body	1	Ni-Cu-Al, QQ-N-286	See figure 2
07	Cap, pressure-proof	1	M24231/12-011	See figure 1
08	Ring, retaining	1	M24231/5-073	See figure 1
09	Ring, retaining	1	M24231/5-076	See figure 1
10	Insert, assembly, molded	1	See items 21, 22, and 23	See figure 4
11	Packing, class A, durometer, 55 ± 5	1	Rubber, ZZ-R-768	See figure 5
12	Washer, body	1	M24231/5-075	See figure 1
13	Nut, body	1	M24231/5-074	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	3/ Quantity for M24231/6- 001	Material/specification	Remarks
14	Ring, gland	1	Ni-Al-BRZ, QQ-C-465	See figure 7
15	Washer, spring lock	1	MS35338-124	See figure 1
16	Nut, gland	1	Ni-Al-BRZ, QQ-C-465	See figure 6
17	Pin, guide	1	M24231/5-071	See figure 1
18	Plate, identification, 1/16 thick	1	CRES or Al, MIL-P-15024	See figure 3
19	Insert	1	M24231/5-077	See figure 1
20	Screw	2	M24231/5-083	See figure 1
21	Pin, contact	3	MIL-C-24231	See figure 4
22	Cable, DSS-3, 15 ft	1	MIL-C-915/8	See figures 1 and 4
23	Epoxy resin, molded	As required	Cast epoxy resin compound 4/	See figure 4

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. The flange outside diameter is intended to coincide with commonly available 2-3/4 inch bar stock. The dimension may vary after machine clean-up.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.