INCH-POUND
MIL-DTL-24231/6F(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/6E(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, TYPE III, FOR DSS-3 CABLE

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figures 1 through 7.

2. Full or partial threads shall not extend more than 0.083 inch beyond the 9/16-inch thread length.

3. Refer to MIL-DTL-24231/5 for alternate method of manufacturing connector body and installing guide pin M24231/5-071.

4. For welding of the pin, item 17, see MIL-DTL-24231/5.

5. All dimensions are in inches.

6. Tolerances shall be as follows, or as stated:

   a. Decimals – ±0.005 inch.

   b. Fractions – ±1/64 inch.


   c. Angular dimensions – ±½ degree.

   d. Tolerances for rubber packing should follow the guidance provided in table XLI (RMA Drawing Designation A2 Precision) of MIL-HDBK-149.

7. The flange outside diameter is intended to coincide with commonly available 2¾-inch bar stock. The dimension may vary after machine clean-up.

8. The gland nut shall be tightened until the packing tightens against the wires and cables. This can be determined by moving the wires and cables gently back and forth until the wire and cable is seized by the packing. The gland nut shall be turned approximately one-fourth of a turn more to hold wires and cables in place. Do not overtighten the gland nut or attempt to tighten down metal to metal, as this can damage the wires and cables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

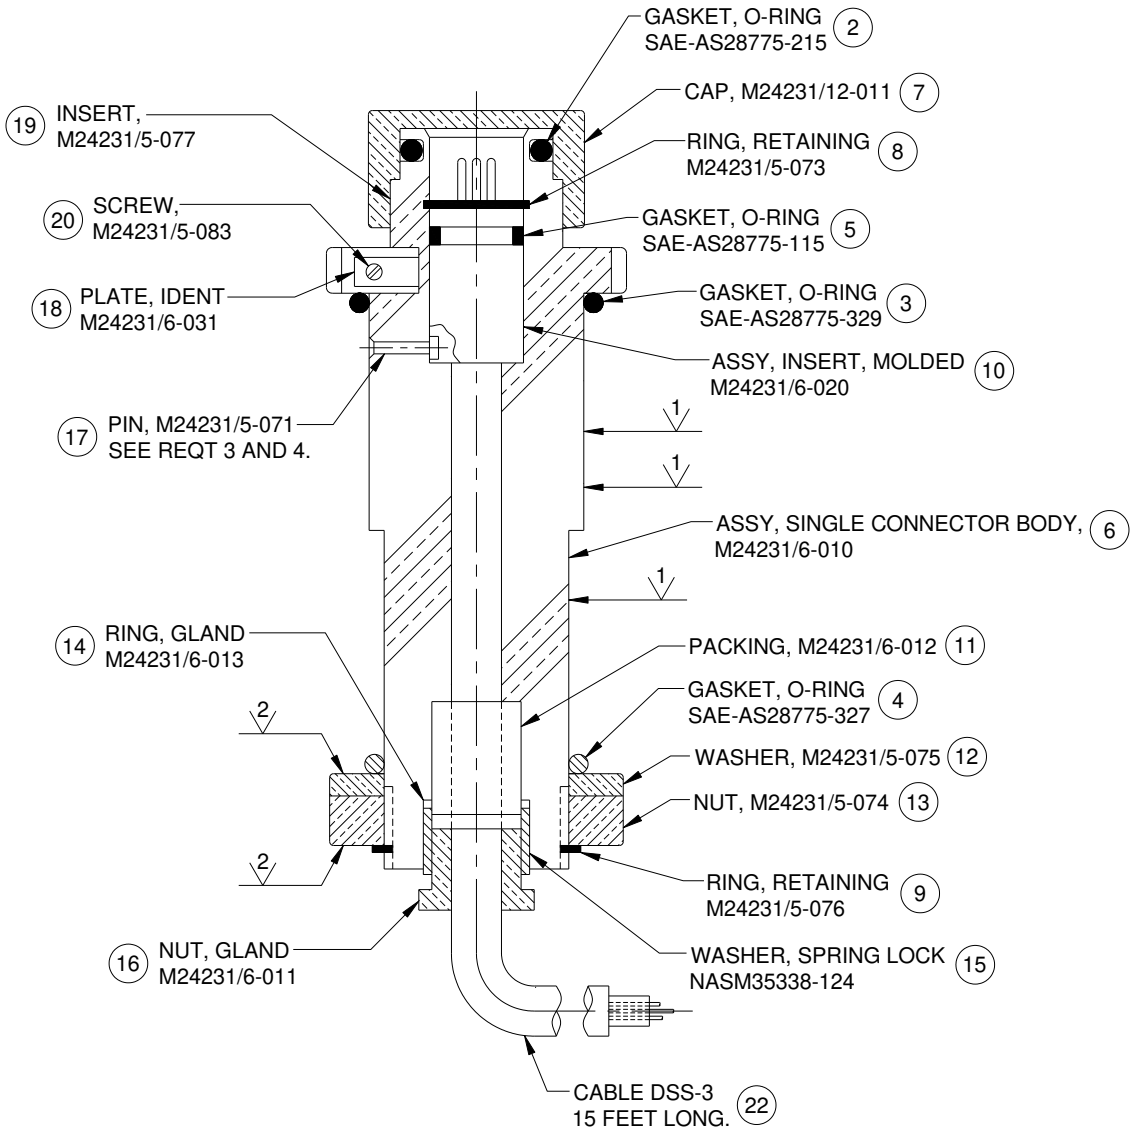

1/ HARDNESS READING TO BE TAKEN AT THESE POINTS.

2/ HARDNESS READING TO BE TAKEN AT THIS FACE AT 120-DEGREE INTERVALS.

FIGURE 1. Connector, single cable M24231/6-001, symbol no. 517.4. (1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

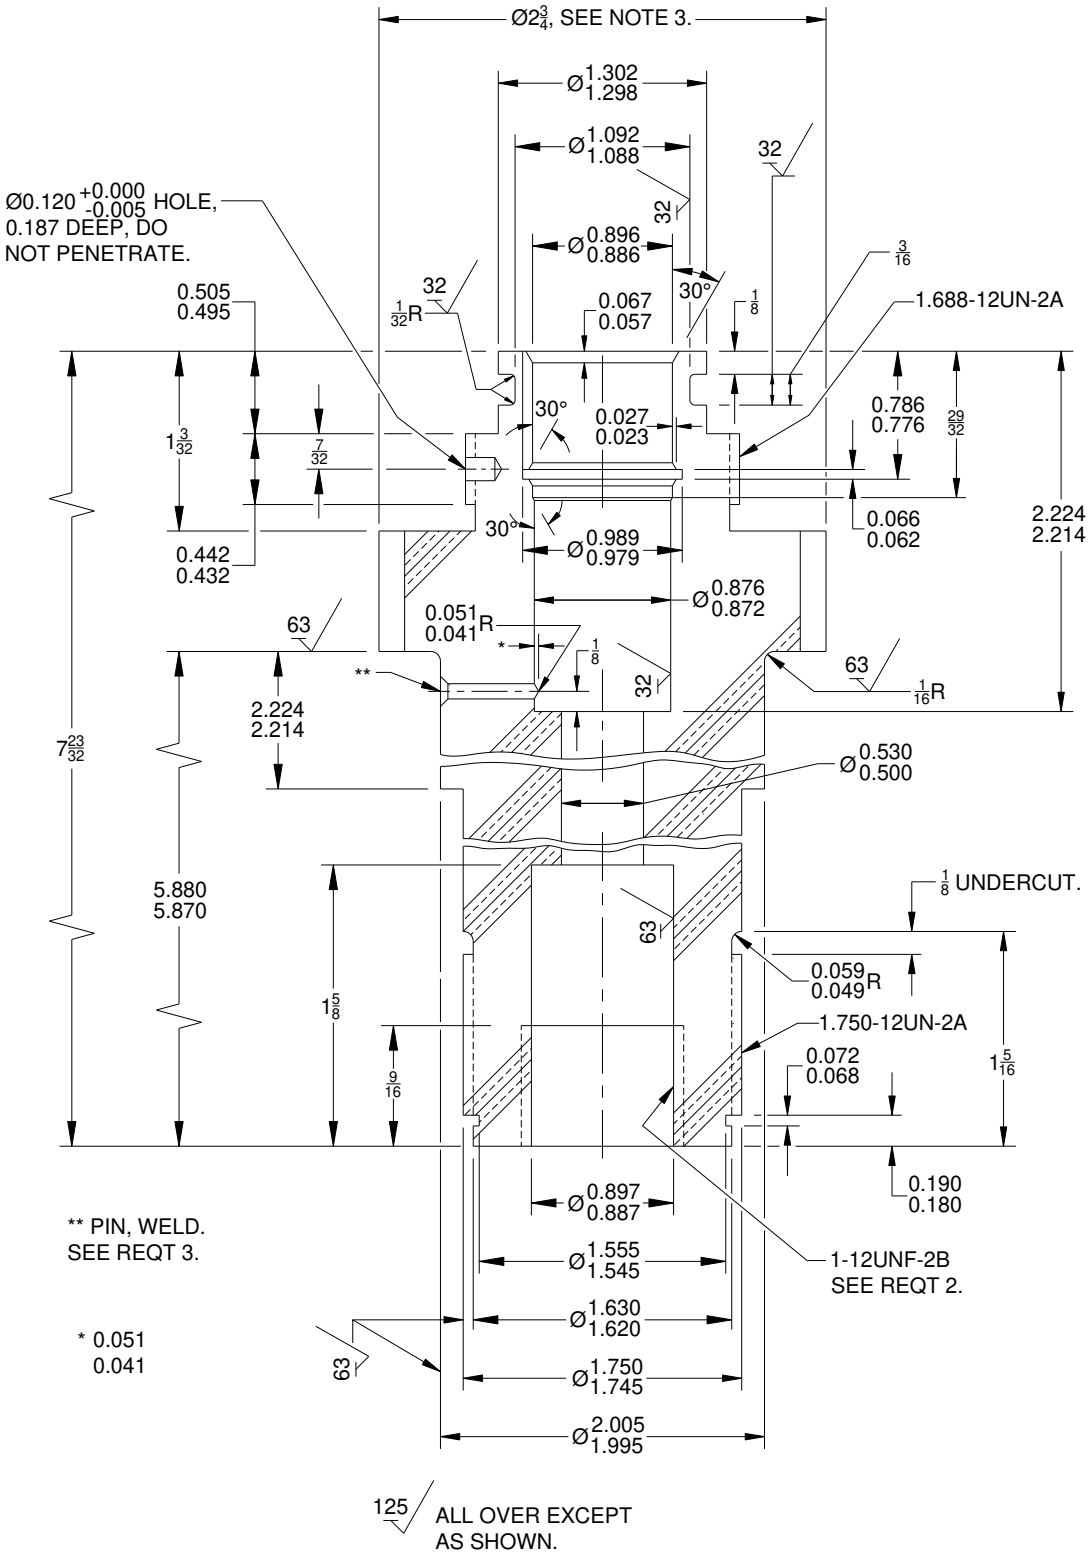


FIGURE 2. Assembly, single cable connector body – M24231/6-010. (6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

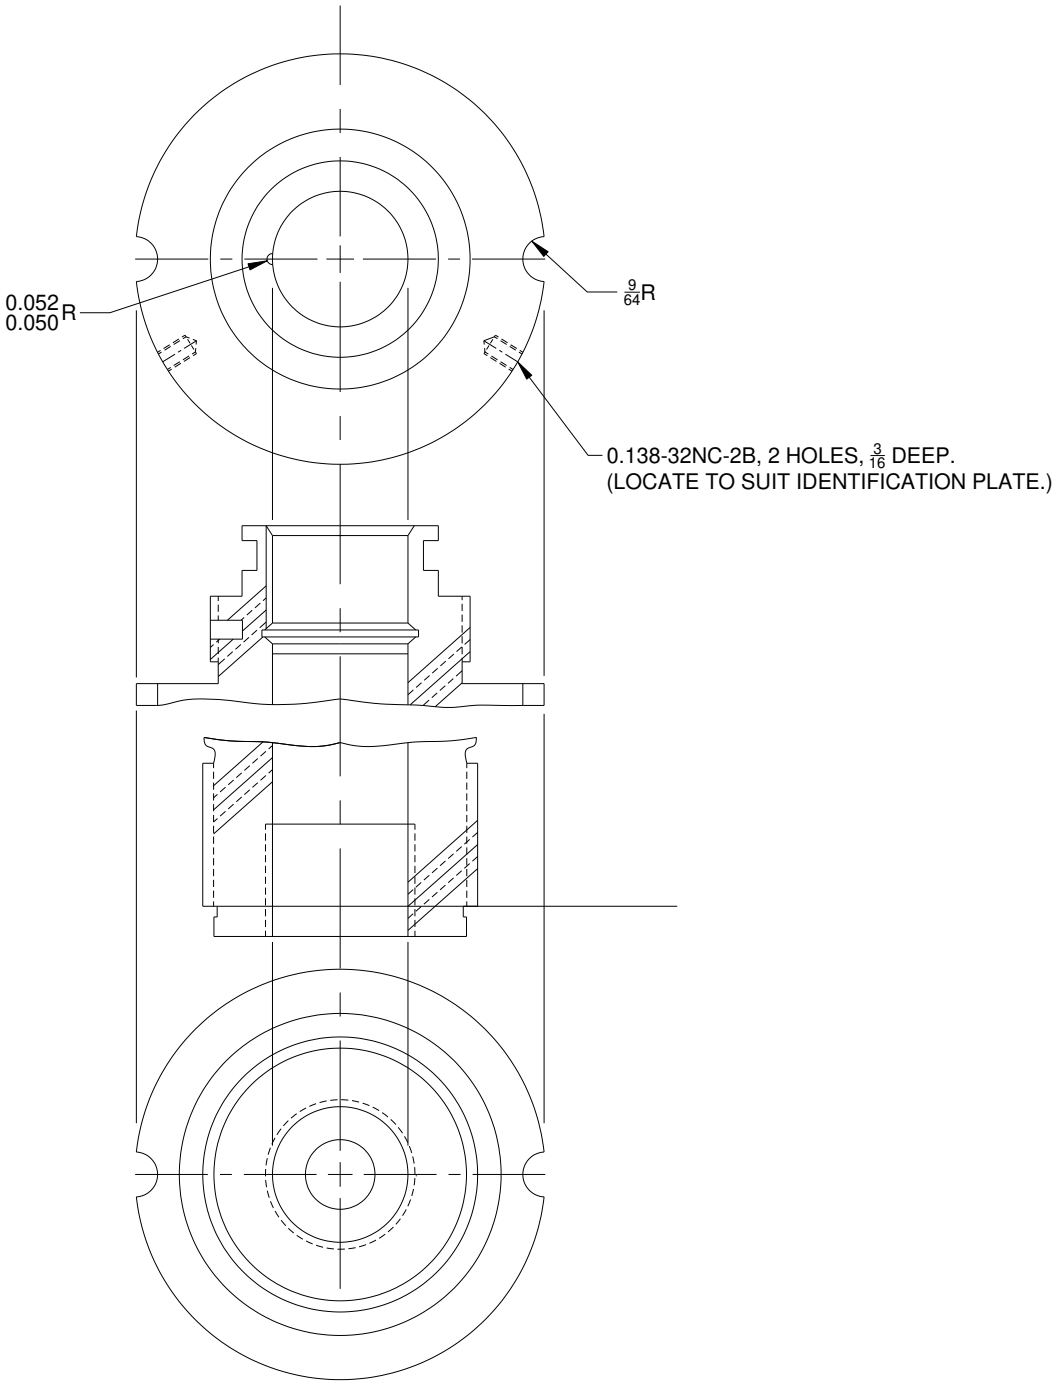


FIGURE 2. Assembly, single cable connector body – M24231/6-010 – Continued. (6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

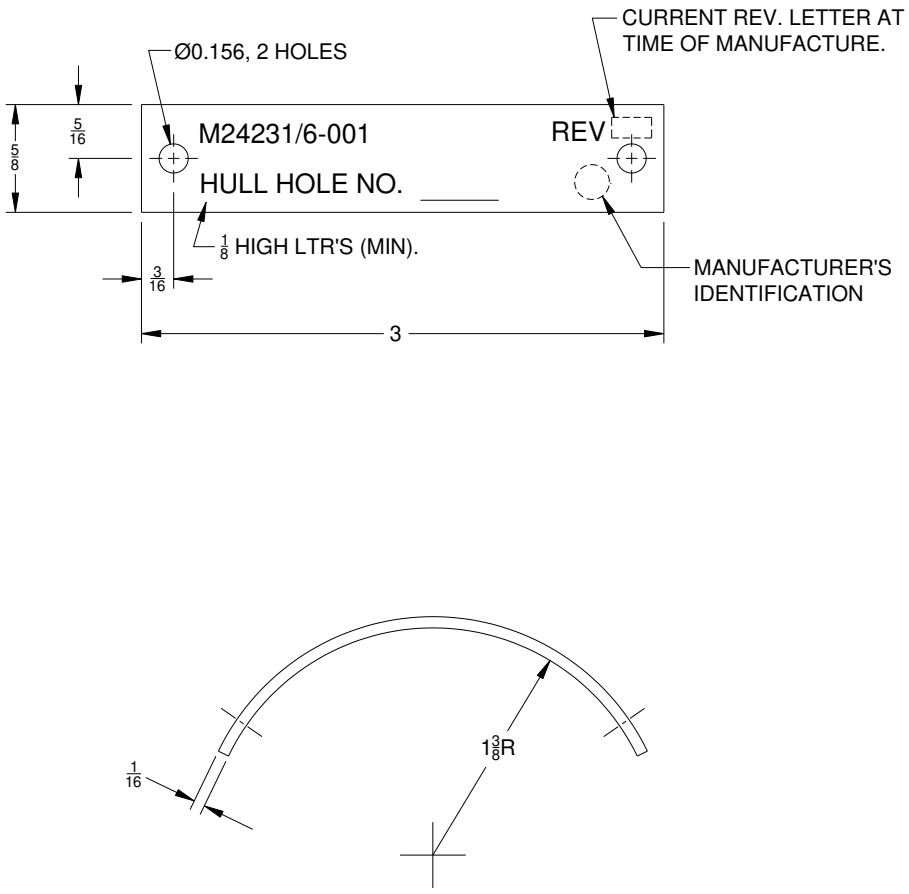


FIGURE 3. Plate, identification - M24231/6-031. (18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

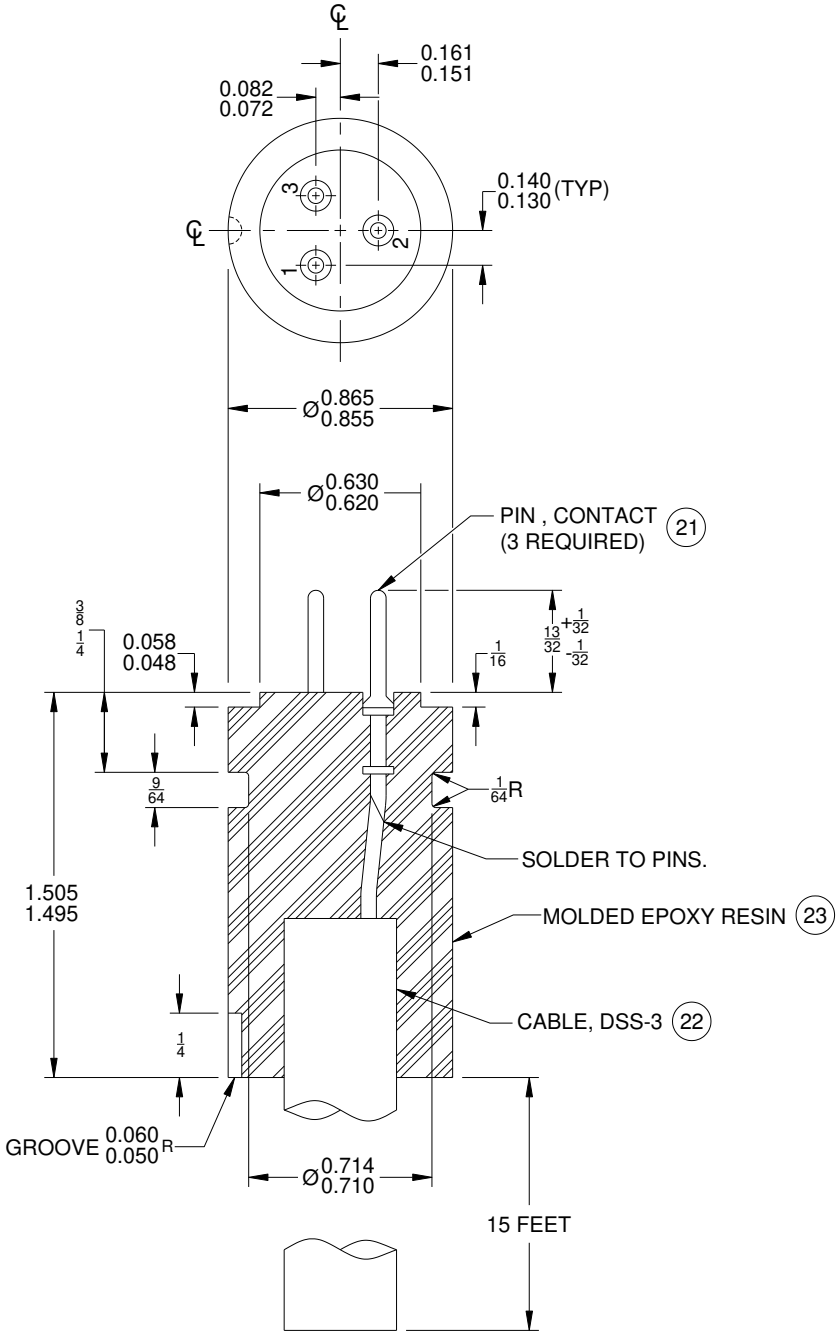


FIGURE 4. Assembly, insert, molded - M24231/6-020. (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

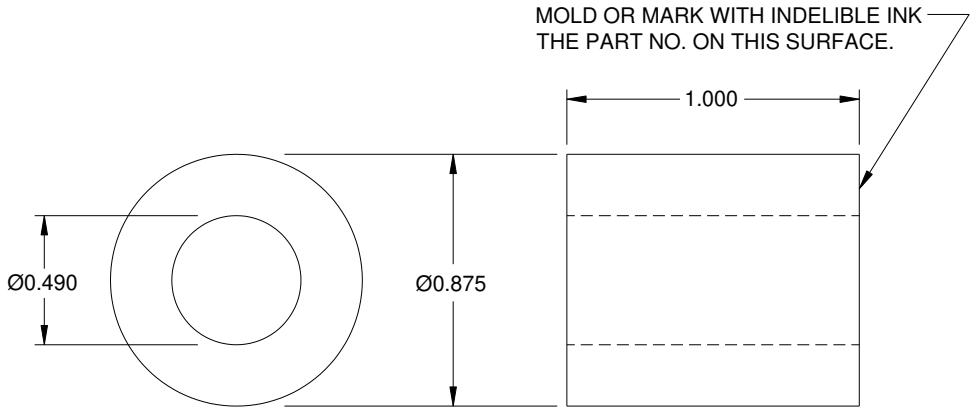


FIGURE 5. Packing - M24231/6-012. (11)

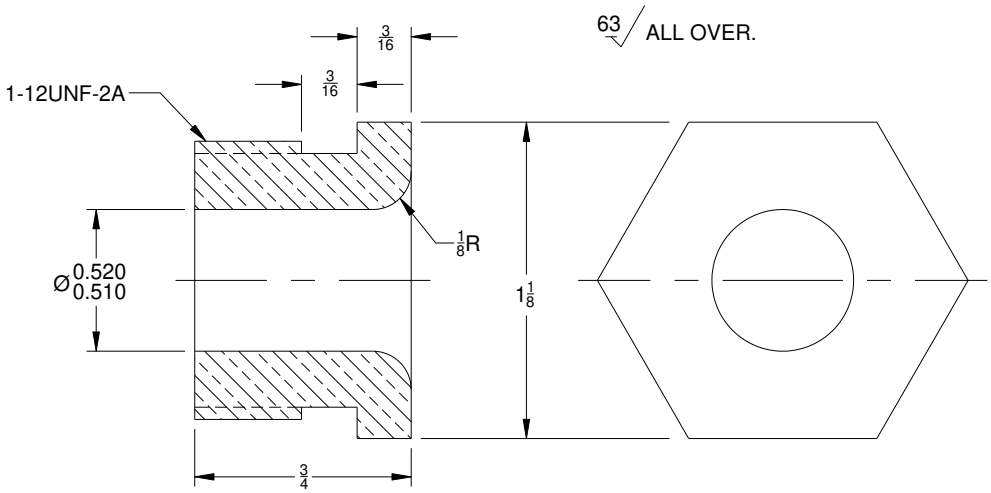


FIGURE 6. Nut, gland – M24231/6-011. (16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

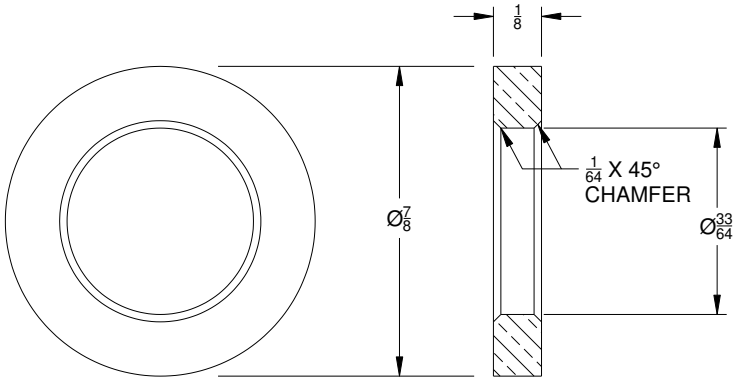


FIGURE 7. Ring, gland – M24231/6-013. (14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. 1/	Description 2/	Quantity for M24231/6- 3/	Material/specification	Remarks
		001		
1	Connector assembly, single cable, symbol no. 517.4	1	-----	See figure 1.
2	Gasket, O-ring	1	SAE-AS28775-215	Lubricate with silicone compound SAE-AS8660, see figure 1.
3	Gasket, O-ring	1	SAE-AS28775-329	See item 2.
4	Gasket, O-ring	1	SAE-AS28775-327	See item 2.
5	Gasket, O-ring	1	SAE-AS28775-115	See item 2.
6	Single cable connector body	1	Ni-Cu-Al, QQ-N-286	See figure 2 and continuation of figure 2.
7	Cap, pressure-proof	1	MIL-DTL-24231/12-011	See figure 1.
8	Ring, retaining	1	M24231/5-073	See figure 1.
9	Ring, retaining	1	M24231/5-076	See figure 1.
10	Insert assembly, molded	1	See items 21, 22, and 23	See figure 4.
11	Packing, Class A, durometer, 55±5	1	Rubber, ZZ-R-768	See figure 5.
12	Washer, body	1	M24231/5-075	See figure 1.
13	Nut, body	1	M24231/5-074	See figure 1.
14	Ring, gland	1	Ni-Al-BRZ, ASTM B150/B150M	See figure 7.
15	Washer, spring lock	1	NASM35338-124	See figure 1.
16	Nut, gland	1	Ni-Al-BRZ, ASTM B150/B150M	See figure 6.
17	Pin, guide	1	M24231/5-071	See figure 1.
18	Plate, identification, 1/16 thick	1	CRES or Al, MIL-DTL-15024	See figure 3.
19	Insert	1	M24231/5-077	See figure 1.
20	Screw	2	M24231/5-083	See figure 1.
21	Pin, contact	3	MIL-DTL-24231	See figure 4.
22	Cable, DSS-3, 15’	1	MIL-DTL-915/8	See figure 1 and figure 4.
23	Epoxy resin, molded	As required	Cast epoxy resin compound 4/	See figure 4.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ Arco Set 200, M.M. Reif and Co., Ivyland, PA, or PR610-TCF (Chockfast Orange), ITW Philadelphia Resins Corp., Montgomeryville, PA, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-055)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:12Z
Check the source to verify that this is the current version before use.