
MILITARY SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, SEVEN-CONDUCTOR

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for us by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the single cable connector described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

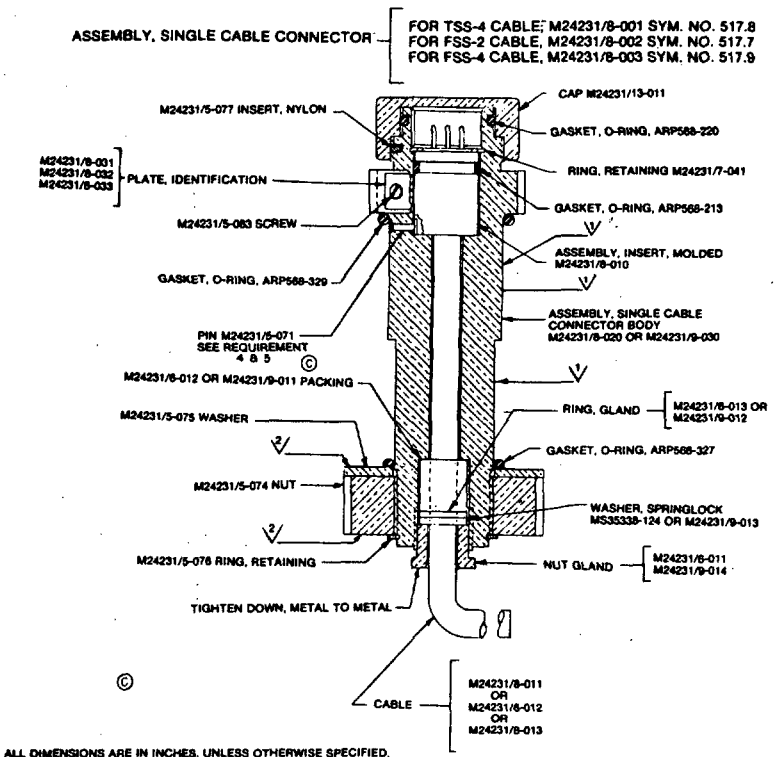


V BRINELL HARDNESS READING TO BE TAKEN AT THESE POINTS.
V² BRINELL HARDNESS READING TO BE TAKEN AT THIS FACE AT 120 DEGREE INTERVALS.

SH9875

C Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

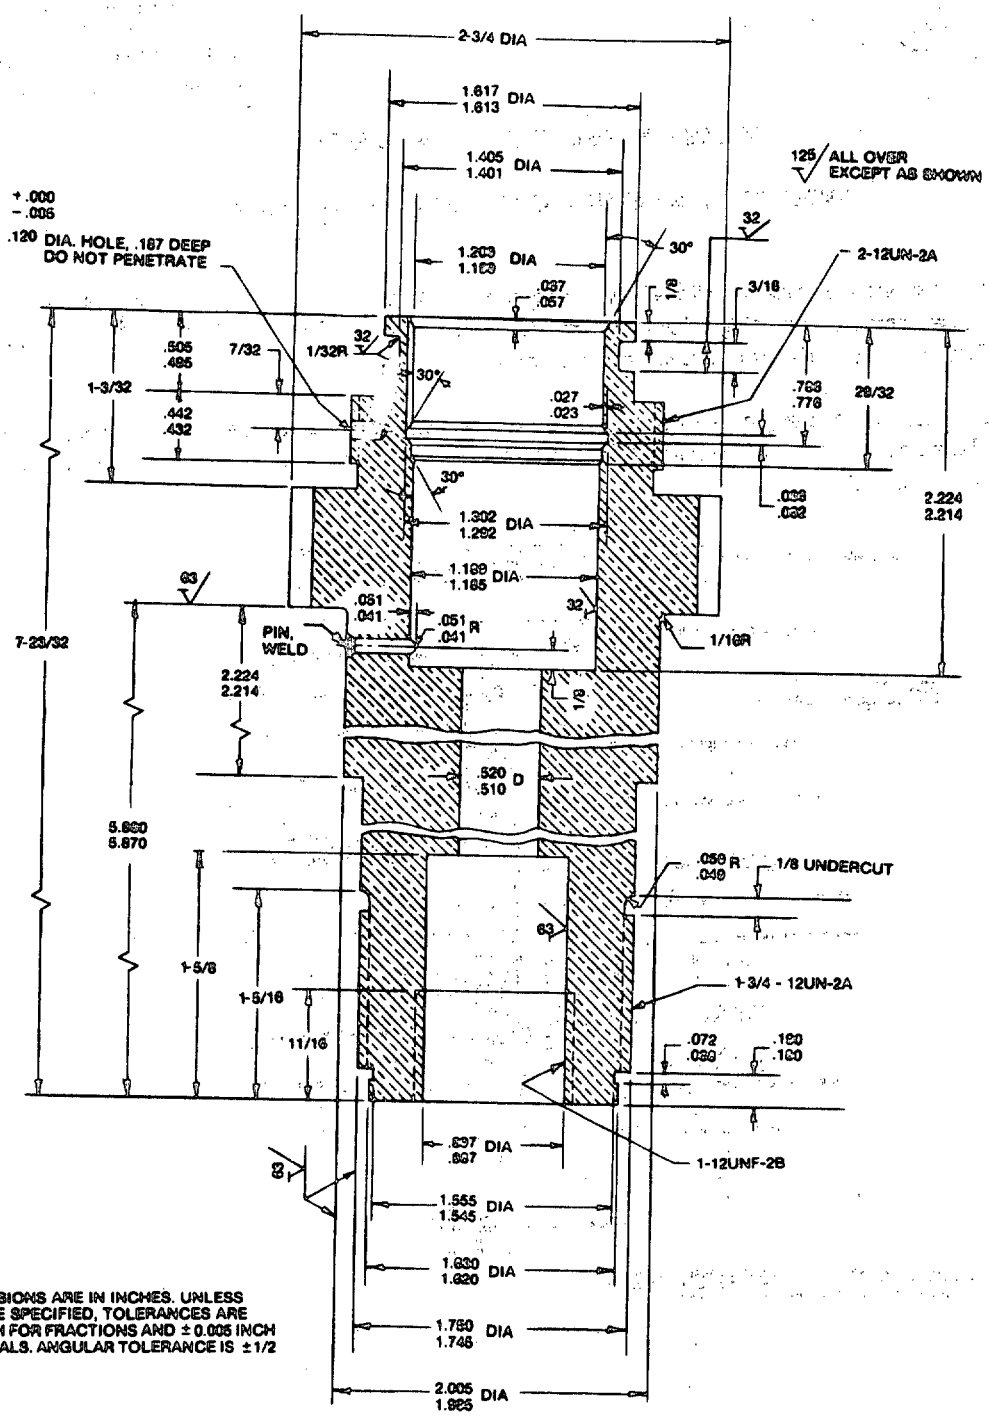


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

ASSEMBLY, SINGLE CABLE CONNECTOR BODY
M24231/8-020 (FOR M24231/8-001 AND M24231/8-002 ONLY)

SHC375-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

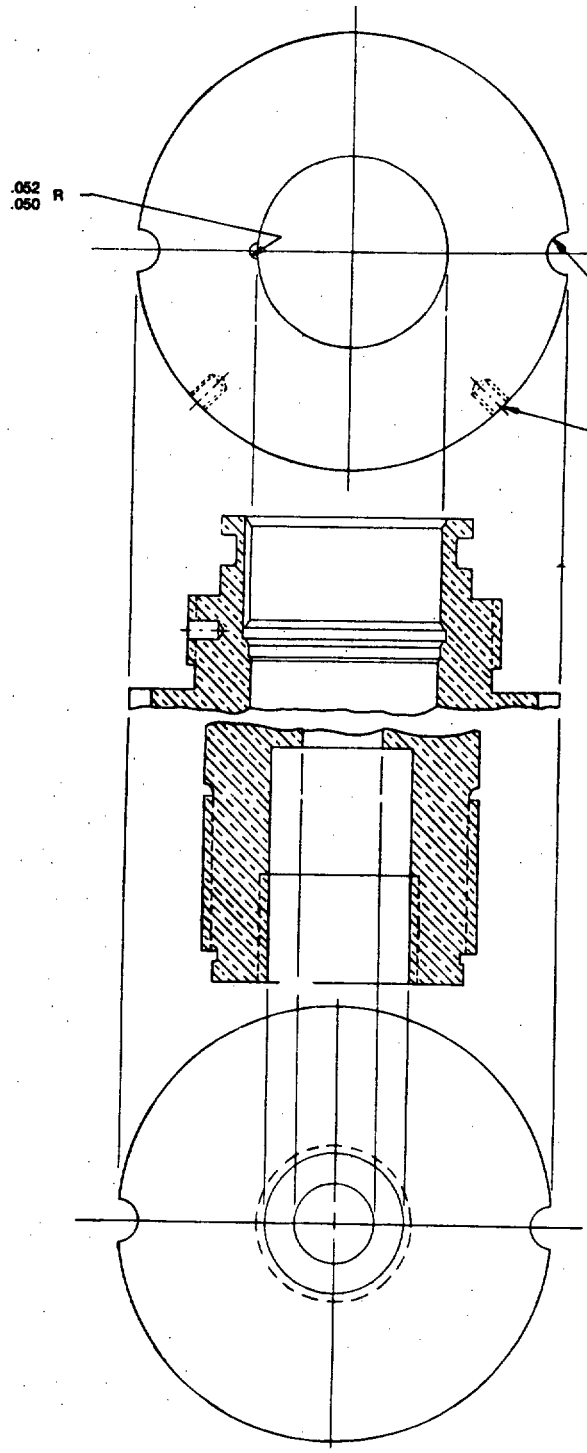


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.

SH9675-2

ASSEMBLY, SINGLE CABLE CONNECTOR BODY
M24231/8-020


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

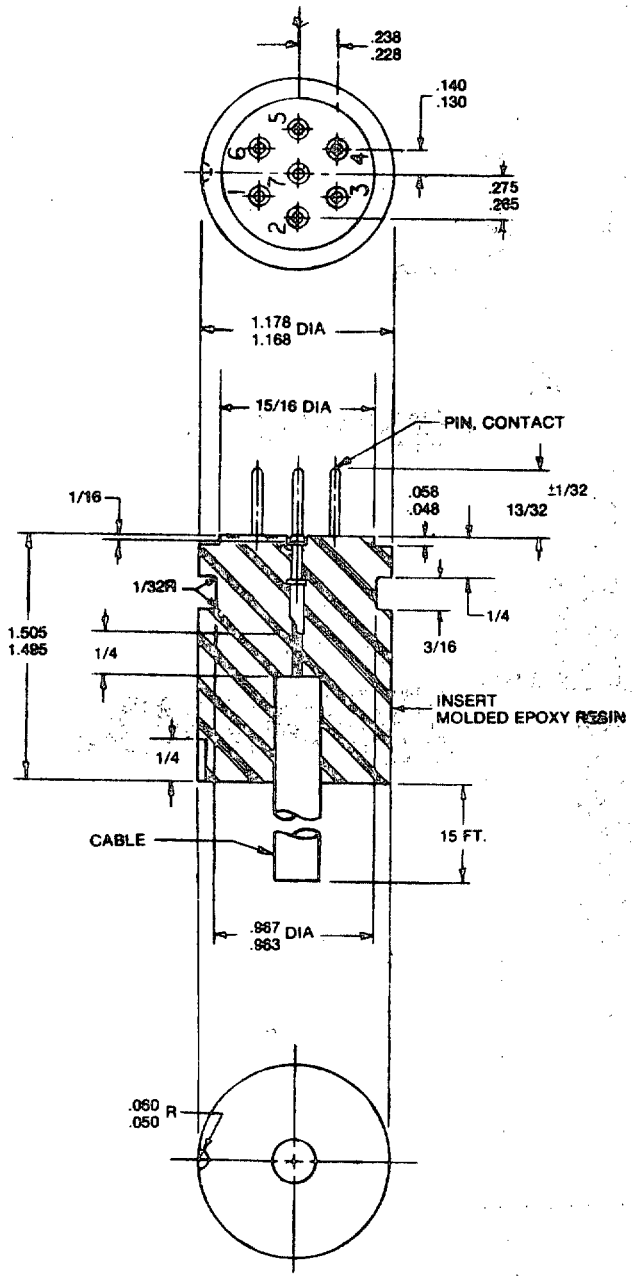


ASSEMBLY, INSERT, MOLDED M24231/8-010

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

SH9975-3

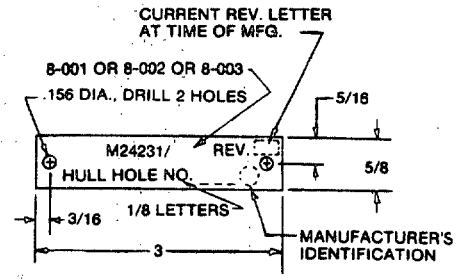



PLATE, IDENTIFICATION
M24231/8-031 (FOR M24231/8-001)
M24231/8-032 (FOR M24231/8-002)
M24231/8-033 (FOR M24231/8-003)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

Table I - Parts list.

Part No.	Name	Quantity for		
		M24231/8-001	M24231/8-002	M24231/8-003
M24231/8-001	Assembly, Single Cable Connector (TSS-4)	1		
M24231/8-002	Assembly, Single Cable Connector (FSS-2)		1	
M24231/8-003	Assembly, Single Cable Connector (FSS-4)			1
M24231/8-010	Assembly, Insert Molded (7-Cond.)	1	1	1
M24231/8-011	Cable, TSS-4, 15 Ft.	1		
M24231/8-012	Cable, FSS-2, 15 Ft.		1	
M24231/8-013	Cable, FSS-4, 15 Ft.			1
M24231/8-020	Assembly, Single Cable Connector Body	1	1	
M24231/8-031	Plate, Identification	1		
M24231/8-032	Plate, Identification		1	
M24231/8-033	Plate, Identification			1
ARP568-213	O-Ring Gasket	1	1	1
ARP568-220	O-Ring Gasket	1	1	1
ARP568-327	O-Ring Gasket	1	1	1
ARP568-329	O-Ring Gasket	1	1	1
M24231/5-071	Pin	1	1	1
M24231/5-074	Nut	1	1	1
M24231/5-075	Washer	1	1	1
M24231/5-076	Ring, Retaining	1	1	1
M24231/5-077	Insert, Nylon	1	1	1
M24231/5-083	Screw	2	2	2
M24231/6-011	Nut, Gland	1	1	
M24231/6-012	Packing	1	1	
M24231/6-013	Ring, Gland	1	1	
M24231/7-041	Ring, Retaining	1	1	1
M24231/9-011	Packing			1
M24231/9-012	Ring, Gland			1
M24231/9-013	Washer, Spring Lock			1
M24231/9-014	Nut, Gland			1
M24231/9-030	Assembly, Single Cable Connector Body			1
M24231/13-011	Cap	1	1	1
MS35338-124	Washer, Springlock	1	1	

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. For parts information, see table I.
3. Types TSS-4 and FSS cables shall be in accordance with MIL-C-915/8.
4. (C) Refer to requirement 9 of MIL-C-24231/5C for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
5. (C) See requirement 12 of MIL-C-24231/5.

Preparing activity:
Navy - SH
(Project 5935-N842-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 82 MAR PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.