MIL-C-24231/8D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/8C(SHIPS)
30 August 1976
(See note 4)

MILITARY SPECIFICATION SHEET


CONNECTOR, SINGLE CABLE, TYPE III, SEVEN-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the single cable connector described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

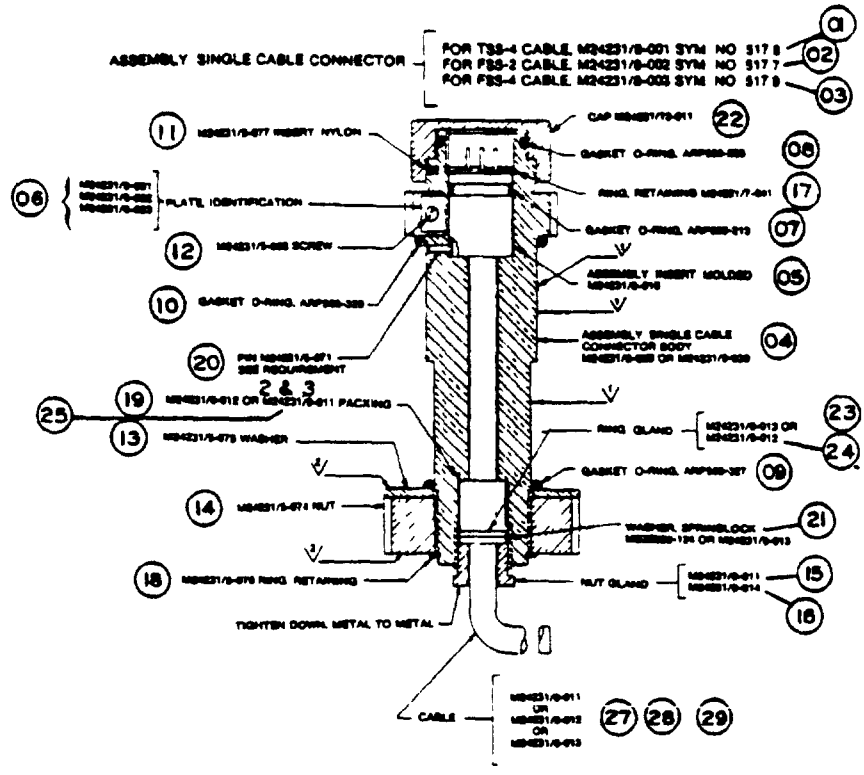


1/ Hardness reading to be taken at these points.

2/ Hardness reading to be taken at this face at 120-degree intervals.

SH 9675

FIGURE 1. Connector, single cable, seven-conductor.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

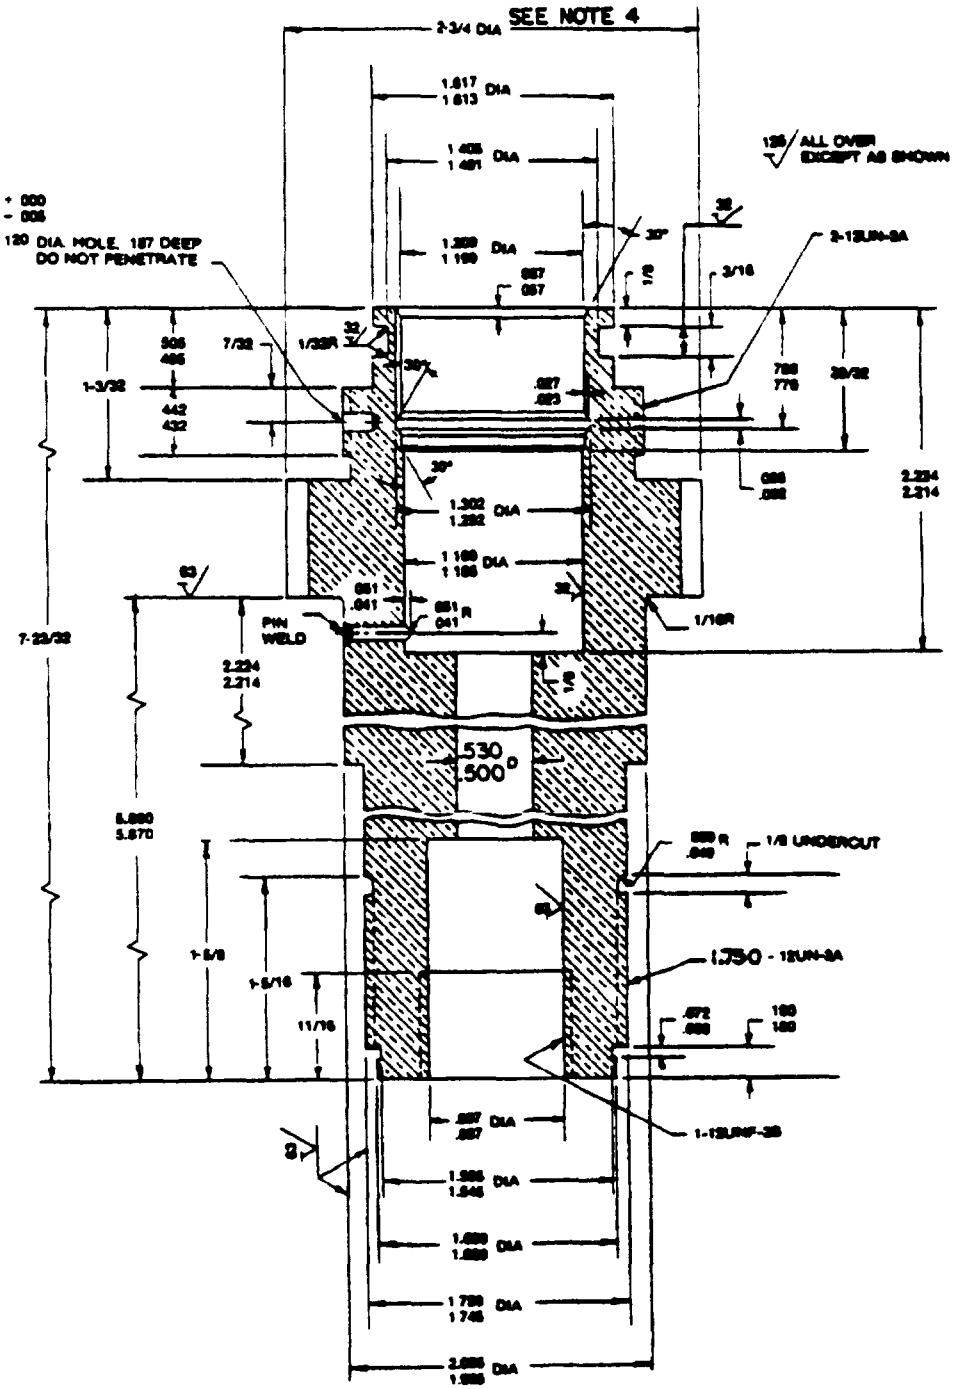

SH 9675-1

FIGURE 2. Assembly, single cable connector body - M24231/8-020 (for M24231/8-001 and M24231/8-002 only).


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

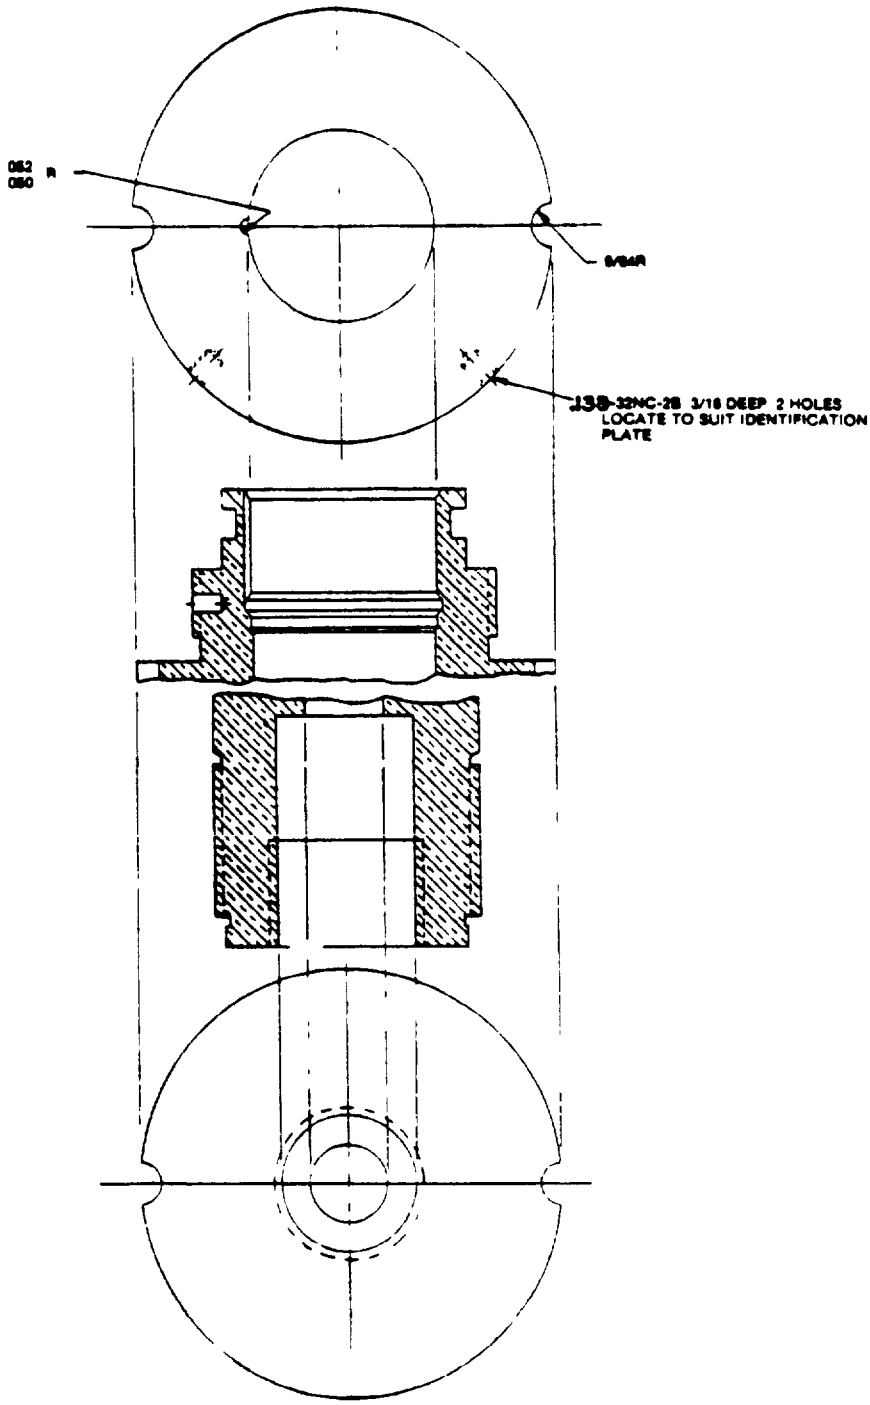

SH 9675-2

FIGURE 2. Assembly, single cable connector body - M24231/8-020. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

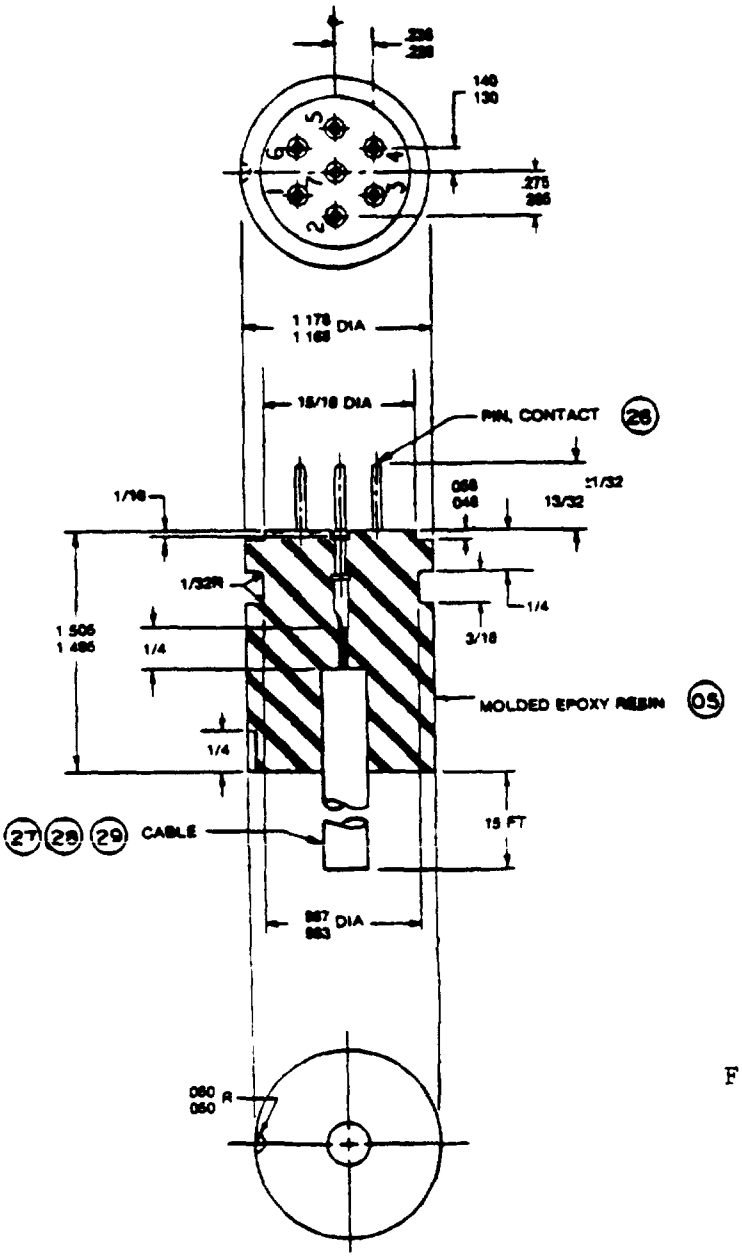

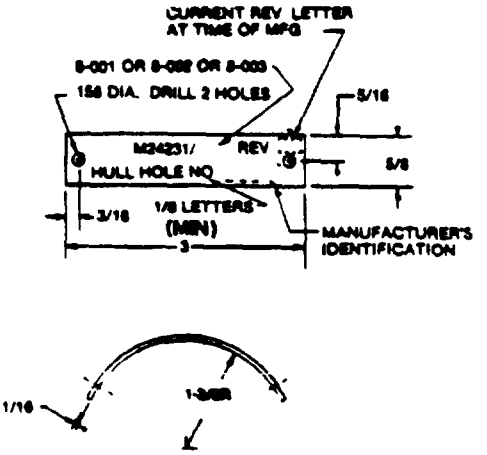


FIGURE 4. Plate identification - M24231/8-031 (for M24231/8-001) M24231/8-032 (for M24231/8-002) M24231/8-033 (for M24231/8-003). 06

FIGURE 3. Assembly, insert, molded - M24231/8-010. 30

SH 9675-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Refer to requirement 4 of MIL-C-24231/5D for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
3. See requirement 7 of MIL-C-24231/5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/8- 3/			Material/specification	Remarks
		001	002	003		
01	Connector assembly, single cable, symbol no. 517.8	1			-----	See figure 1
02	Connector assembly, single cable, symbol no. 517.7		1		-----	See figure 1
03	Connector assembly, single cable, symbol no. 517.9			1	-----	See figure 1
04	Connector body, single cable	1	1		Ni-Cu-Al, QQ-N-286	See figure 2 and requirement 2
05	Epoxy resin, molded	As required			Cast epoxy resin compound 4/	See figure 3
06	Plate, identification	1	1	1	CRES or Al, MIL-P-15024	See figure 4
07	O-ring gasket	1	1	1	MS28775-213	Lubricate with silicone compound, MIL-S-8660, see figure 1
08	O-ring gasket	1	1	1	MS28775-220	See item 07
09	O-ring gasket	1	1	1	MS28775-327	See item 07
10	O-ring gasket	1	1	1	MS28775-329	See item 07
11	Insert	1	1	1	M24231/5-077	See figure 1
12	Screw	2	2	2	M24231/5-083	See figure 1
13	Washer, body	1	1	1	M24231/5-075	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/8- 3/ 001	002	003	Material/specification	Remarks
14	Nut, body	1	1	1	M24231/5-074	See figure 1
15	Nut, gland	1	1		M24231/6-011	See figure 1
16	Nut, gland			1	M24231/9-014	See figure 1
17	Ring, retaining	1	1	1	M24231/7-041	See figure 1
18	Ring, retaining	1	1	1	M24231/5-076	See figure 1
19	Packing	1	1		M24231/6-012	See figure 1
20	Pin, guide	1	1	1	M24231/5-071	See requirement 2
21	Washer, spring-lock	1	1	1	MS35338-124	See figure 1
22	Cap, pressure-proof	1	1	1	M24231/13-011	See figure 1
23	Ring, gland	1	1		M24231/6-013	See figure 1
24	Ring, gland			1	M24231/9-012	See figure 1
25	Packing			1	M24231/9-011	See figure 1
26	Pin, contact	7	7	7	MIL-C-24231	See figure 3
27	Cable, TSS-4, 15 ft	1			MIL-C-915/8	See figure 1
28	Cable, FSS-2, 15 ft		1		MIL-C-915/8	See figures 1 and 3
29	Cable, FSS-4, 15 ft			1	MIL-C-915/8	See figures 1 and 3
30	Insert assembly, molded	1	1	1	See items 05, 26, and 27, 28 or 29	See figure 3

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Ouantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. The flange outside diameter is intended to coincide with commonly available 2-3/4 inch bar stock. The dimension may vary after machine clean-up.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.