
MILITARY SPECIFICATION SHEET

# CONNECTOR, SINGLE CABLE, TYPE III, SEVEN- AND NINE-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the single cable connector described herein shall consist of this specification and the latest issue of MIL-C-24231.

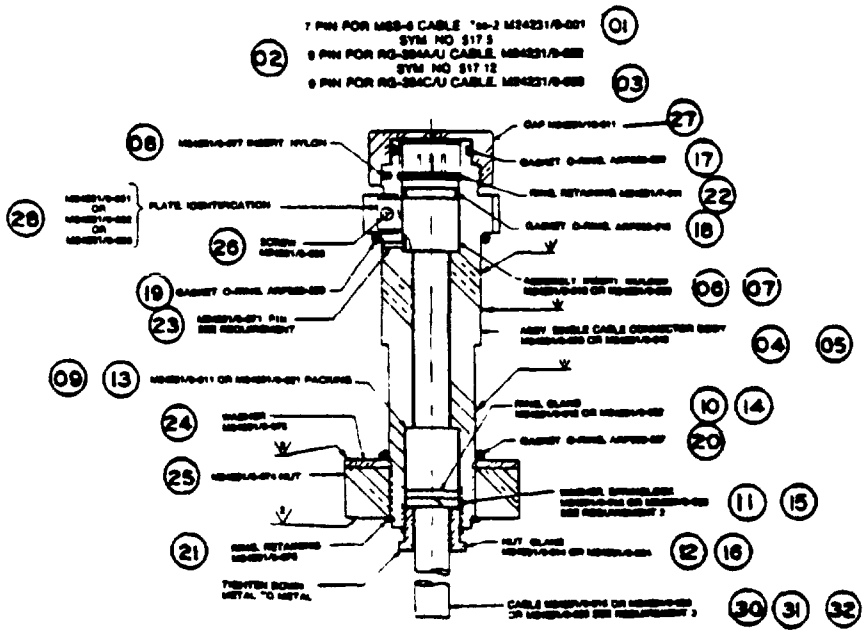


1/ Hardness reading to be taken at these points.

2/ Hardness reading to be taken at this face at 120-degree intervals.

SH 9676


FIGURE 1. Connector, single cable, seven- and nine-conductor.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

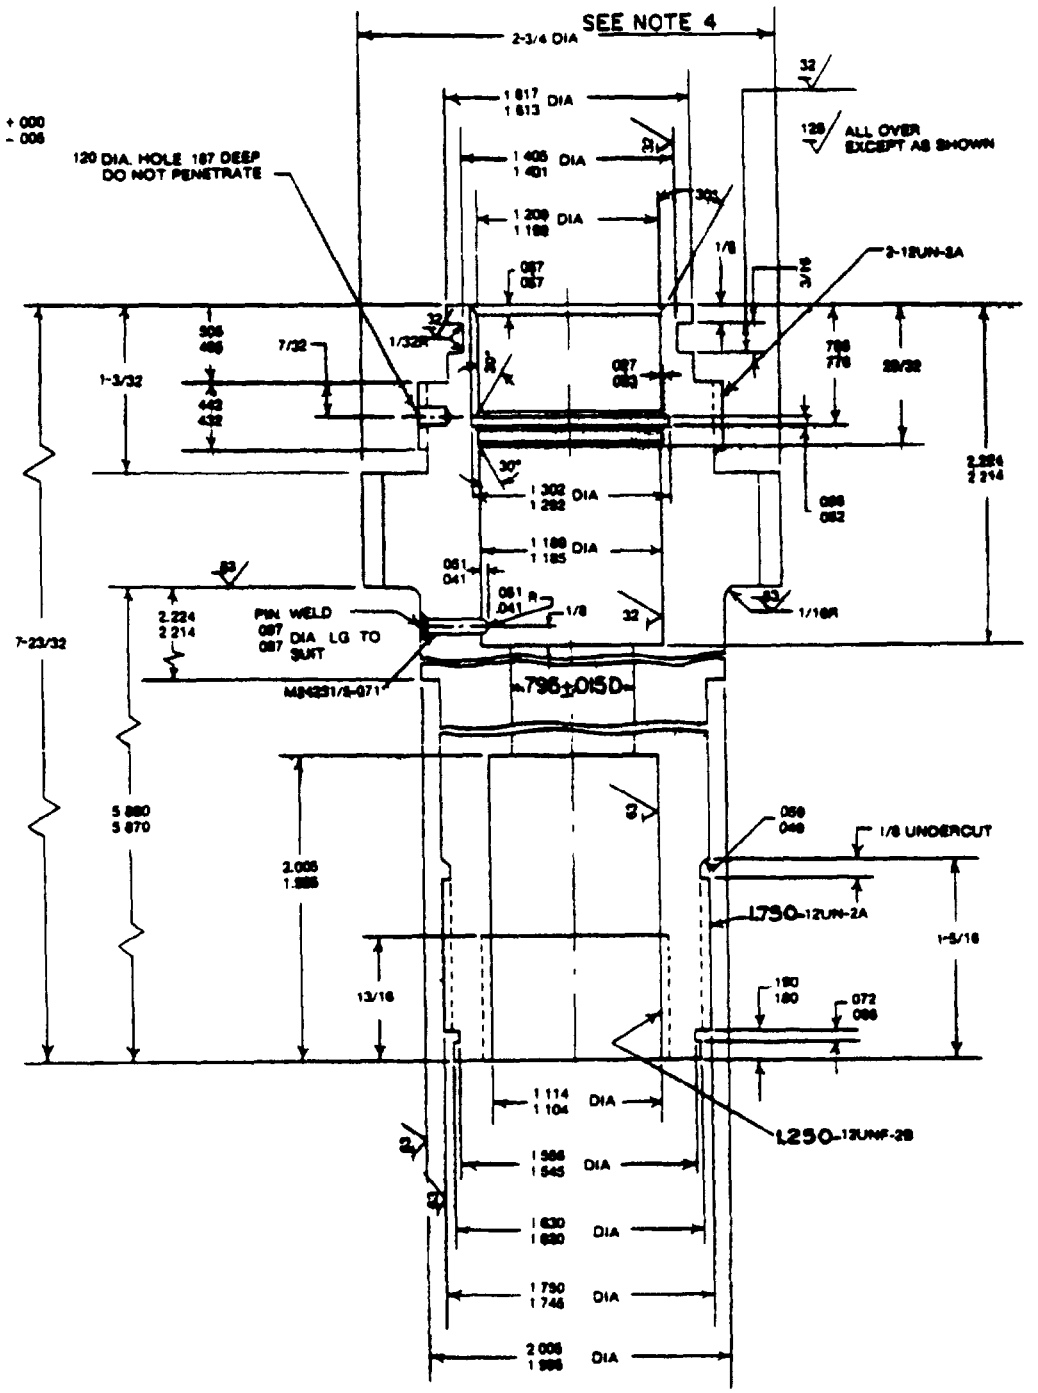



SH 9676-1

FIGURE 2. Assembly, single cable connector body - M24231/9-030, (04) (05) M24231/9-040.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

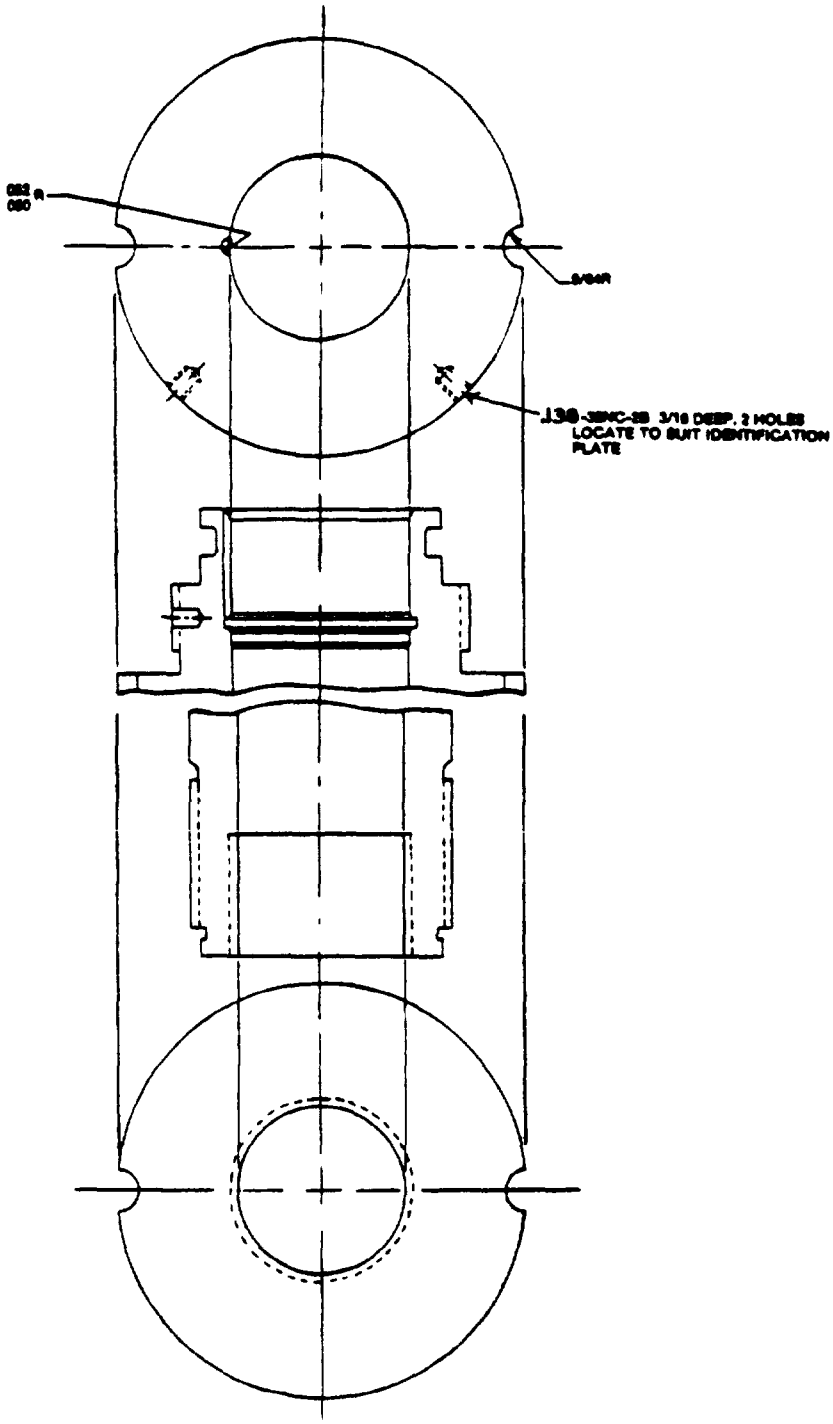


SH 9676-2

FIGURE 2. Assembly, single cable connector body - M24231/9-030, M24231/9-040. - Continued (04) (05)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

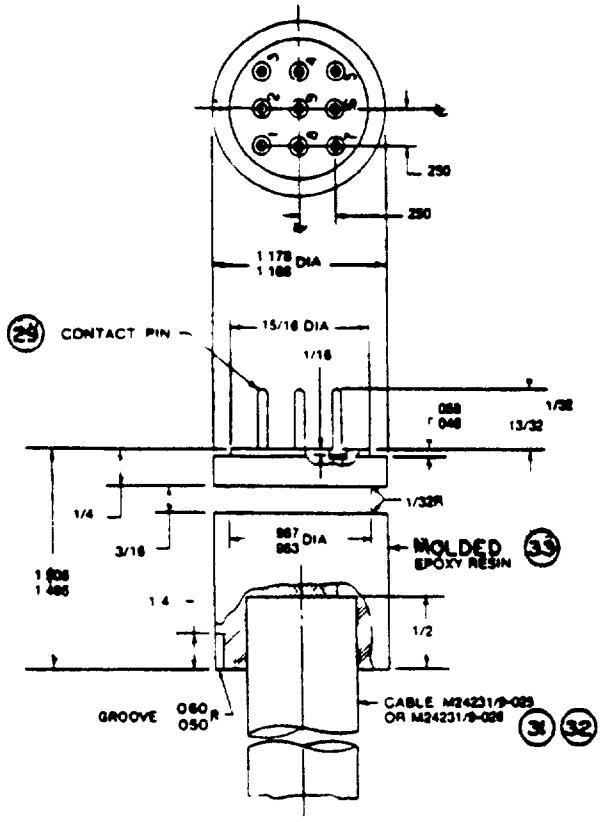



FIGURE 3. Assembly, insert, molded - M24231/9-020. (07)

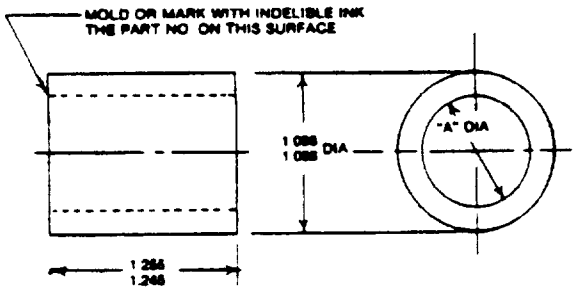



FIGURE 4. Packing. M24231/9-011 (A= 600) (09); M24231/9-021 (A= 782) (13)

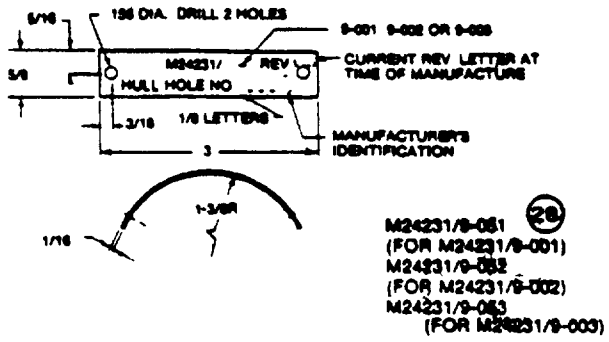



FIGURE 5. Plate, identification.

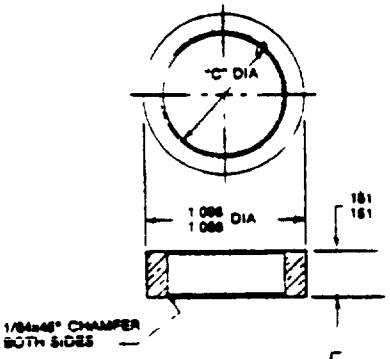



FIGURE 6. Ring, gland. M24231/9-012 (C= 671) (10); M24231/9-022 (C= 796) (14)


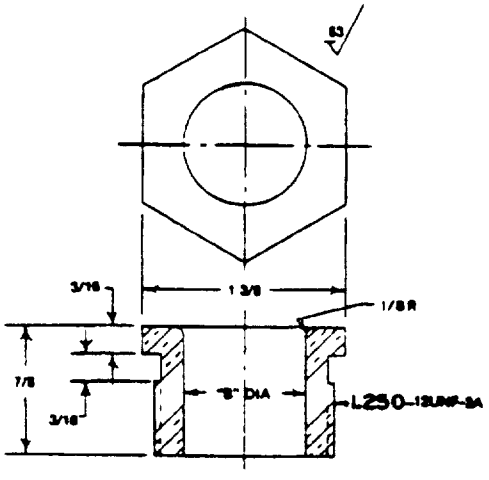



FIGURE 7. Nut, gland. M24231/9-014 (B= 671) (12); M24231/9-024 (B= 796) (17)





Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

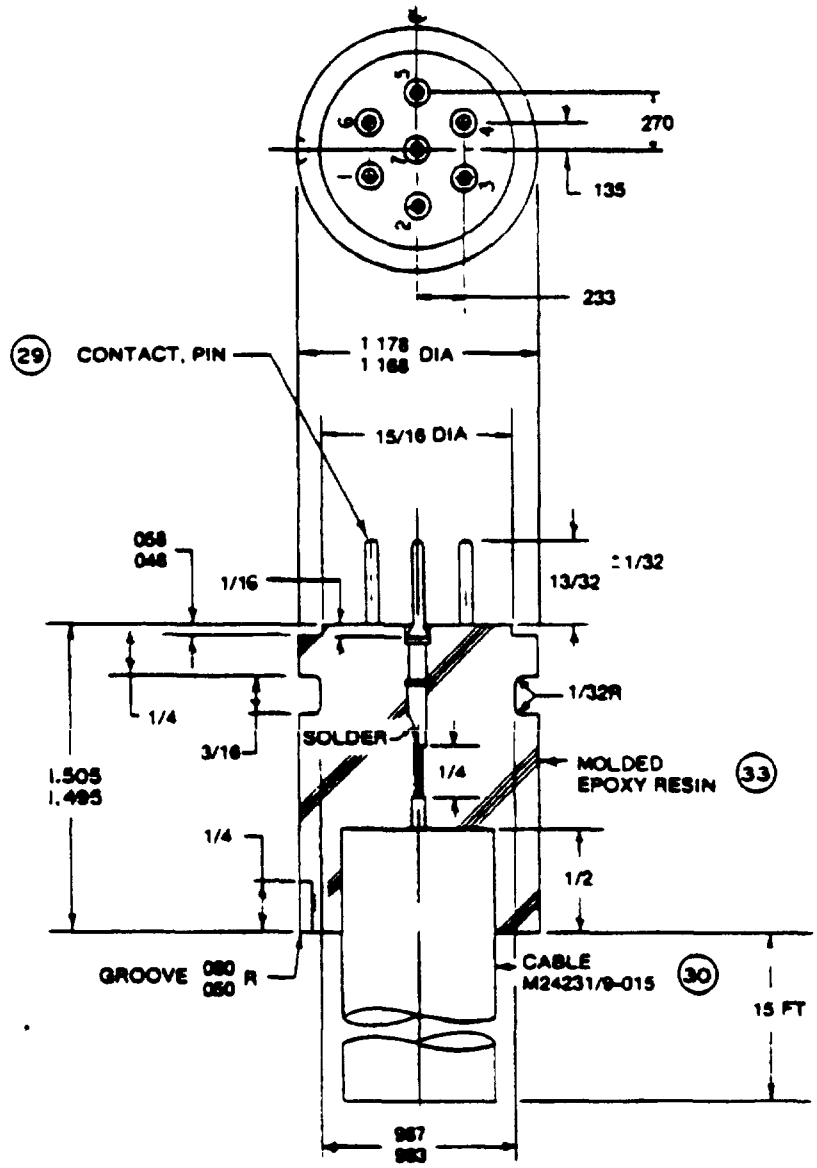


SH 9676-4

FIGURE 8. Assembly, insert, molded (7-conductor) - M24231/9-010. (06)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. The spring lockwasher, part number M24231/9-023, shall be in accordance with MS35338-126 except that the inside diameter (id) shall be 0.796.
3. Refer to requirement 4 of MIL-C-24231/5 for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
4. See requirement 7 of MIL-C-24231/5.



Source: https://assist.dla.mil Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

| Item 1/ no. | Description 2/ | Quantity for M24231/9- 3/ 001 | 002 | 003 | Material/specification | Remarks |
|---|---|---|---|---|---|---|
| 01 | Connector assembly, single cable, symbol no. 517.5 | 1 | | | ----- | 7-Pin for cable MSS-6 or 7SS-2, see figure 1 |
| 02 | Connector assembly, single cable, symbol no. 517.12 | | 1 | | ----- | 9-Pin for cable RG-264 A/U, see figure 1 |
| 03 | Connector assembly, single cable | | | 1 | ----- | 9-Pin for cable RG-264 C/U, see figure 1 |
| 04 | Connector body, single cable | 1 | | | Ni-Cu-Al, QQ-N-286 | See figure 2 and requirement 3 |
| 05 | Connector body, single cable | | 1 | 1 | Ni-Cu-Al, QQ-N-286 | See figure 2 and requirement 3 |
| 06 | Insert assembly, molded 7-conductor | 1 | | | See items 29, 30, and 33 | See figure 8 |
| 07 | Insert assembly, molded 9-conductor | | 1 | 1 | See items 29, 31, or 32 and 33 | See figure 3 |
| 08 | Insert | 1 | 1 | 1 | M24231/5-077 | See figure 1 |
| 09 | Packing, M24231/9-011 class A, durometer 55 ± 5 | 1 | | | Rubber, ZZ-R-768 | See figure 4 |
| 10 | Ring, gland, M24231/9-012 | 1 | | | Ni-Al-BRZ, QQ-C-465 | See figure 6 |
| 11 | Washer, lock, M24231/9-013 | 1 | | | MS35338-126 | See figure 1 |
| 12 | Nut, gland M24231/9-014 | 1 | | | Ni-Al-BRZ, QQ-C-465 | See figure 7 |
| 13 | Packing, class A durometer 55 ± 5 M24231/9-021 | | 1 | 1 | Rubber, ZZ-R-768 | See figure 4 |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

| Item 1/ no. | Description 2/ | Quantity for M24231/9- 3/ 001 | 002 | 003 | Material/specification | Remarks |
|---|---|---|---|---|---|---|
| 14 | Ring, gland, M24231/9-022 | | 1 | 1 | Ni-Al-BRZ, QQ-C-465 | See figure 6 |
| 15 | Washer, spring-lock M24231/9-023 | | 1 | 1 | MS35338-126 | See figure 1 and requirement 2 |
| 16 | Nut, gland, M24231/9-024 | | 1 | 1 | Ni-Al-BRZ, QQ-C-465 | See figure 7 |
| 17 | O-ring, gasket | 1 | 1 | 1 | MS28775-220 | Lubricate with silicone compound, MIL-S-8660, see figure 1 |
| 18 | O-ring, gasket | 1 | 1 | 1 | MS28775-213 | See item 17 |
| 19 | O-ring, gasket | 1 | 1 | 1 | MS28775-329 | See item 17 |
| 20 | O-ring, gasket | 1 | 1 | 1 | MS28775-327 | See item 17 |
| 21 | Ring, retaining | 1 | 1 | 1 | M24231/5-076 | See figure 1 |
| 22 | Ring, retaining | 1 | 1 | 1 | M24231/7-041 | See figure 1 |
| 23 | Pin, guide | 1 | 1 | 1 | M24231/5-071 | See requirement 3 |
| 24 | Washer | 1 | 1 | 1 | M24231/5-075 | See figure 1 |
| 25 | Nut | 1 | 1 | 1 | M24231/5-074 | See figure 1 |
| 26 | Screw | 1 | 1 | 1 | M24231/5-083 | See figure 1 |
| 27 | Cap, pressure-proof | 1 | 1 | 1 | M24231/13-011 | See figure 1 |
| 28 | Plate, identification | 1 | 1 | 1 | Corrosion-resistant steel or aluminum, MIL-P-15024 | See figure 5 |

See footnotes at end of table.





Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

| Item 1/ no. | Description 2/ | Quantity for M24231/9- 3/ 001 | 002 | 003 | Material/specification | Remarks |
|---|---|---|---|---|---|---|
| 29 | Pin, contact | 7 | 9 | 9 | MIL-C-24231 | See figure 8 |
| 30 | Cable, 7SS-2 | 15 ft | | | MIL-C-915/8 | See figure 1 |
| 31 | Cable, RG-264 A/U | As required | | | MIL-C-23020 | See figures 1 and 3 |
| 32 | Cable, RG-264 C/U | As required | | | MIL-C-23020/4 | See figures 1 and 3 |
| 33 | Epoxy resin, molded | As required | | | Cast epoxy resin compound 4/ | See figures 3 and 8 |

1/ Item numbers are the same as encircled numbers shown or figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.





Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. The flange outside diameter is intended to coincide with commonly available 2-3/4 inch bar stock. The dimension may vary after machine clean-up.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-09)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:13Z
Check the source to verify that this is the current version before use.