MILITARY SPECIFICATION SHEET

PRESSURE PROOF RECEPTACLE CAP ASSEMBLY

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle cap assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

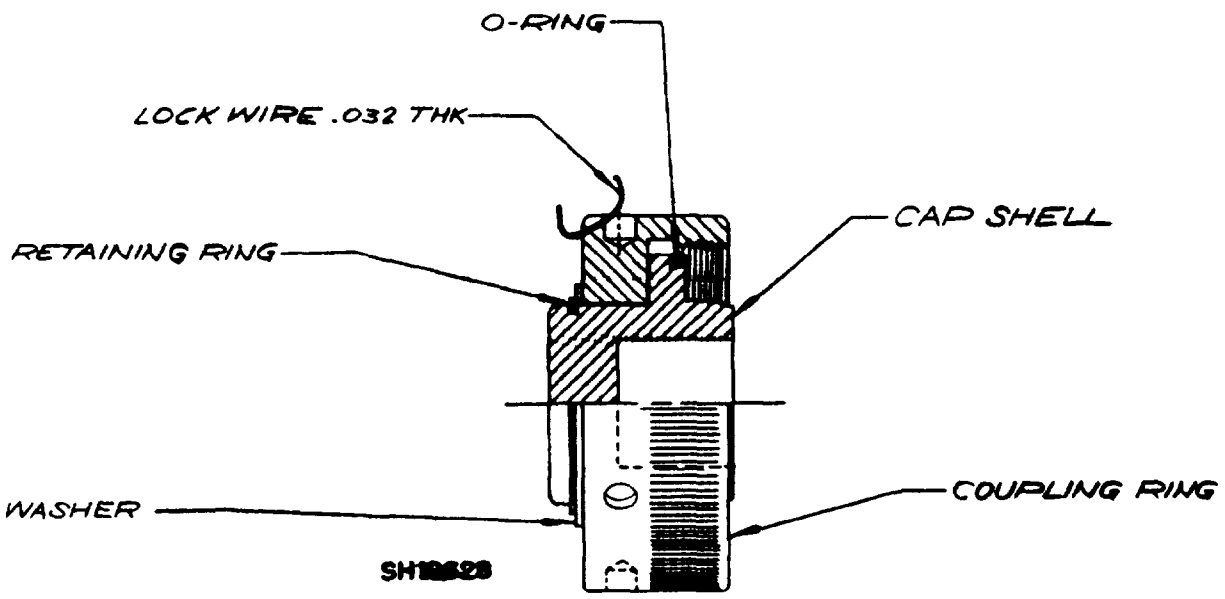


FIGURE 1. Configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

TABLE I. Part number for pressure proof receptacle cap assembly.

CAP ASS'Y NUMBER	CONNECTOR TYPE	CAP SHELL	COUPLING RING	WASHER	O-RING AS-568A	RETAINING RING
M24217/10-001	3 NO. 16	M24217/ 10-025	M24217/ 7-039	M24217/ 10-043	-117	RS-87-SK
M24217/10-002	5 NO. 16	M24217/ 10-026	M24217/ 7-040	M24217/ 10-044	-122	RS-106-SK
M24217/10-003	9 NO 16	M24217/ 10-027	M24217/ 7-041	M24217/ 10-045	-126	RS-118-SK
M24217/10-004	14 NO. 16	M24217/ 10-028	M24217/ 7-042	M24217/ 10-046	-132	RS-150-SK
M24217/10-005	24 NO. 16	M24217/ 10-029	M24217/ 7-043	M24217/ 10-047	-138	RS-187-S
M24217/10-006	37 NO. 16	M24217/ 10-030	M24217/ 7-044	M24217/ 10-048	-145	RS-231-S
M24217/10-007	48 NO. 16	M24217/ 10-031	M24217/ 7-045	M24217/ 10-049	-151	RS-231-S
M24217/10-008	3 NO. 12	M24217/ 10-027	M24217/ 7-046	M24217/ 10-045	-126	RS-118-SK
M24217/10-009	5 NO. 12 AND 3 NO. 8	M24217/ 10-028	M24217/ 7-047	M24217/ 10-046	-132	RS-150-SK
M24217/10-010	9 NO. 12, 3 NO. 4 & 3 #12 WITH 3 #8	M24217/ 10-029	M24217/ 7-048	M24217/ 10-047	-138	RS-187-S
M24217/10-011	2 NO. 0 WITH 4 NO. 12	M24217/ 10-030	M24217/ 7-049	M24217/ 10-048	-145	RS-231-S
M24217/10-012	8 NO. 16	M24217/ 10-032	M24217/ 8-086	M24217/ 10-044	-119	RS-106-S
M24217/10-013	3 NO. 0	M24217/ 10-033	M24217/ 8-087	M24217/ 10-050	-147	RS-250-S

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

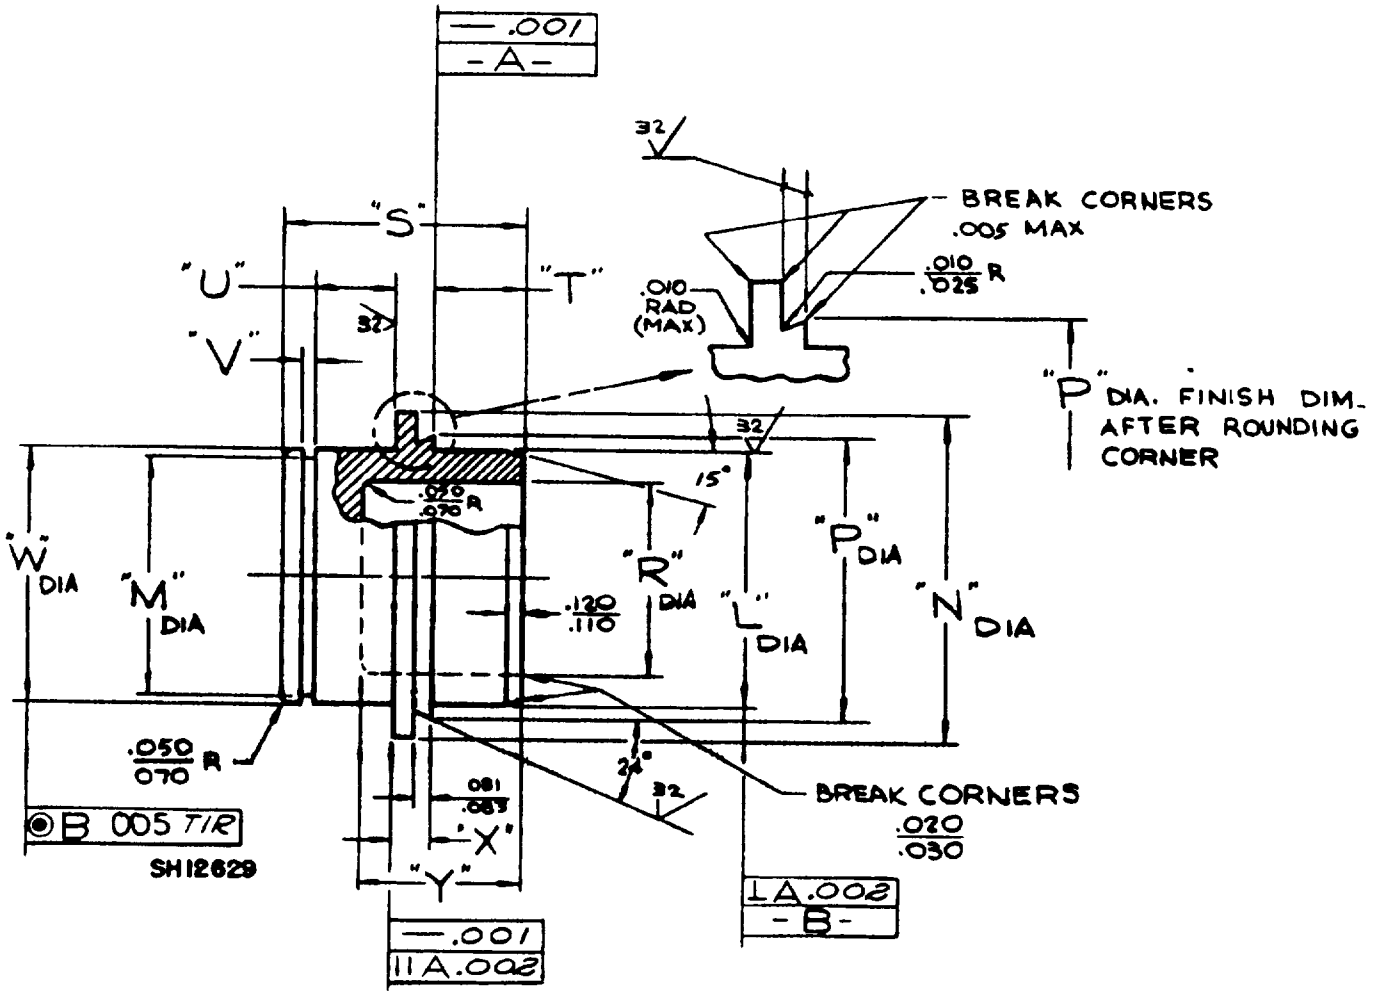



FIGURE 2. Cap shell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions for cap shell.

CAP SHELL PART NUMBER	CONNECTOR TYPE	L	M	N	P	R	S	T	U	V	W	X	Y
M24217/10-025	3 NO 16	.623 .621	.835 .841	1.130 1.120	.850 .840	—	1.120 1.140	.370 .380	.365 .370	.036 .039	.875 .873	.207 .187	—
M24217/10-026	5 NO 16	.812 .810	1.017 1.023	1.380 1.370	1.163 1.153	—	1.120 1.140	.370 .380	.365 .370	.042 .045	1.062 1.060	.207 .187	—
M24217/10-027	9 NO 16 & 3 NO 12	1.058 1.056	1.136 1.144	1.630 1.620	1.413 1.403	.490 .510	1.210 1.230	.370 .380	.395 .400	.048 .052	1.187 1.185	.269 .249	.678 .698
M24217/10 028	14 NO 16, 5 NO 12 & 3 NO 8	1.308 1.306	1.444 1.452	2.005 1.995	1.792 1.782	.740 .760	1.210 1.230	.370 .380	.395 .400	.048 .052	1.502 1.500	.269 .249	.678 .698
M24217/10-029	24 NO 16, 3 NO 4, 9 NO 12, & 3 NO 8 WITH 3 NO 12	1.690 1.688	1.803 1.813	2.380 2.370	2.167 2.157	1.115 1.135	1.210 1.230	.370 .380	.395 .400	.056 .060	1.875 1.873	.269 .249	.678 .698
M24217/10-030	37 NO 16 & 2 NO 0 WITH 4 NO 12	2.065 2.063	2.228 2.240	2.880 2.870	2.605 2.595	1.115 1.135	1.365 1.385	.370 .380	.475 .480	.056 .060	2.315 2.313	.331 .311	.678 .698
M24217/10-031	48 NO 16	2.498 2.496	2.254 2.266	3.380 3.360	3.047 3.037	1.115 1.135	1.535 1.555	.370 .380	.615 .620	.056 .060	2.750 2.748	.360 .340	.678 .698
M24217/10-032	8 NO 16	.812 .810	1.016 1.024	1.255 1.245	.967 .977	—	1.120 1.140	.370 .380	.365 .370	.042 .045	1.062 1.060	.207 .187	—
M24217/10-033	3 NO. 0	2.312 2.310	2.412 2.424	3.100 3.090	2.850 2.840	1.500 1.520	1.370 1.380	.375 .385	.484 .489	.056 .060	2.500 2.495	.331 .311	.750 .770

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

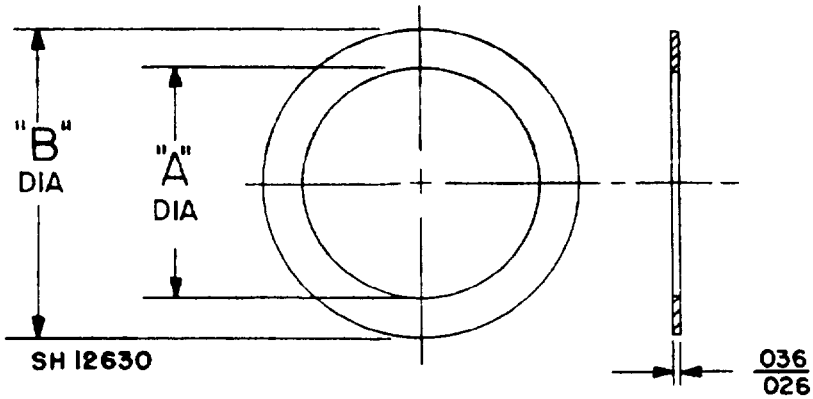

125 / O.A.

FIGURE 3. Thrust washer.

TABLE II. Dimensions for submersible receptacle cap thrust washer.

WASHER PART NUMBER	CONNECTOR TYPE	A	B
M24217/10-043	3 NO 16	.885 / .915	1.265 / 1.235
M24217/10-044	5 NO 16 & 8 NO. 16	1.077 / 1.107	1.515 / 1.485
M24217/10-045	9 NO 16 & 3 NO. 12	1.197 / 1.227	1.765 / 1.735
M24217/10-046	14 NO 16, 5 NO 12 & 3 NO 8	1.512 / 1.542	2.015 / 1.985
M24217/10-047	24 NO 16, 3 NO 4 9 NO 12, 3 NO 8 WITH 3 NO 12	1.885 / 1.915	2.515 / 2.485
M24217/10-048	37 NO 16 & 2 NO 0 WITH 4 NO 12	2.325 / 2.355	3.015 / 2.985
M24217/10-049	48 NO 16	2.760 / 2.790	3.265 / 3.235
M24217/10-050	3 NO. 0	2.512 / 2.542	3.202 / 3.172

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Optional lock wire shall be of nickel copper in accordance with MS20995.
3. Pressure proof receptacle covers are designed for the full submergence pressure of their respective mated receptacle.

Preparing activity:
Navy - SH
(Project 5935-N246-10)

☆U S GOVERNMENT PRINTING OFFICE 1984—705-040/A4543

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.