MILITARY SPECIFICATION SHEET

RECEPTACLE ASSEMBLY (UNION TYPE)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

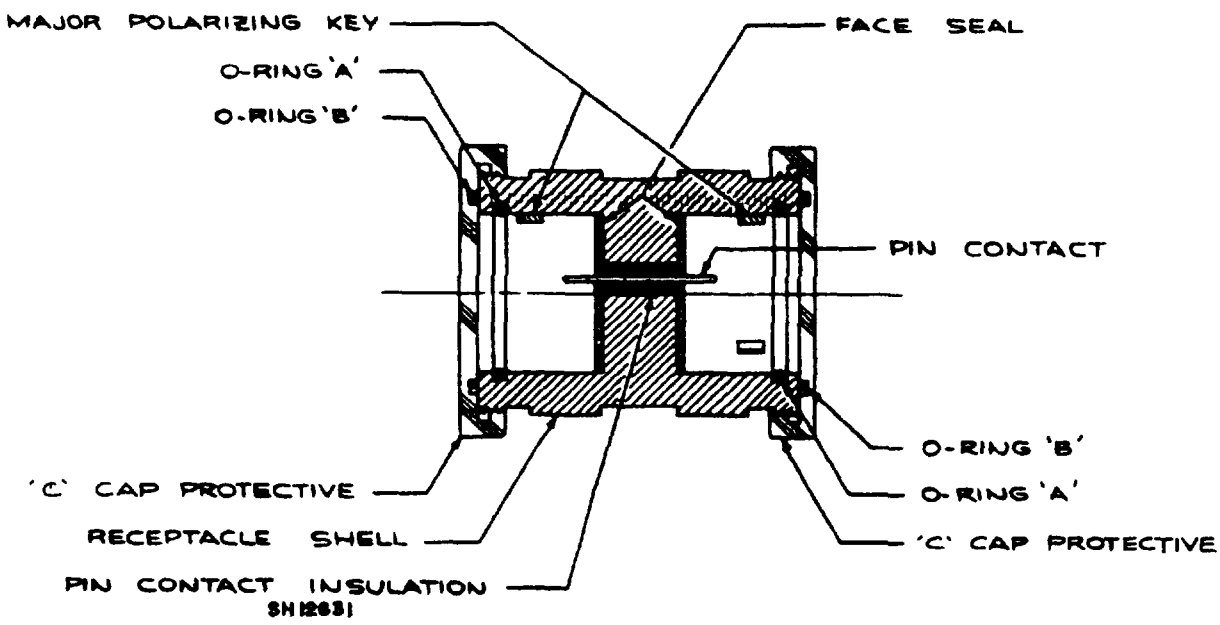


FIGURE 1. Configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

TABLE I. Parts description.

RECEPTACLE ASSY NO.	RECEPTACLE SHELL NO	NO. OF CONTACT & PIN SIZE	'A' O-RING (2 REQD)	'B' O-RING (2 REQD)	'C' PROTECTIVE CAP (2 REQD)
M24217/11-001	M24217/11-025	3 NO. 16	AS 568A-114	AS 568A 117	M24217/1-039
M24217/11-002	M24217/11-026	5 NO. 16	AS 568A-117	AS 568A-121	M24217/1-040
M24217/11-003	M24217/11-027	9 NO. 16	AS 568A-121	AS 568A-125	M24217/1-041
M24217/11-004	M24217/11-028	14 NO. 16	AS 568A-125	AS 568A-129	M24217/1-042
M24217/11-005	M24217/11-029	24 NO 16	AS 568A-131	AS 568A-134	M24217/1-043
M24217/11-006	M24217/11-030	37 NO. 16	AS 568A-137	AS 568A-140	M24217/1-044
M24217/11-007	M24217/11-031	48 NO 16	AS 568A-144	AS 568A-148	M24217/1-045
M24217/11-008	M24217/11-032	3 NO 12	AS 568A-121	AS 568A-125	M24217/1-046
M24217/11-009	M24217/11-033	5 NO 12	AS 568A-125	AS 568A-129	M24217/1-047
M24217/11-010	M24217/11-034	9 NO. 12	AS 568A-131	AS 568A-134	M24217/1-048
M24217/11-011	M24217/11-035	3 NO. 8	AS 568A-125	AS 568A-129	M24217/1-047
M24217/11-012	M24217/11-036	3 NO 4	AS 568A-131	AS 568A-134	M24217/1-048
M24217/11-013	M24217/11-037	3 NO 8 3 NO 12	AS 568A-131	AS 568A-134	M24217/1-048
M24217/11-014	M24217/11-038	2 NO 0 4 NO 12	AS 568A-137	AS 568A-140	M24217/1-049

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

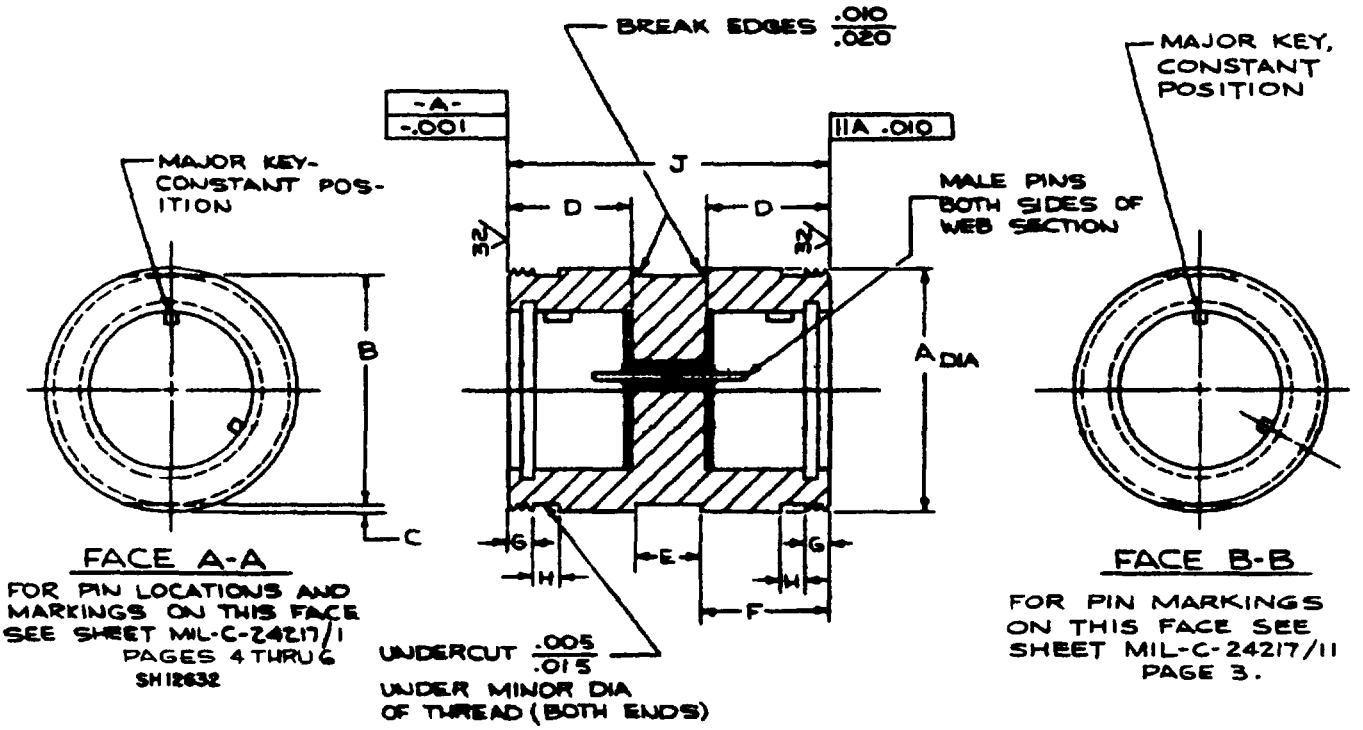


FIGURE 2. Receptacle shell (union type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

PART NO.	NO. OF CONTACTS & PIN SIZE	A	B	C	D	E	F	G	H	J
M24217/11-025	3 NO. 16	1.255 1.245	1.110 1.120	.055 .075	.787 .792	.490 .510	.660 .680	.270 .250	.250 .260	1.932 1.952
M24217/11-026	5 NO 16	1.505 1.495	1.360 1.370	.055 .075	.787 .792	.490 .510	.720 .740	.270 .250	.250 .260	1.957 1.977
M24217/11-027	9 NO. 16	1.755 1.745	1.610 1.620	.055 .075	.787 .792	.615 .635	.725 .745	.270 .250	.250 .260	2.082 2.102
M24217/11-028	14 NO. 16	2.130 2.120	1.985 1.995	.055 .075	.787 .792	.615 .635	.785 .805	.270 .250	.250 .260	2.107 2.127
M24217/11-029	24 NO. 16	2.505 2.495	2.360 2.370	.055 .075	.787 .792	.615 .635	.850 .870	.270 .250	.250 .260	2.332 2.352
M24217/11-030	37 NO 16	3.005 2.995	2.735 2.745	.115 .135	.787 .792	.615 .635	.850 .870	.270 .250	.250 .260	2.332 2.352
M24217/11-031	48 NO. 16	3.755 3.745	3.485 3.495	.115 .135	.787 .792	.615 .635	.850 .870	.410 .390	.250 .260	2.332 2.352
M24217/11-032	3 NO. 12	1.755 1.745	1.610 1.620	.055 .075	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268
M24217/11-033	5 NO. 12	2.130 2.120	1.985 1.995	.055 .075	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268
M24217/11-034	9 NO. 12	2.505 2.495	2.360 2.370	.055 .075	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268
M24217/11-035	3 NO. 8	2.130 2.120	1.985 1.995	.055 .075	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268
M24217/11-036	3 NO. 4	2.505 2.495	2.360 2.370	.055 .075	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268
M24217/11-037	3 NO. 8 3 NO. 12	2.505 2.495	2.360 2.370	.055 .075	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268
M24217/11-038	2 NO. 0 4 NO. 12	3.005 2.995	2.735 2.745	.115 .135	1.250 1.255	.615 .635	1.305 1.325	.707 .687	.250 .260	3.248 3.268

NOTE: FOR ALL OTHER DIMENSIONS, REQUIREMENTS, PARTS, AND CONTACT ARRANGEMENTS, SEE MIL-C-24217/1 (SEA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

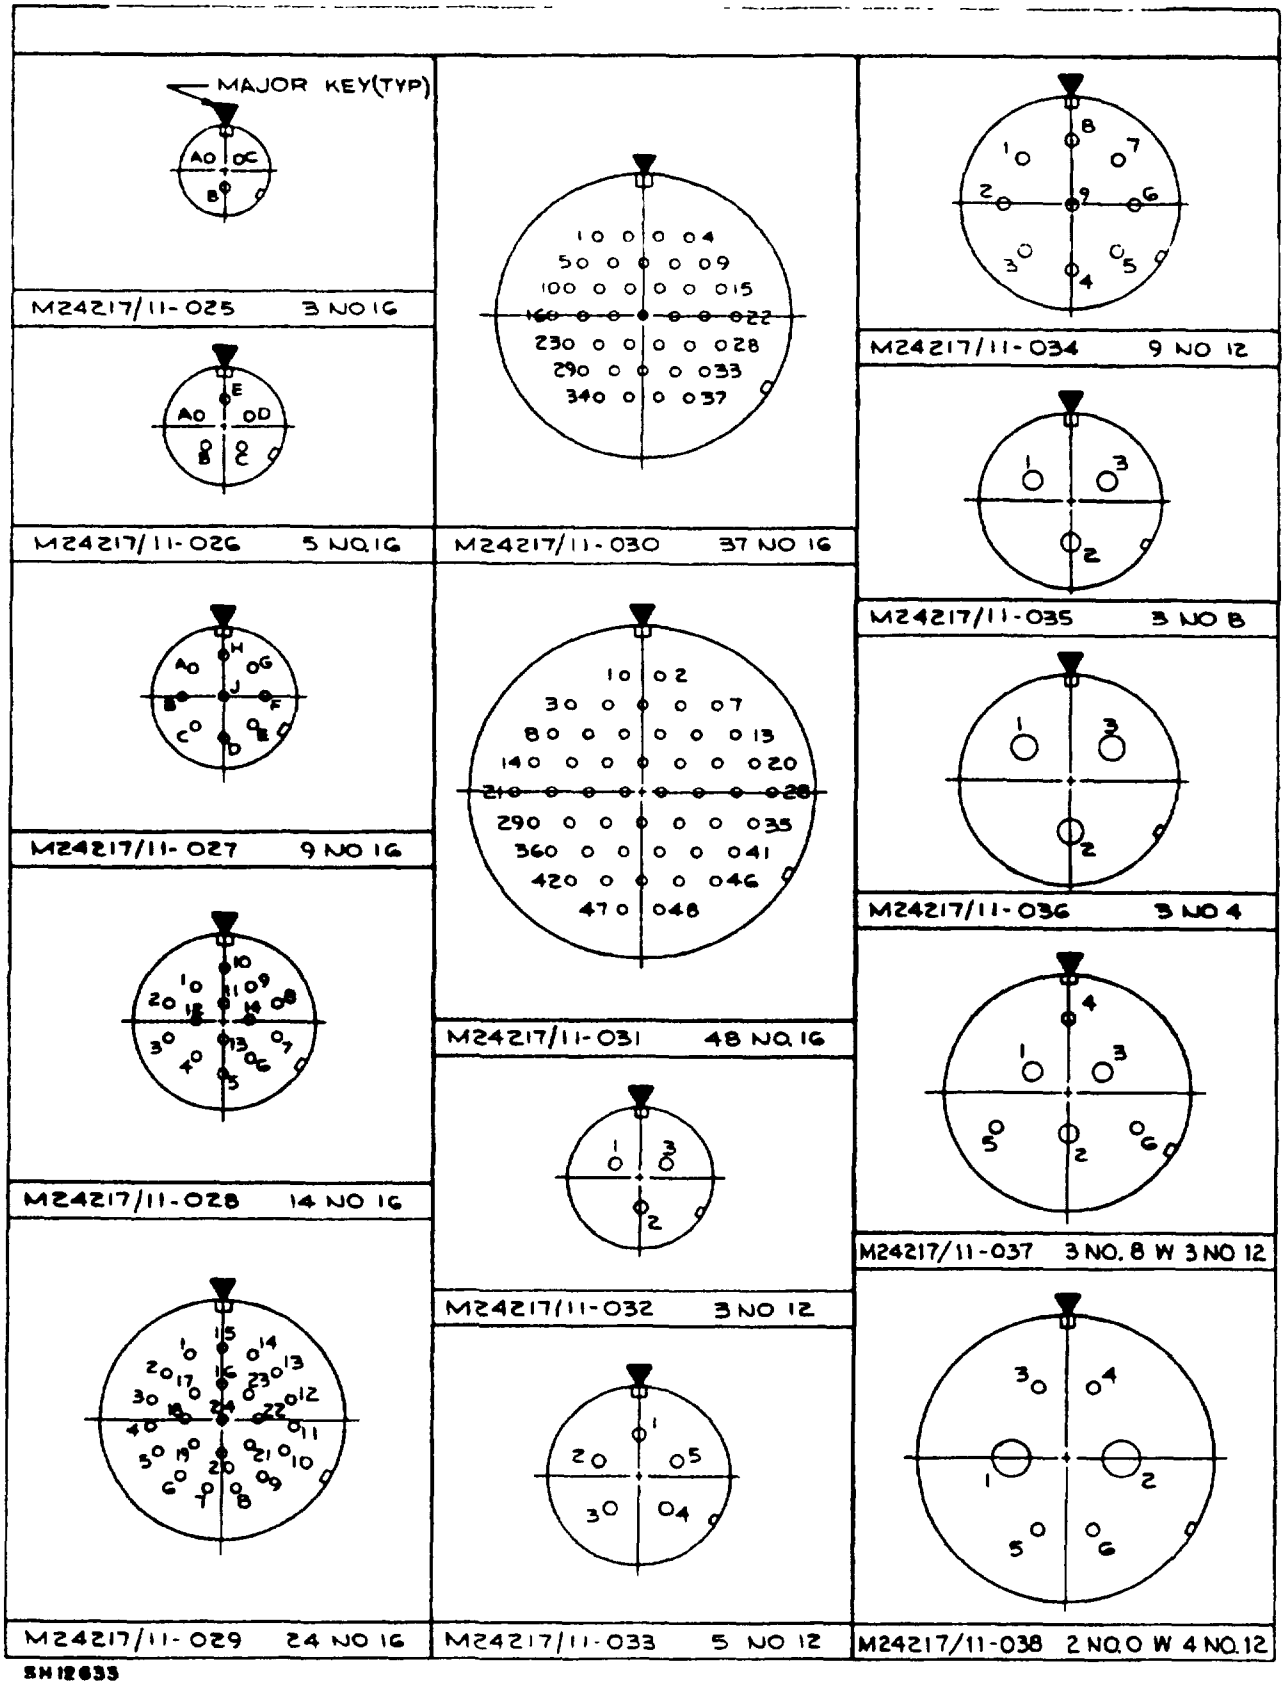


FIGURE 3. Contact arrangements and markings for face.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Union receptacles are used as in line, bulkhead, and other connector applications requiring a through, pin type penetration.
3. Contact gaskets (face seals) may be molded and secured to the receptacle web with adhesive or poured in place using a clear RTV silicone, General Electric RTV 615 with General Electric SS-4120 primer or equal. Either method shall prevent the entrance of water under the seal.
4. Receptacle assemblies shall be packaged as shown in the assembly view (protective covers tightened to compress the O-rings), except that the interior O-rings shall be separately packaged.
5. MIL-C-24217/7 and MIL-C-24217/8 are straight and right angle plug assemblies that mate with the "standard" side of the receptacle (face A-A), while MIL-C-24217/14 and MIL-C-24217/15 are the respective straight and right angle union plugs that couple with the opposite side (face B-B). Refer to table I of the appendix for additional mating data.

Preparing activity:
Navy - SH
(Project 5935-N246-11)

☆U S GOVERNMENT PRINTING OFFICE 1984 — 705-040/A4457

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:04Z
Check the source to verify that this is the current version before use.