MILITARY SPECIFICATION SHEET

RECEPTACLE ASSEMBLY (MID-FLANGE, BOLTED, UNION TYPE)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the receptacle assembly described herein shall consist of this document and the latest issue of MIL-C-24217.

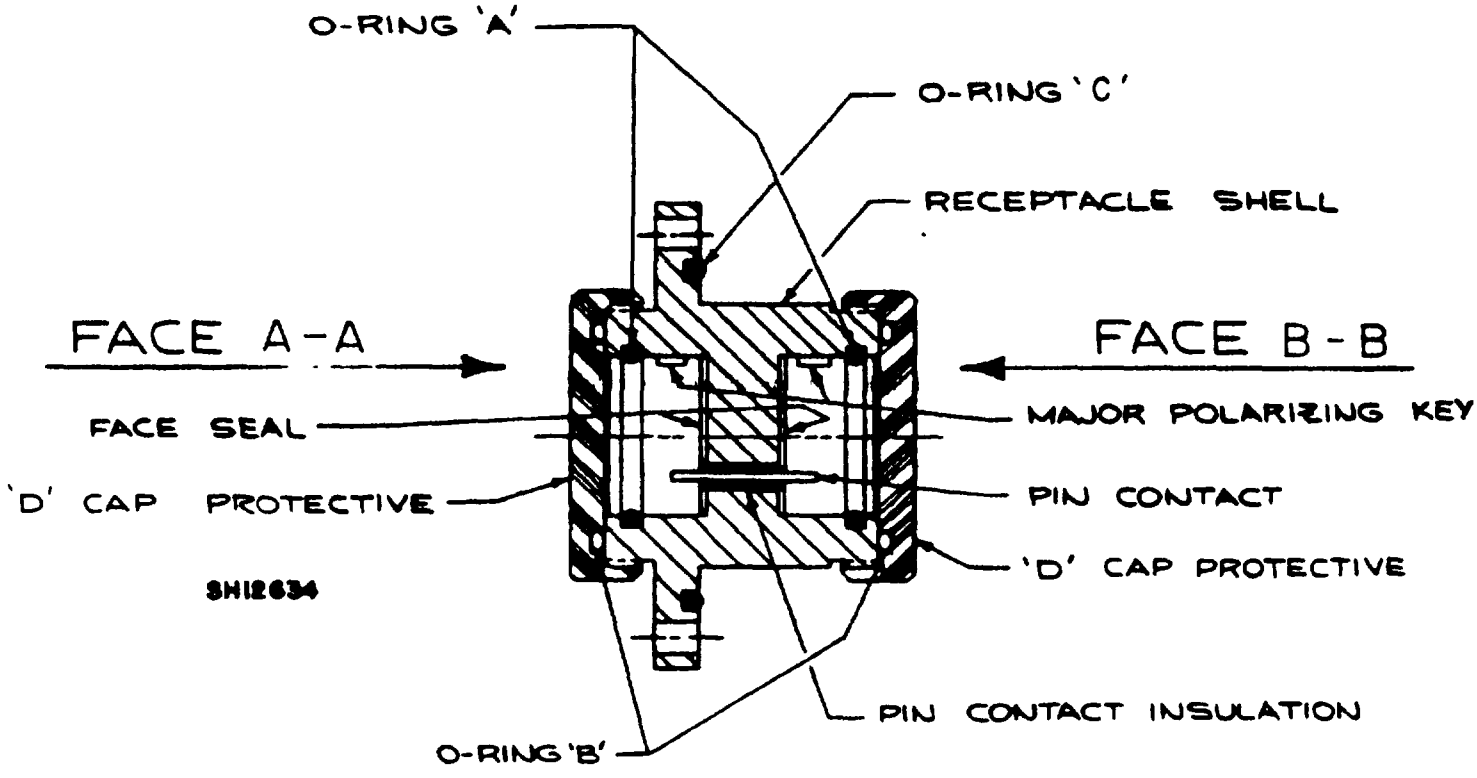


FIGURE 1. Configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

TABLE I. Parts description.

RECEPTACLE ASSY NO	RECEPTACLE SHELL NO	NO OF CONTACTS & PIN SIZE	'A' O-RING (2 REQD)	'B' O-RING (2 REQD)	'C' O-RING (1 REQD)	'D' PROTECTIVE CAP (2 REQD)
M24217/12-001	M24217/12-025	3 NO 16	AS 568A-114	AS 568A-117	AS 568A-230	M24217/1-040
M24217/12-002	M24217/12-026	5 NO. 16	AS 568A-117	AS 568A-121	AS 568A-230	M24217/1-041
M24217/12-003	M24217/12-027	9 NO. 16	AS 568A-121	AS 568A-125	AS 568A-230	M24217/1-042
M24217/12-004	M24217/12-028	14 NO 16	AS 568A-125	AS 568A-129	AS 568A-230	M24217/1-043

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

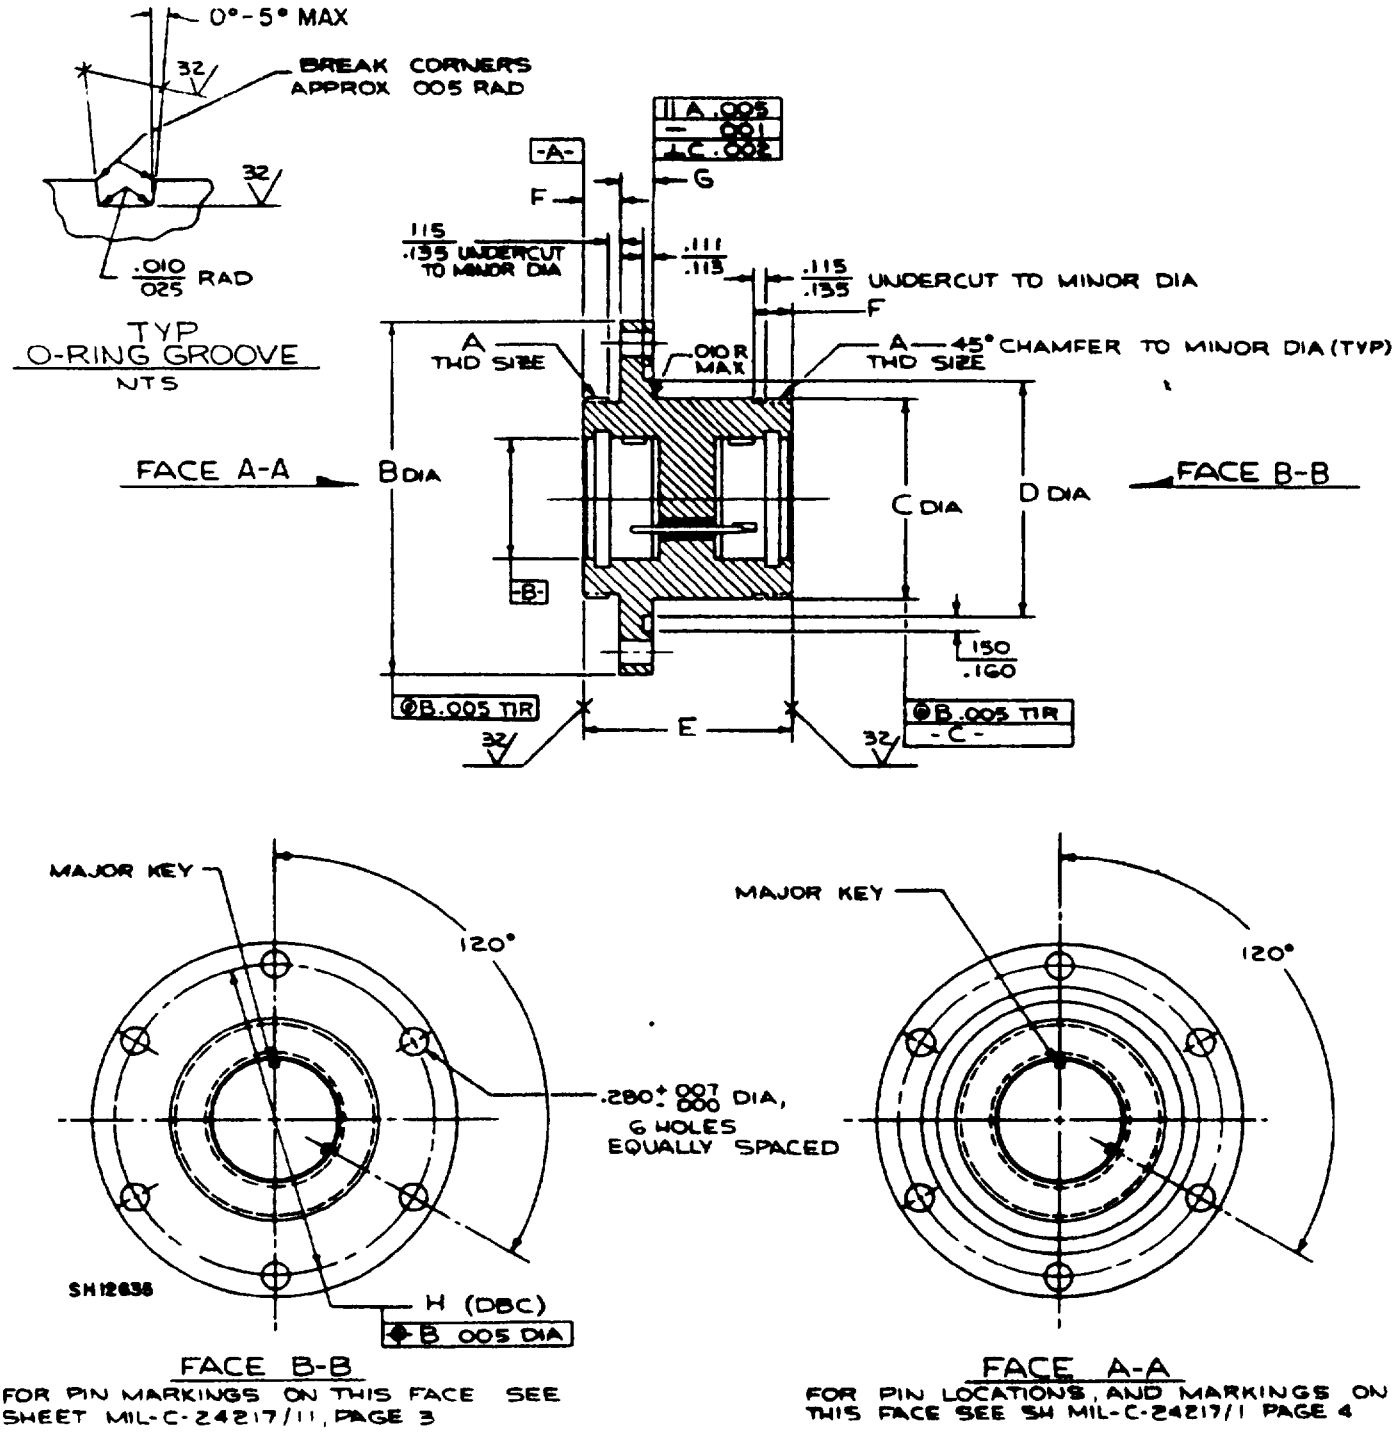


FIGURE 2. Receptacle shell (mid-flange, bolted, union type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions.

PART NO	NO. & SIZE OF CONTACTS	A THREAD SIZE	B DIA	C DIA	D DIA	E	F	G	H (DBC) ±.005
M24217/12-025	3 NO 16	1 1/4-12UNF-2A	3.770 / 3.750	1.255 / 1.245	2.510 / 2.505	2.127 / 2.107	.370 / .380	.328 / .296	3.250
M24217/12-026	5 NO 16	1 1/2-12UNF-2A	3.770 / 3.750	1.505 / 1.495	2.510 / 2.505	2.127 / 2.107	.370 / .380	.328 / .296	3.250
M24217/12-027	9 NO 16	1 3/4-12UN-2A	3.770 / 3.750	1.755 / 1.745	2.510 / 2.505	2.127 / 2.107	.370 / .380	.328 / .296	3.250
M24217/12-028	14 NO. 16	2 1/8-12UN-2A	3.770 / 3.750	2.130 / 2.120	2.510 / 2.505	2.127 / 2.107	.370 / .380	.328 / .296	3.250

NOTE FOR ALL OTHER DIMENSIONS, REQUIREMENTS, PARTS, AND CONTACT ARRANGEMENTS SEE MIL-C-24217/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Union receptacles are used as in-line, bulkhead, and other connector applications requiring a through, pin type penetration.
3. Contact gaskets (face seals) may be molded and secured to the receptacle web with adhesive or poured in place using a clear RTV silicone, General Electric RTV 615 with General Electric SS-4120 primer or equal. Either method shall prevent the entrance of water under the seal.
4. Receptacle assemblies shall be packaged as shown in the assembly view (protective covers tightened to compress the O-rings), except that the interior and flange O-rings shall be separately packaged.
5. Outboard or flange side plug assemblies are detailed on MIL-C-24217/7 (straight plugs) and MIL-C-24217/8 (right angle plugs). Inboard plug assemblies are shown on MIL-C-24217/14 (straight union plugs) and MIL-C-24217/15 (right angle union plugs). Refer to table I of the appendix for additional mating data.

Preparing activity:
Navy - SH
(Project 5935-N246-12)

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 705-040/A4602

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.