MILITARY SPECIFICATION SHEET

UNION PLUG ASSEMBLIES, STRAIGHT

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the union plug assemblies described herein shall consist of this document and the latest issue of MIL-C-24217.

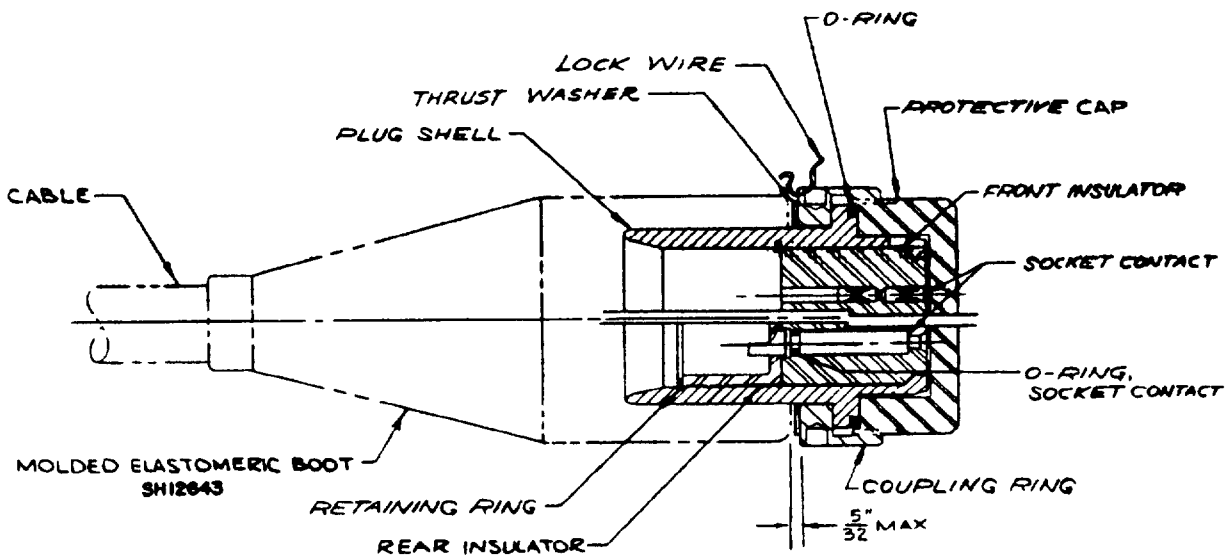


FIGURE 1. Configuration.

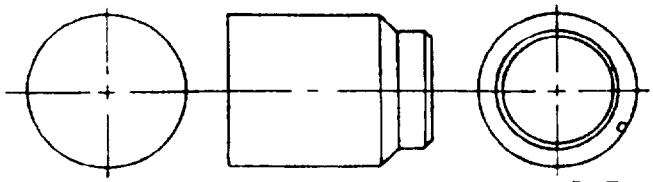
FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers for straight plug assemblies.




















PLUG ASSEMBLY NUMBER	SOCKET CONTACT	C-RING, SOC CONTACT AS-568A	NO AND SIZE OF CONTACTS	PLUG SHELL NUMBER	COUPLING RING NUMBER	FRONT INSULATOR NUMBER	REAR INSULATOR NUMBER	SHELL O RING AS-568A	THRUST WASHER NUMBER	RET RING SPIROLOX NUMBER	PROT CAP NUMBER
M24217/14 001	MS17804 16-16	———	3 NO 16	M24217/ 7-024	M24217/ 7-039	M24217/ 14-025	—	-117	M24217/ 7-095	UR-62S	M24217/ 7-078
M24217/14 002	MS17804 16 20										
M24217/14 003	MS17804 16 16	———	5 NO 16	M24217/ 7-025	M24217/ 7-040	M24217/ 14 026	--	-122	M24217/ 7-094	UR-75S	M24217/ 7-079
M24217/14 004	MS17804-16 20										
M24217/14 005	MS17804 16 16	———	9 NO 16	M24217/ 7-027	M24217/ 7-041	M24217/ 14-027	—	-126	M24217/ 7 095	UR-87S	M24217/ 7-080
M24217/14 006	MS17804-16 20										
M24217/14 007	MS17804 16 16	———	14 NO 16	M24217/ 7-028	M24217/ 7-042	M24217/ 14-028	—	-132	M24217/ 7-096	UR-112 S	M24217/ 7 081
M24217/14 008	MS17804 16 20										
M24217/14 009	MS17804 16-16	———	24 NO 16	M24217/ 7-029	M24217/ 7-043	M24217/ 14 029	—	-138	M24217/ 7 097	UR-150S	M24217/ 7-082
M24217/14 010	MS17804-16 20										
M24217/14 011	MS17804 16-16	———	37 NO 16	M24217/ 7-030	M24217/ 7-044	M24217/ 14 030	—	-145	M24217/ 7-098	UR-181 S	M24217/ 7-083
M24217/14 012	MS17804 16 20										
M24217/14-013	MS17804-16-16	———	48 NO 16	M24217/ 7-031	M24217/ 7-045	M24217/ 14 031	—	-151	M24217/ 7-099	UR-225S	M24217/ 7-084
M24217/14 014	MS17804 16 20										
M24217/14 015	M24217/7-089	-004	3 NO 12	M24217/ 7-032	M24217/ 7-046	M24217/ 14-032	M24217/ 7-071	-126	M24217/ 7-095	UR-87S	M24217/ 7 085
M24217/14 016	M24217/7-089	-004	5 NO 12	M24217/ 7-033	M24217/ 7-047	M24217/ 14-033	M24217/ 7-072	-132	M24217/ 7-096	UR-112S	M24217/ 7-086
M24217/14 017	M24217/7 089	-004	9 NO 12	M24217/ 7-034	M24217/ 7-048	M24217/ 14-034	M24217/ 7-073	-138	M24217/ 7 097	UR-150S	M24217/ 7-087
M24217/14 018	M24217/7-090	-007	3 NO 8	M24217/ 7-035	M24217/ 7-047	M24217/ 14-035	M24217/ 7 074	-132	M24217/ 7-096	UR-112 S	M24217/ 7-086
M24217/14 019	M24217/7-091	-010	3 NO 4	M24217/ 7-036	M24217/ 7-048	M24217/ 14 036	M24217/ 7-075	-138	M24217/ 7-097	UR-150S	M24217/ 7-087
M24217/14 020	M24217/7-089	-004	3 NO 12 WITH 3 NO 8	M24217/ 7-037	M24217/ 7-048	M24217/ 14 037	M24217/ 7-076	-138	M24217/ 7-097	UR-150 S	M24217/ 7-087
	M24217/7-090	-007									
M24217/14 021	M24217/7-092	-013	2 NO 0 WITH 4 NO 12	M24217/ 7-038	M24217/ 7-049	M24217/ 14-038	M24217/ 7-077	-145	M24217/ 7-098	UR-181 S	M24217/ 7-088
	M24217/7-089	-004									

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.





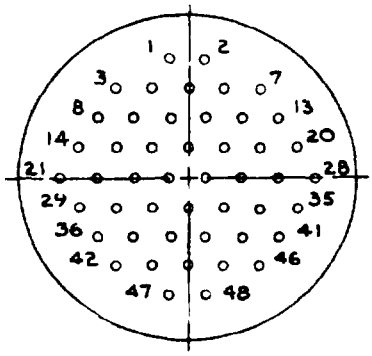
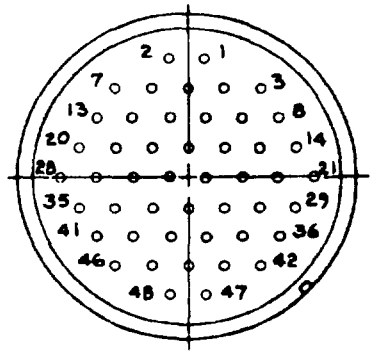




FACE A-A FACE B-B

FOR ALL DIMENSIONS AND REQUIREMENTS EXCEPT FRONT AND REAR FACE MARKINGS, SEE MIL-C-24217/7

FACE A-A	FACE B-B	FACE A-A	FACE B-B
			
M24217/14-025 3 NO. 16		M24217/14-032 3 NO. 12	
			
M24217/14-026 5 NO 16		M24217/14-033 5 NO. 12	
			
M24217/14-027 9 NO 16		M24217/14-034 9 NO. 12	
			
M24217/14-028 14 NO. 16		M24217/14-035 3 NO. 8	
			
M24217/14-029 24 NO 16		M24217/14-036 3 NO. 4	

SH12644

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

FRONT INSULATOR PART NUMBER	NO & SIZE OF CONTACTS	FACE A-A	FACE B-B
M24217/14-030	37 NO. 16		
M24217/14-031	48 NO. 16		
M24217/14-037	3 NO. 8 WITH 3 NO. 12		
M24217/14-038	2 NO 0 WITH 4 NO 12		

SH12648

FIGURE 3. Contact arrangements and markings for front insulator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures and tables.
2. Union plugs are "mirror image" plugs, designed to mate with union receptacles on the non-standard (generally the inboard) side.
3. Optional lock wire shall be of nickel copper in accordance with MS20995.

Preparing activity:
Navy - SH
(Project 5935-N246-14)

☆U S GOVERNMENT PRINTING OFFICE 1984 — 705-040/A4468

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.