MILITARY SPECIFICATION SHEET

UNION PLUG ASSEMBLIES, RIGHT ANGLE

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the union plug assemblies described herein shall consist of this document and the latest issue of MIL-C-24217.

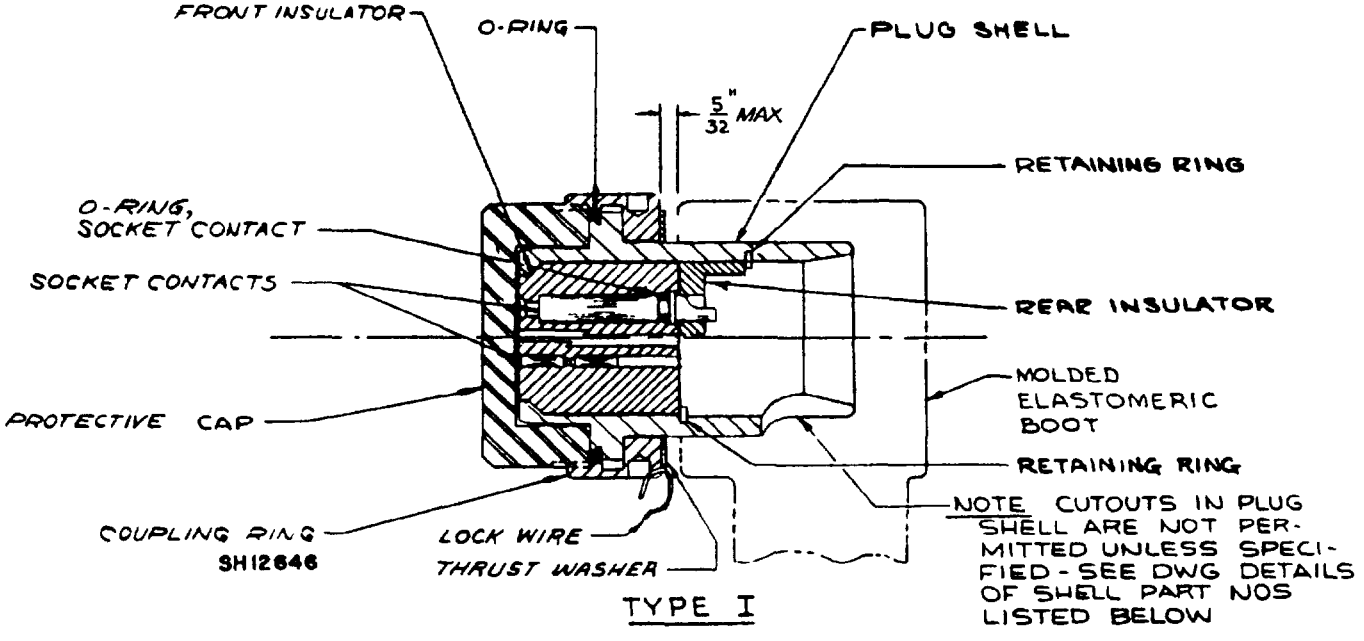


FIGURE 1. Configuration, type I.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers for right angle plug assemblies.

PLUG ASSEMBLY NUMBER	SOCKET CONTACT	O-RING, SOC CONTACT AS-568A	NO AND SIZE OF CONTACTS	PLUG SHELL NUMBER	COUPLING RING NUMBER	FRONT INSULATOR NUMBER	REAR INSULATOR NUMBER	PROT CAP NUMBER	THRUST WASHER NUMBER	RET RING SPIROLOX NUMBER	SHELL O-RING AS-568A
M24217/15 001	MS17804-16-16	———	3 NO.16	M24217/7-024	M24217/7-039	M24217/14-025	———	M24217/7-078	M24217/7-093	UR-62S	-117
M24217/15-002	MS17804-16-20										
M24217/15-003	MS17804 16-16	———	5 NO.16	M24217/7-025	M24217/7-040	M24217/14-026	———	M24217/7-079	M24217/7-094	UR-75S	-122
M24217/15-004	MS17804 16-20										
M24217/15-005	MS17804-16-16	———	9 NO 16	M24217/7-027	M24217/7-041	M24217/14-027	———	M24217/7-080	M24217/7-095	UR-87S	-126
M24217/15 006	MS17804-16-20										
M24217/15 007	MS17804-16-16	———	14 NO.16	M24217/8-035	M24217/7-042	M24217/14-028	———	M24217/7-081	M24217/7-096	UR-112S	-132
M24217/15 008	MS17804-16-20										
M24217/15-009	MS17804 16-16	———	24 NO16	M24217/8-036	M24217/7-043	M24217/14-029	———	M24217/7-082	M24217/7-097	UR-150S	-138
M24217/15-010	MS17804-16-20										
M24217/15-011	MS17804-16-16	———	37 NO.16	M24217/8-037	M24217/7-044	M24217/14-030	———	M24217/7-083	M24217/7-098	UR-181S	-145
M24217/15-012	MS17804-16 20										
M24217/15-013	MS17804 16-16	———	48 NO.16	M24217/8-038	M24217/7-045	M24217/14-031	———	M24217/7-084	M24217/7-099	UR-225S	-151
M24217/15-014	MS17804-16-20										
M24217/15-015	M24217/7-089	-004	3 NO.12	M24217/7-032	M24217/7-046	M24217/14-032	M24217/7-071	M24217/7-085	M24217/7-095	UR-87S	-126
M24217/15-016	M24217/7-089	-004	5 NO.12	M24217/8-039	M24217/7-047	M24217/14-033	M24217/8-058	M24217/7-086	M24217/7-096	UR-112S	-132
M24217/15-017	M24217/7-089	-004	9 NO.12	M24217/8-040	M24217/7-048	M24217/14-034	M24217/8-059	M24217/7-087	M24217/7-097	UR-150S	-138
M24217/15-018	M24217/7090	-007	3 NO 8	M24217/8-041	M24217/7-047	M24217/14-035	M24217/8-060	M24217/7-086	M24217/7-096	UR-112S	-132
M24217/15 019	M24217/7-091	-010	3 NO. 4	M24217/8-040	M24217/7-048	M24217/14-036	M24217/8-061	M24217/7-087	M24217/7-097	UR-150S	-138
M24217/15-020	M24217/7 089	-004	3 NO.12 WITH 3 NO. 8	M24217/8-040	M24217/7-048	M24217/14-037	M24217/8-062	M24217/7-087	M24217/7-097	UR-150S	-138
	M24217/7 090	-007									
M24217/15-021	MS17804-16-16	———	14 NO. 16 (SPECIAL)	M24217/8-042	M24217/7-042	M24217/14-028	———	M24217/7-081	M24217/7-096	UR-112S	-132
M24217/15 022	M24217/7-089	-004	3 NO 12 (SPECIAL)	M24217/15-051	M24217/15-050	M24217/14-032	M24217/7-071	M24217/15-040	M24217/7-095	UR-87S	———

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

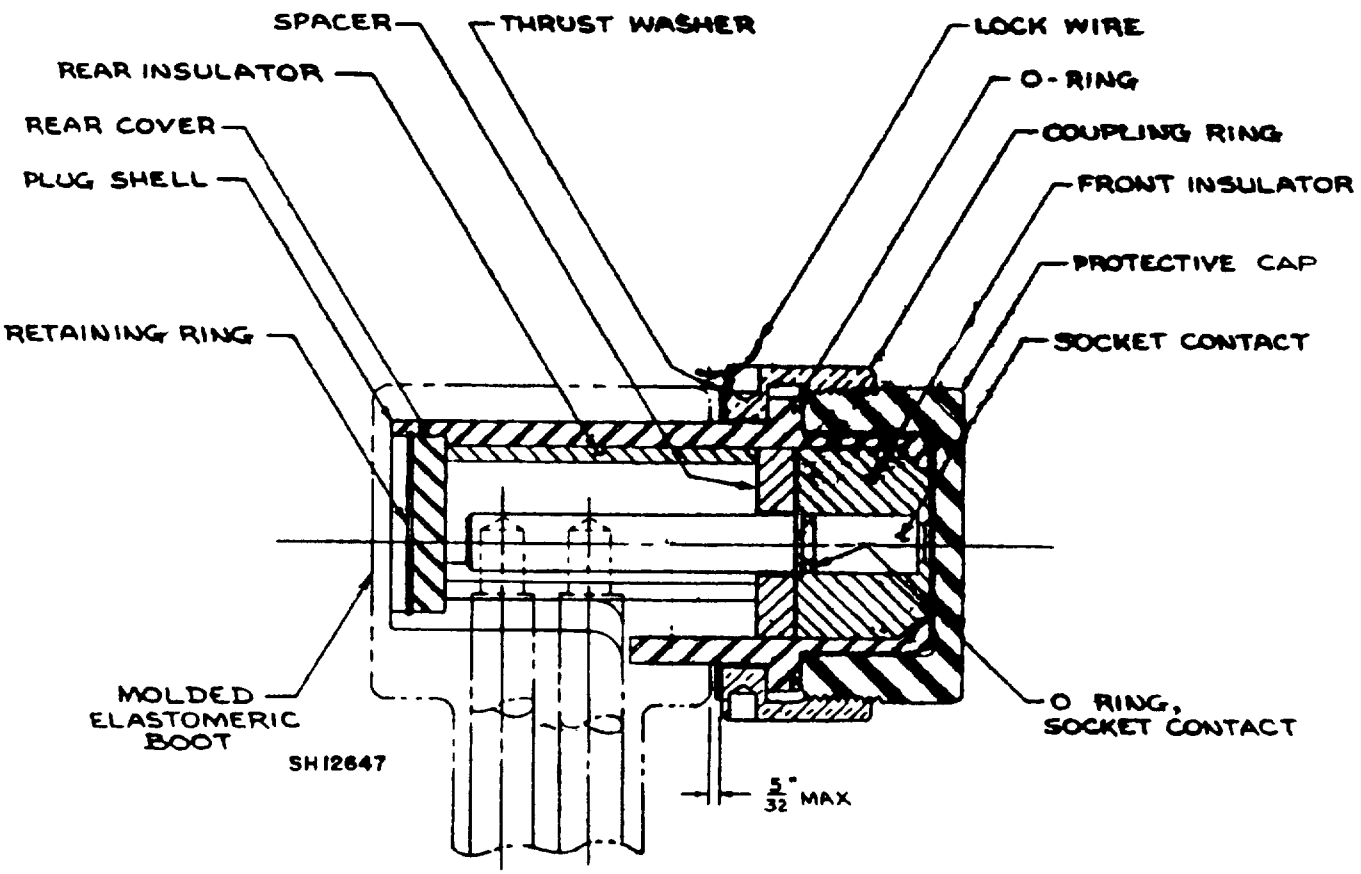


FIGURE 2. Configuration, type II.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

TABLE II. Part numbers for right angle plug assemblies.

PLUG ASSEMBLY NUMBER	SOCKET CONTACT	O-RING SOCKET CONTACT AS 568A	NO. AND SIZE OF CONTACTS	PLUG SHELL NUMBER	COUPLING RING NUMBER	FRONT INSULATOR NUMBER	REAR INSULATOR NUMBER	PROTECTIVE CAP NUMBER	THRUST WASHER NUMBER	RETAINING RING SPIROLOX NUMBER	SHELL O-RING AS-' 568A	REAR COVER	SPACER
M24217/ 15-025	M24217/ 8-080	-013	2 NO 0 WITH 4 NO. 12	M24217/ 8-048	M24217/ 7-049	M24217/ 14-038	M24217/ 8-070	M24217/ 7-086	M24217/ 7-098	UR 2005	-145	M24217/ 8-114	M24217/ 8-076
	M24217/ 7-089	-004											
M24217/ 15-026	M24217/ 8-081*	-013	3 NO 0 STYLE E	M24217/ 8-049	M24217/ 8-087	M24217/ 15-035	M24217/ 8-071	M24217/ 8-093	M24217/ 8-106	UR-2315	-147	M24217/ 8-115	M24217/ 8-075
	M24217/ 8-082*	-013											
M24217/ 15-027	M24217/ 8-081*	-013	3 NO. 0 STYLE-F	M24217/ 8-050	M24217/ 8-087	M24217/ 15-035	M24217/ 8-071	M24217/ 8-093	M24217/ 8-106	UR-2315	-147	M24217/ 8-115	M24217/ 8-075
	M24217/ 8-082*	-013											
M24217/ 15-028	M24217/ 8-081*	-013	3 NO. 0 STYLE-G	M24217/ 8-051	M24217/ 8-087	M24217/ 15-035	M24217/ 8-071	M24217/ 8-093	M24217/ 8-106	UR-2315	-147	M24217/ 8-115	M24217/ 8-075
	M24217/ 8-082*	-013											
M24217/ 15-029	M24217/ 8-081*	-013	3 NO. 0 STYLE-H	M24217/ 8-052	M24217/ 8-087	M24217/ 15-035	M24217/ 8-071	M24217/ 8-093	M24217/ 8-106	UR-2315	-147	M24217/ 8-115	M24217/ 8-075
	M24217/ 8-082*	-013											

*NOTE TWO SOCKET CONTACTS OF EACH SIZE SHALL BE FURNISHED WITH EACH PLUG ASSEMBLY.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

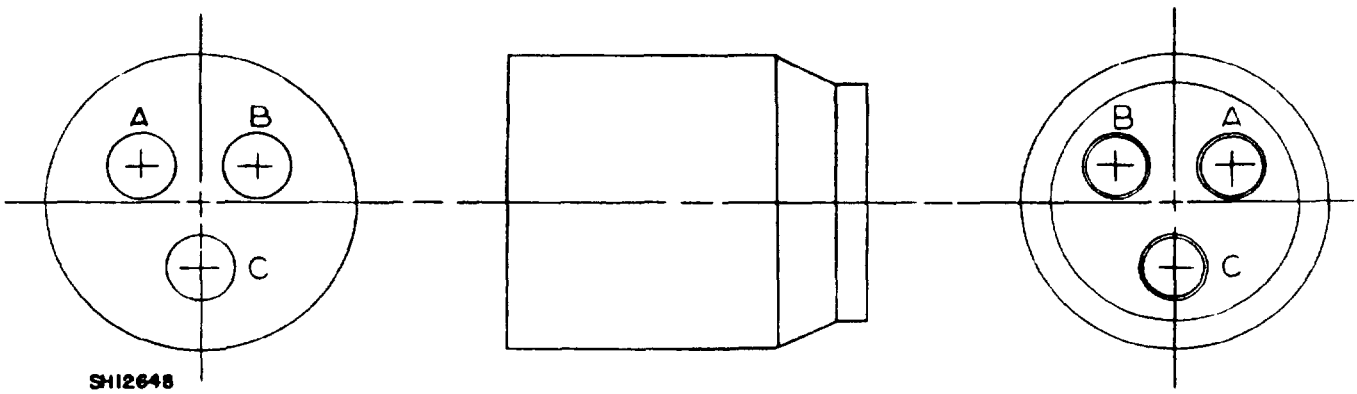

NOTE: For all dimensions and requirements except front and rear face markings, see part no. M24217/8-099.

FIGURE 3. Front Insulator.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

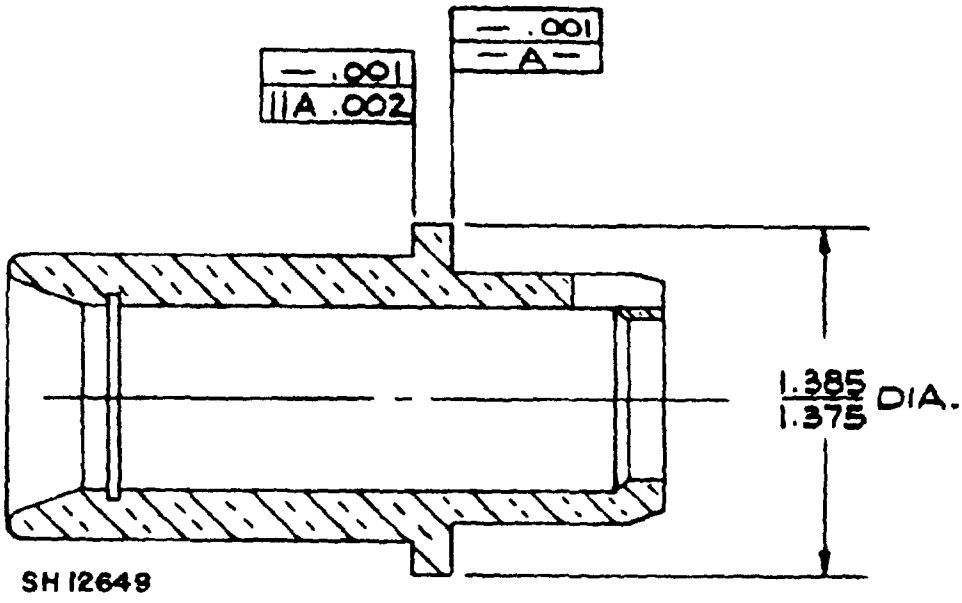

M24217/15-031

(OTHER DIMENSIONS SAME AS M24217/7-032)

FIGURE 4. Plug shell.

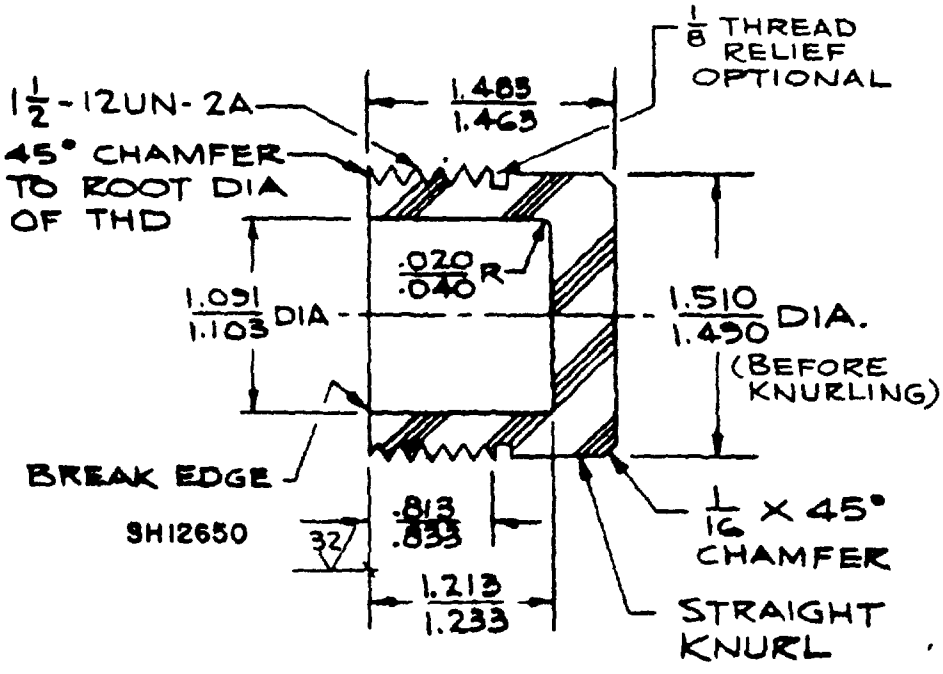

M24217/15-040

FIGURE 5. Protective cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

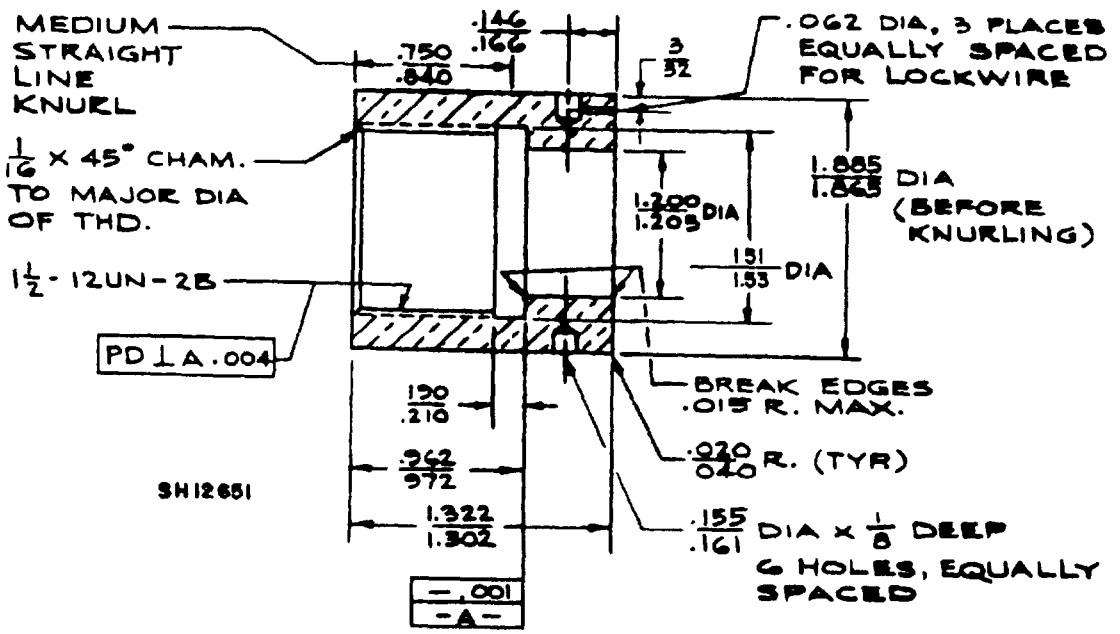


FIGURE 6. Coupling ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configurations: See figures and tables.
2. Union plugs are "mirror image" plugs, designed to mate with union receptacles on the non-standard (generally the inboard) side.
3. Spacing between the coupling ring and the molded elastomeric boot shall not exceed 5/32 inch to ensure adequate bonding area.
4. Optional lock wire shall be of nickel copper in accordance with MS20995, and furnished by the installing activity.
5. Plug shells, for right angle union plugs, ordered from another specification sheet shall not be modified to include a cutout.

Preparing activity:
Navy - SH
(Project 5935-N246-15)

☆ U.S. GOVERNMENT PRINTING OFFICE 1984—705-040/A4459

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:05Z
Check the source to verify that this is the current version before use.