INCH-POUND
A-A-50106B
February 24, 2000
SUPERSEDING
A-A-50106A
February 21, 1990

COMMERCIAL ITEM DESCRIPTION

STOPPER, WIRED, WEDGED

The General Services Administration has authorized the use of this Commercial Item Description for all Federal agencies.

1. **SCOPE.** This commercial item description covers the requirement for wired stoppers to be used to provide security for personnel and equipment in operations invoking steep ascents by placing the wired stoppers into cracks in rocks.

2. **CLASSIFICATION.** The wired stoppers shall be furnished in the following sizes as specifed:

Table I.

			Wire loop		
Size	Stopper Height, inches	Stopper Width, inches	Wire Diameter, inches	Min. breaking Strength	Total Weight
I	0.335 ± 0.020	0.170 ± 0.020	0.0625 + 0.010 - 0.000	772 lbs.	0.3 oz.
II	0.400 ± 0.020	0.195 ± 0.020	0.0625 + 0.010 - 0.000	772 lbs.	0.4 oz.
III	0.475 ± 0.020	0.283 ± 0.020	0.0930 + 0.012 - 0.000	1433 lbs.	0.8 oz.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DSCP-COET, 700 Robbins Ave, Philadelphia, PA 19111-5096.

AMSC N/A **FSC 8465**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.

Table I. (cont'd)

	Wire loop				
Size	Stopper Height, inches	Stopper Width, inches	Wire Diameter, inches	Min. breaking Strength	Total Weight
IV	0.520 ± 0.020	0.330 ± 0.020	0.0930 + 0.012 - 0.000	1433 lbs.	1.14 oz.
V	0.650 ± 0.020	0.460 ± 0.020	0.1250 + 0.014 - 0.000	2425 lbs.	1.42 oz
VI	0.750 ± 0.020	0.530 ± 0.020	0.1250 + 0.014 - 0.000	2425 lbs.	1.82 oz.
VII	0.855 ± 0.020	0.600 ± 0.020	0.1250 + 0.014 - 0.000	2425 lbs.	2.21 oz.
VIII	1.250 ± 0.020	0.900 ± 0.020	0.1250 + 0.014 - 0.000	2425lbs.	3.39 oz.

3. **SALIENT CHARACTERISTICS.**

3.1 Design and construction. The wedged shaped stopper portion of the wired stopper shall be 6061 – T6 or 7075 aluminum for sizes I, II, and III. The wedged shaped stopper portion of the wired stopper sizes IV through VIII shall be 6061 - T6 aluminum. The wired portion and wire loop cable shall be either galvanized steel or stainless steel. The wire loop cable shall protrude 7.5 ± 0.500 inches below the bottom of the stopper head. The wired stopper shall be constructed and comply with the requirements in table I (see figure I).

3.1.1 Tests. The wired stoppers shall be pull tested by sliding the stopper to the center of the wire there by exposing the looped ends of the wire. The two looped ends shall be placed over two steel dowels approximately 3/8 inches in diameter and pull tested to 60 percent of the wire's minimum breaking strength (see table I). Any breaks in the wire strands, slippage of wires through the swage, or permanent deformation shall constitute failure of the test, and rejection of the unit on which the failure occurred. One unit out of every 100 shall be pulled for this requirement. This test is to be performed at room temperature. Any industrial testing machine may be used to determine compliance with this requirement.

4. **REGULATORY REQUIREMENTS.** The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. **QUALITY ASSURANCE PROVISIONS.**

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and to be the same product

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.

offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Visual examination. Each item shall be examined for the defects listed below.

Defects. Finish not smooth and adherent; not free of burrs, rough spots, sharp edges, slivers, flat areas or projections; any component missing or not specified type; any component fractured, split, dented, bowed, malformed, damaged or loose; signs of strand breakage unusual wear or kinks; bends are not smooth and continuous; markings in wrong locations, incomplete, illegible, or not as specified.

5.3 Dimensional examination. The wired wedged stoppers shall be examined without damaging or disassembling the item. Any dimension not within the specified tolerances shall be classified as a defect.

5.4 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING.

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Products known to meet this CID. Below is only a sampling of known suppliers and not an all-inclusive list.

1. Adventure Tech, Inc
   4124 N. Burns Road
   Spokane, WA 99216

2. Climb High
   1861 Shelburne Road
   Shelburne, Vermont 05482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army – GL
Navy – NU
Air Force – 99

Review Activities
Air Force – 11.6
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY
GSA - FSS

PREPARING ACTIVITY:
DLA-CT

Project Number
8465-0297

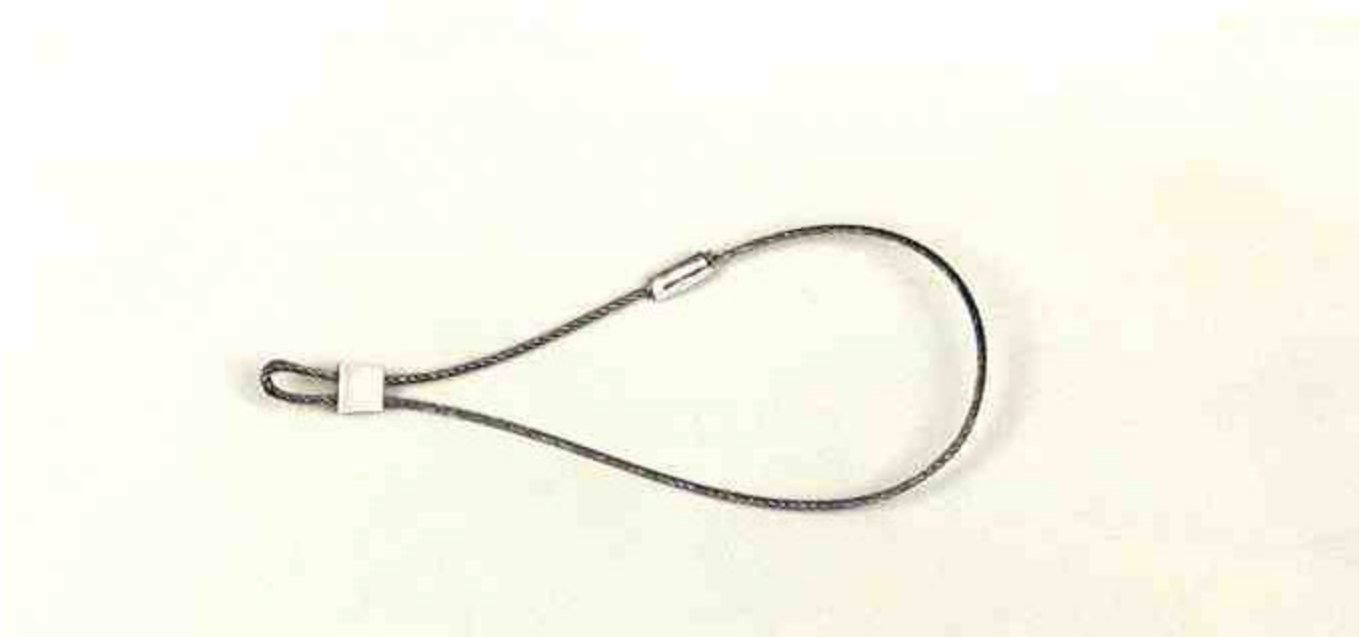

Stopper, Wired, Wedged

Figure I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:39Z
Check the source to verify that this is the current version before use.