NOT MEASUREMENT SENSITIVE


MIL-D-3943/96B
24 June 1994
SUPERSEDING
MIL-D-3943/96A
31 March 1987

MILITARY SPECIFICATION SHEET

DECORATION, EXCEPTIONAL SERVICE MEDAL, UNIFORMED SERVICES, UNIVERSITY OF THE HEALTH SCIENCES

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

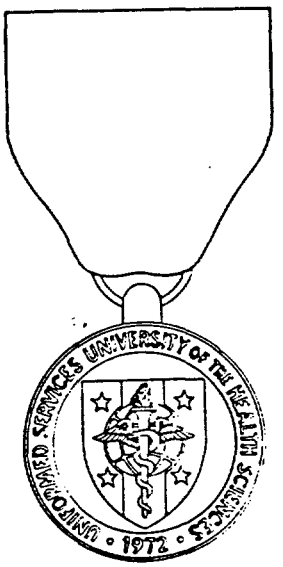

OBVERSE



REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:
HEIGHT (Including Lug):
-1: 1-7/16 inches (3.65 cm) (REF)
-2: 23/32 inch (1.83 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:43Z
Check the source to verify that this is the current version before use.

DIAMETER:
-1: 1-1/4 inches (3.18 cm) (REF)
-2: 5/8 inch (1.59 cm) (REF)

THICKNESS (At Edge):
-1: 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)
-2: 0.070 inch ± 0.010 inch (0.178 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type XVI with a Type XVI, Class 1 pad.

3. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/237.

4. The lapel button shall conform to MIL-L-11484/128.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0763)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T00:43Z
Check the source to verify that this is the current version before use.