
MILITARY SPECIFICATION SHEET
CONNECTOR SETS, PLUG ASSEMBLY, 138-PIN, MISSILE SIDE


The complete requirements for procuring the plug assembly described herein shall consist of this document and the latest issue of MIL-C-22249(SHIPS)

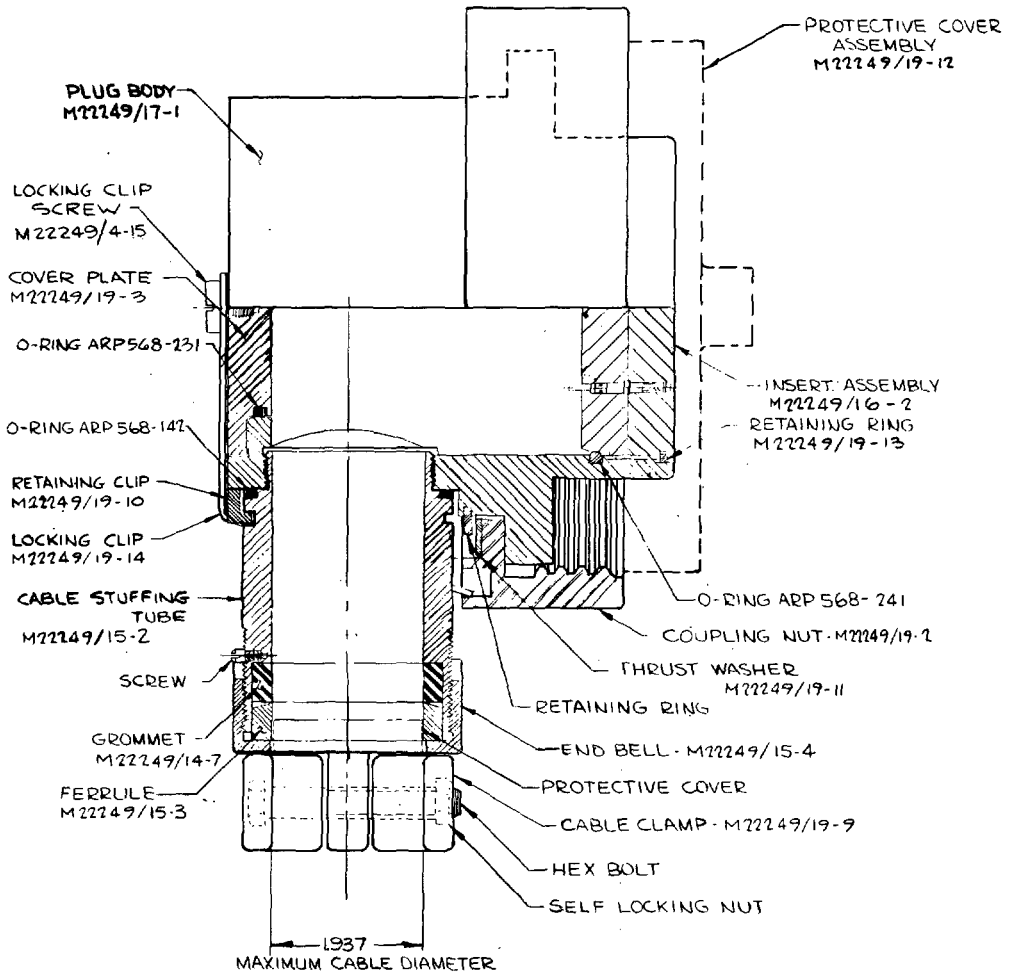

PLUG ORIENTATION: 3 O'CLOCK


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

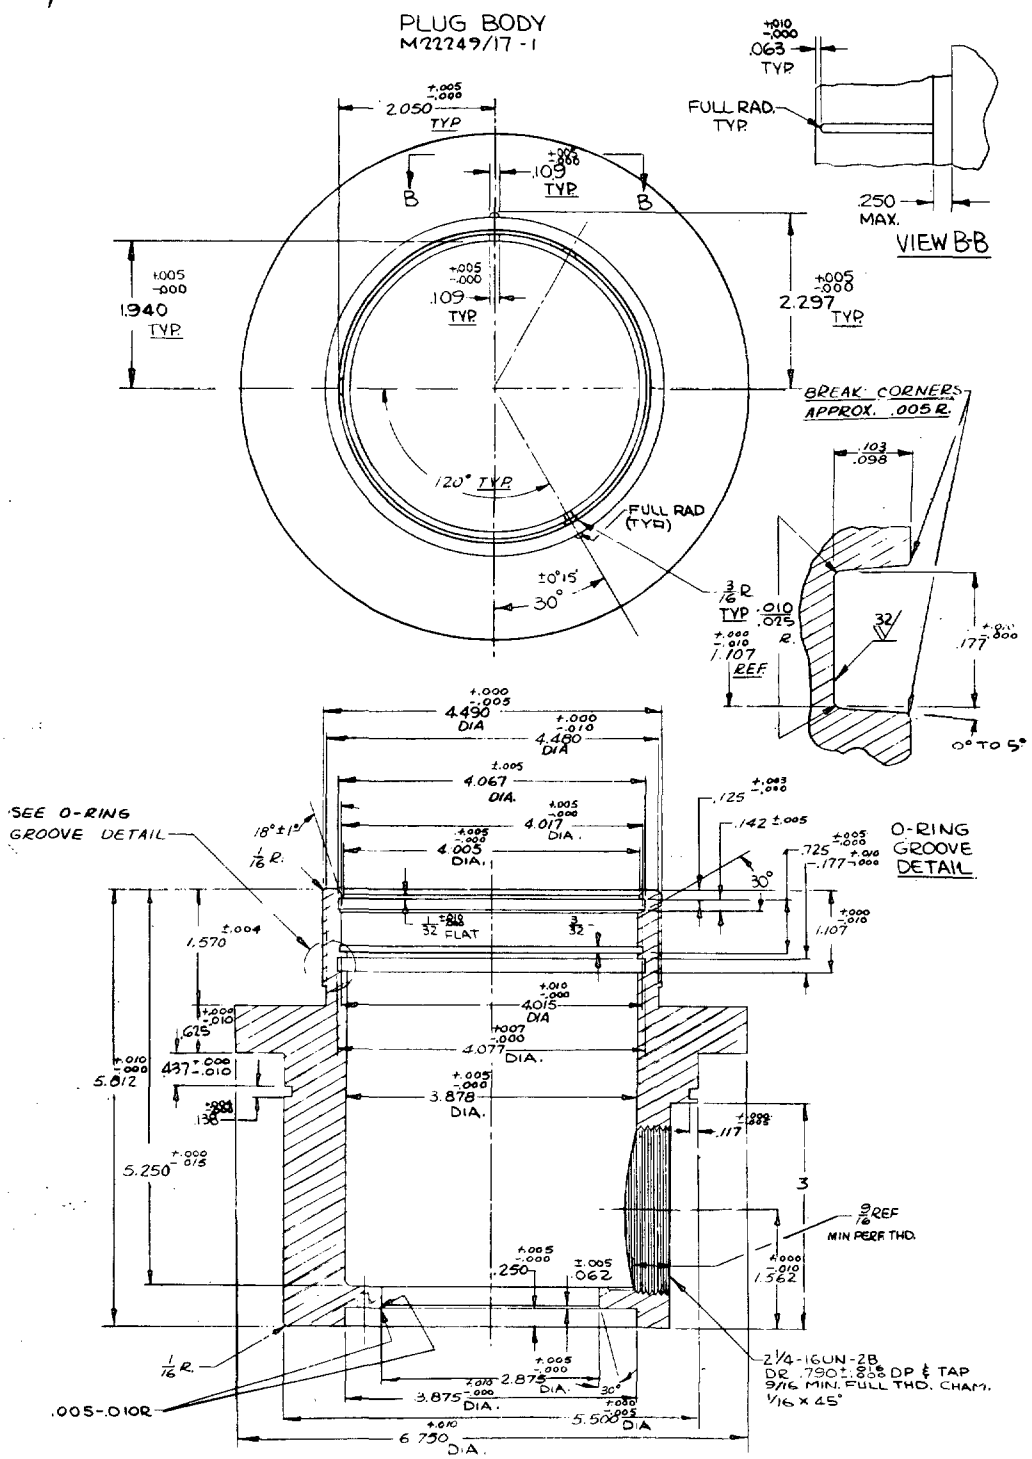


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

PLUG BODY (M22249/17-1)
END VIEW

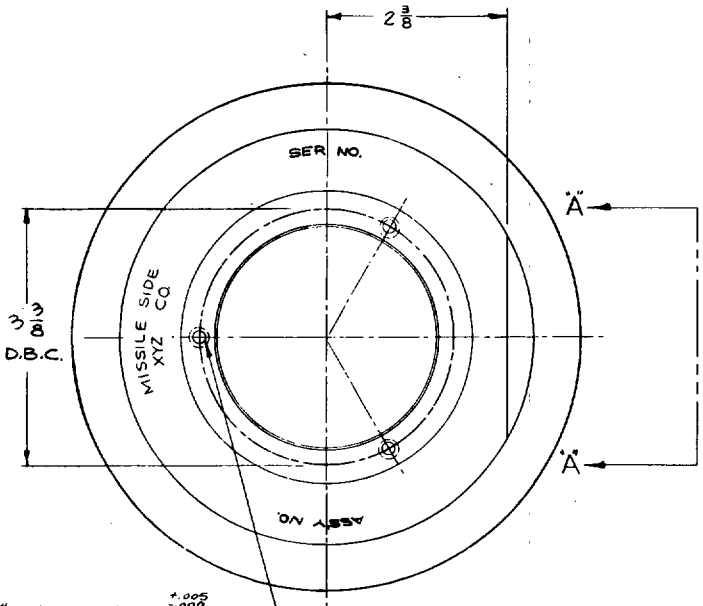

DRILL #21 (.159 DIA.) .250 $^{+.005}_{-.000}$ DEEP
BOTTOM TAP #10-32 NF-2B THREAD 3/16 DEEP
3 HOLES EQUALLY SPACED
DO NOT BREAK THRU.

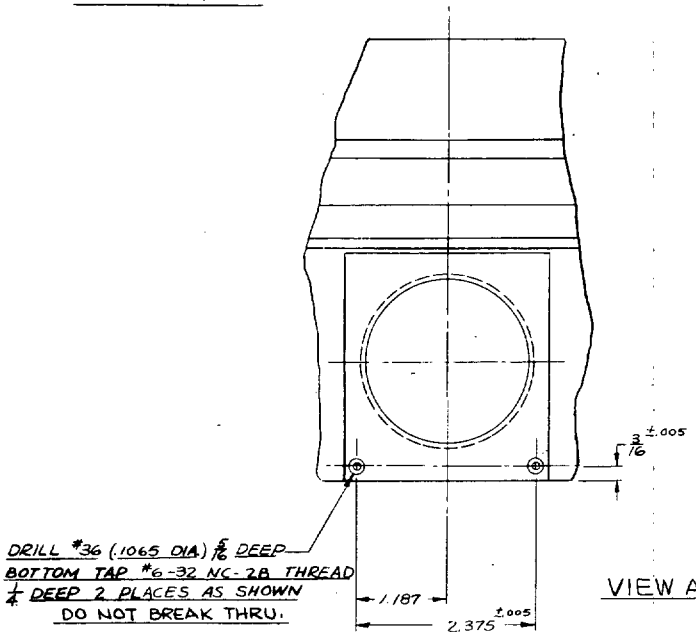

DRILL #36 (.1065 DIA.) 5/16 DEEP
BOTTOM TAP #6-32 NC-2B THREAD
1/4 DEEP 2 PLACES AS SHOWN
DO NOT BREAK THRU.

VIEW A-A

Preparing activity:
Navy - SH
(Project 5935-N517-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.