
INCH-POUND
MIL-C-22249/19A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/19(SHIPS)
19 APRIL 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 175-PIN, COMPARTMENT SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

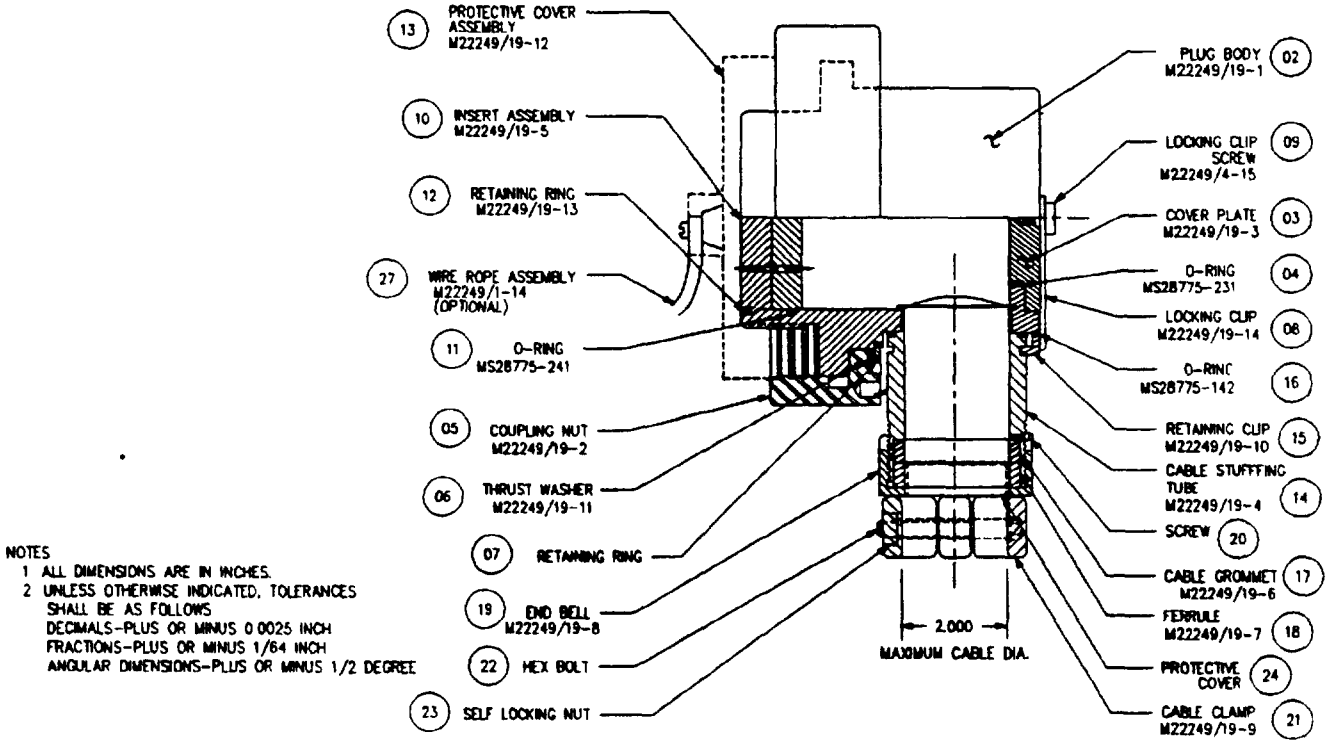


NOTES
1 ALL DIMENSIONS ARE IN INCHES.
2 UNLESS OTHERWISE INDICATED, TOLERANCES SHALL BE AS FOLLOWS
DECIMALS-PLUS OR MINUS 0.0025 INCH
FRACTIONS-PLUS OR MINUS 1/64 INCH
ANGULAR DIMENSIONS-PLUS OR MINUS 1/2 DEGREE


FIGURE 1. Plug assembly, 175-pin, compartment side. (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

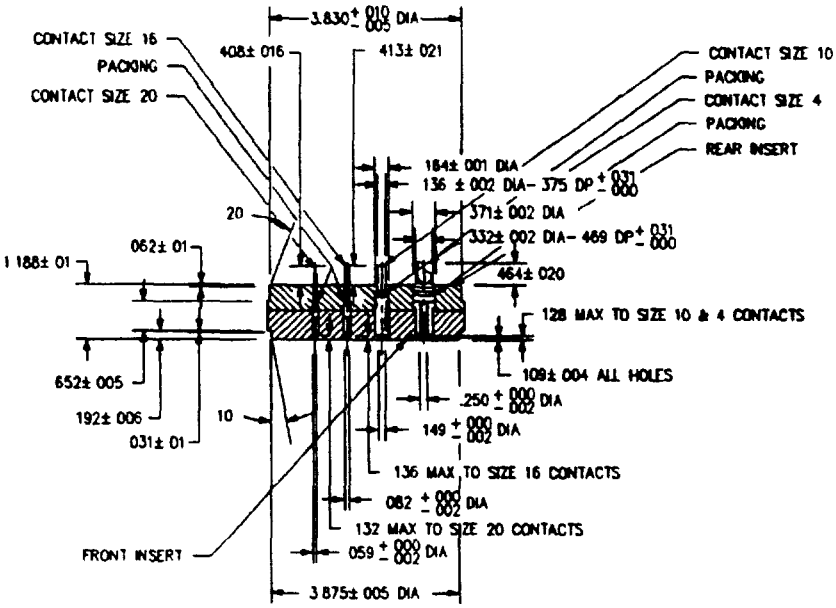

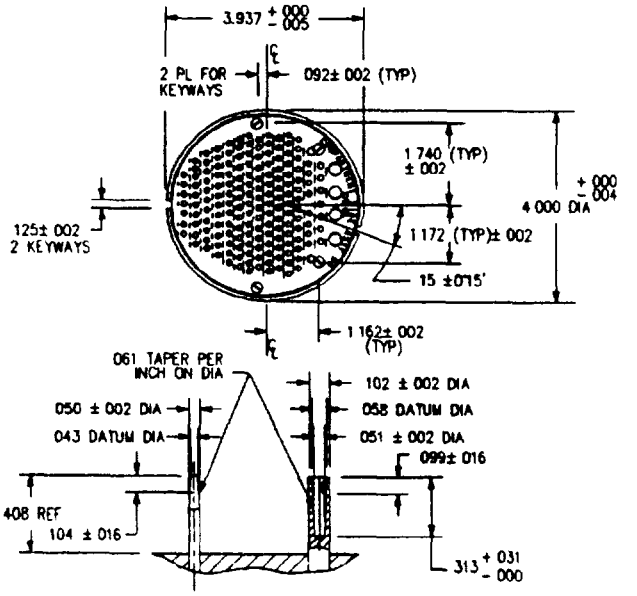

ENLARGED VIEW #53 & #37 SERIES AMP TAPERS

NOTE. SEE M22249/21-2 FOR SOCKET CONTACT LAYOUT

FIGURE 2 Insert assembly - 175-pin compartment side M22249/19-5. (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

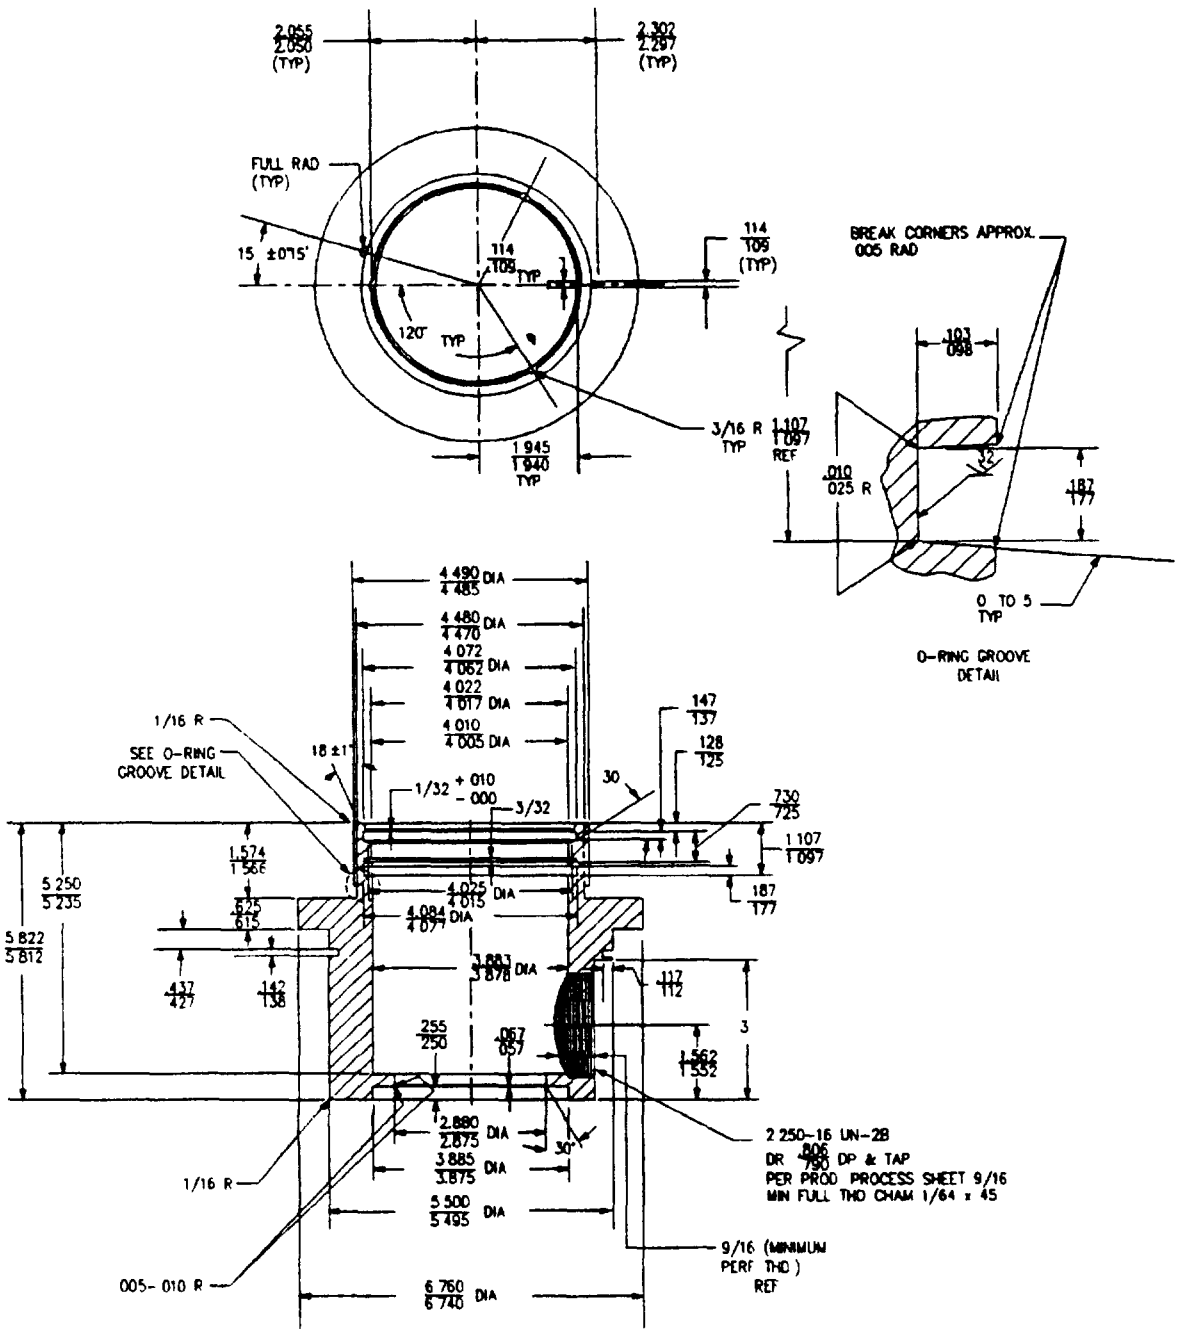
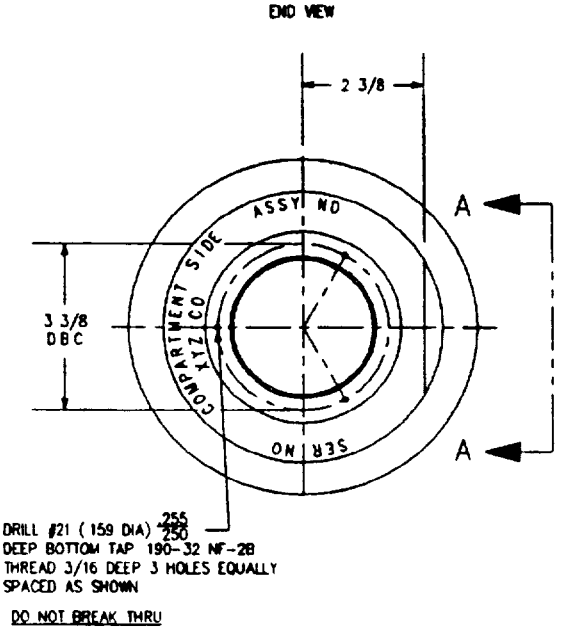


FIGURE 3. Plug body M22249/19-1. 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.



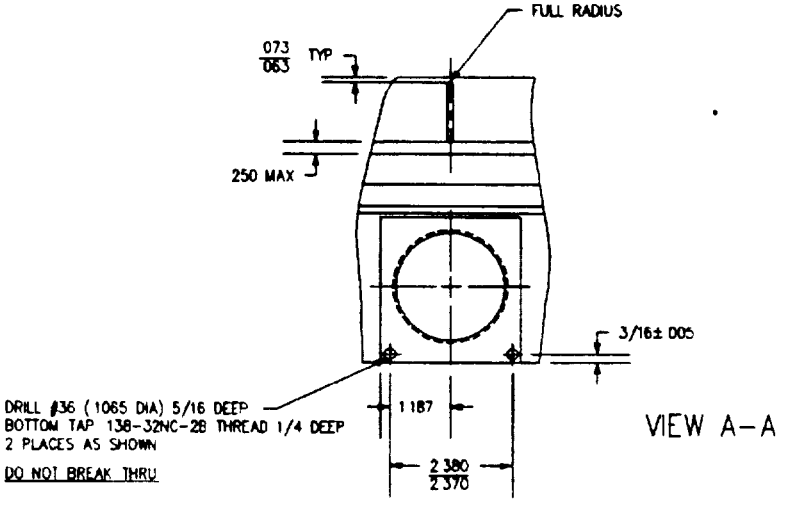


FIGURE 3. Plug body M22249/19-1 - Continued (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

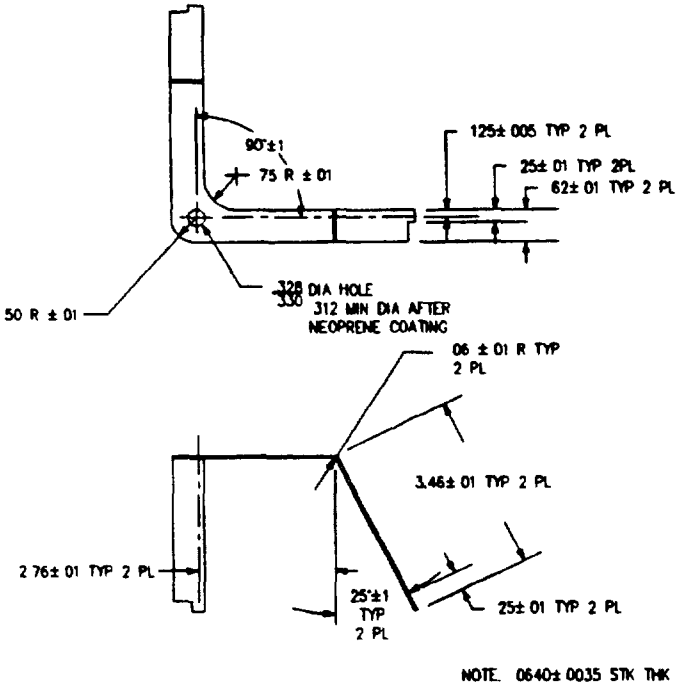


FIGURE 4. Locking clip M22249/19-14. 08

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

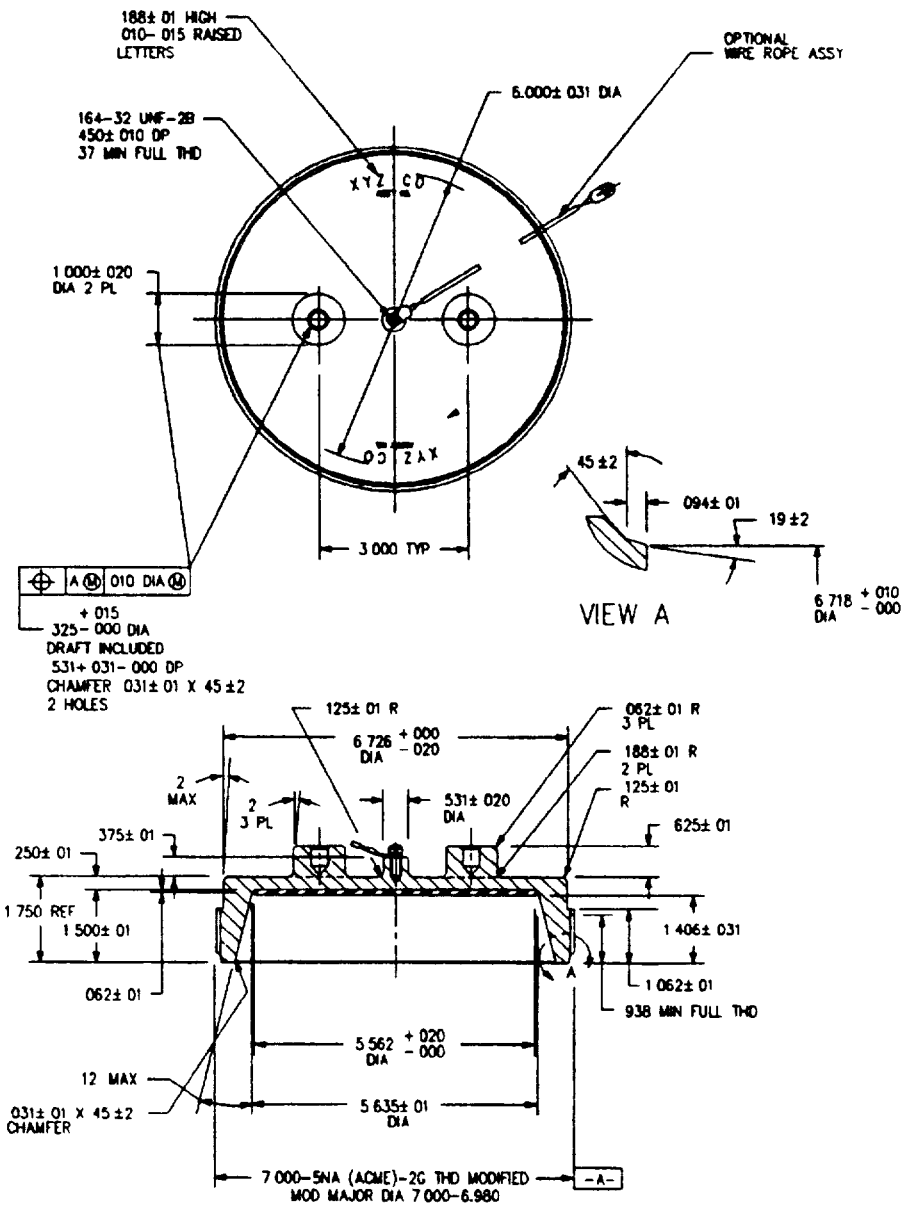


FIGURE 5. Protective cover M22249/19-12. (13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

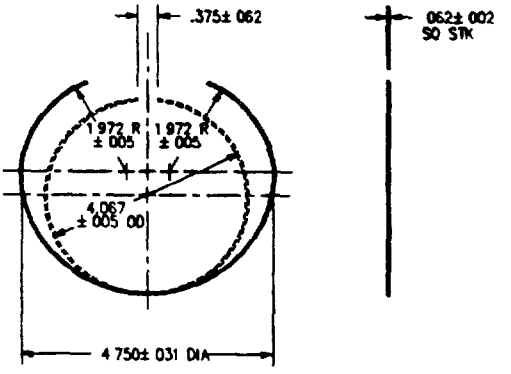


FIGURE 6. Retaining ring M22249/19-13. (12)

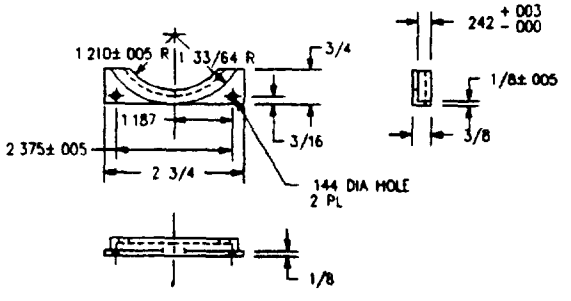


FIGURE 7. Retaining clip, M22249/19-10. (15)

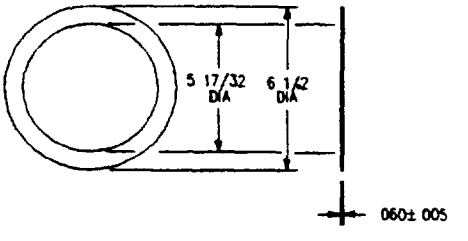


FIGURE 8. Thrust washer, M22249/19-11. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

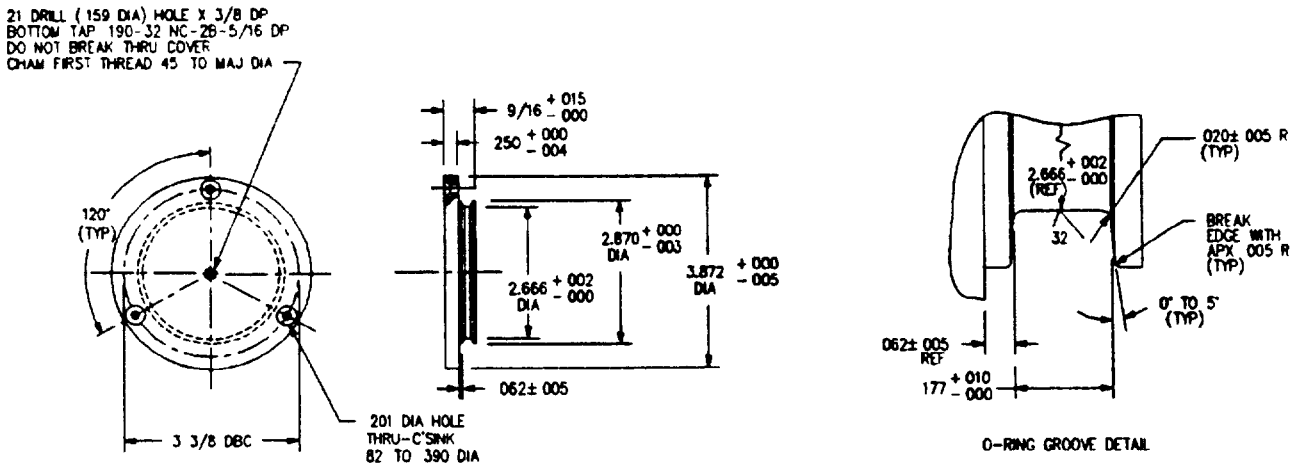


FIGURE 9. Cover plate M22249/19-3. (03)

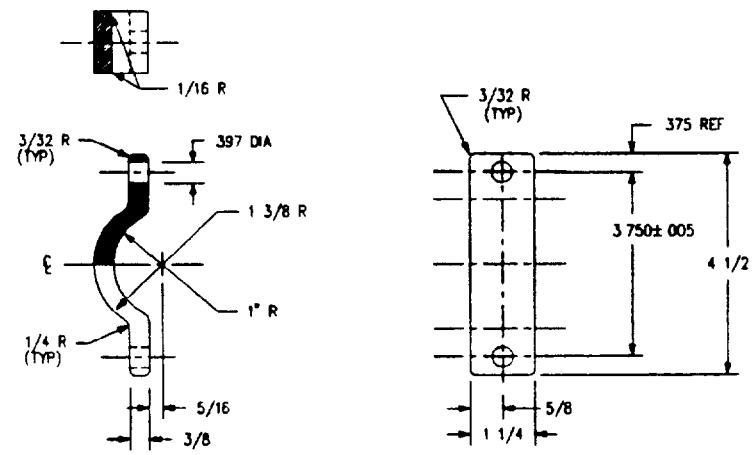


FIGURE 10 Cable clamp M22249/19-9 (21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

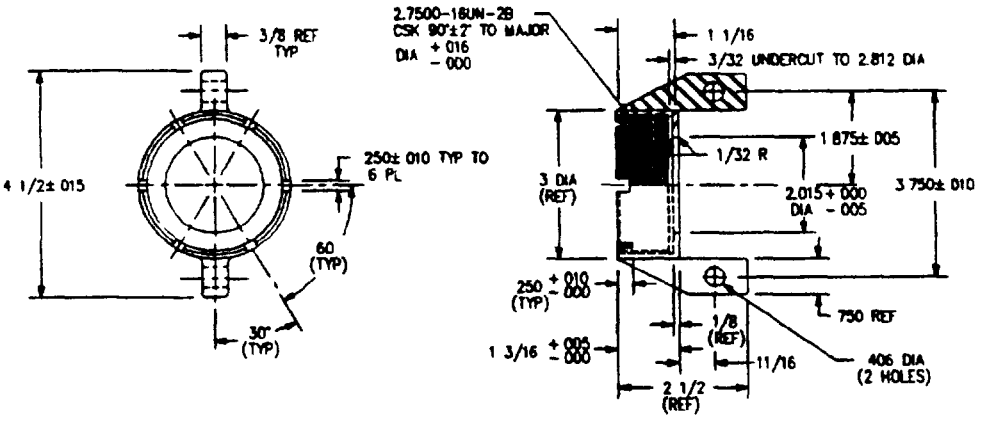


FIGURE 11. End bell M22249/19-8. (19)

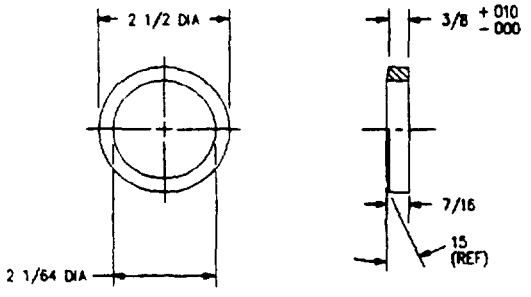


FIGURE 12. Ferrule M22249/19-7. (18)

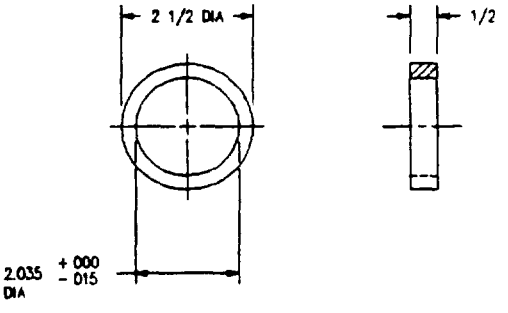


FIGURE 13 Grommet M22249/19-6. (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

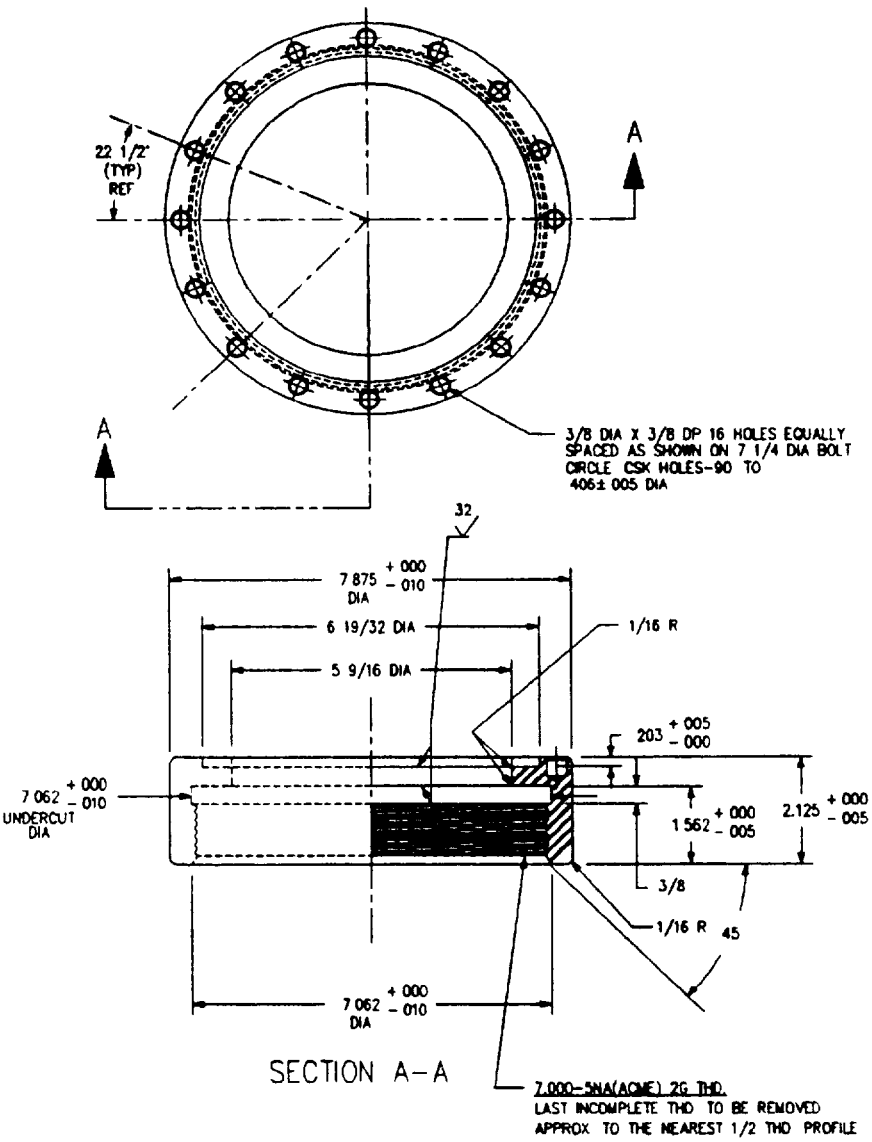


FIGURE 14 Coupling nut M22249/19-2 (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

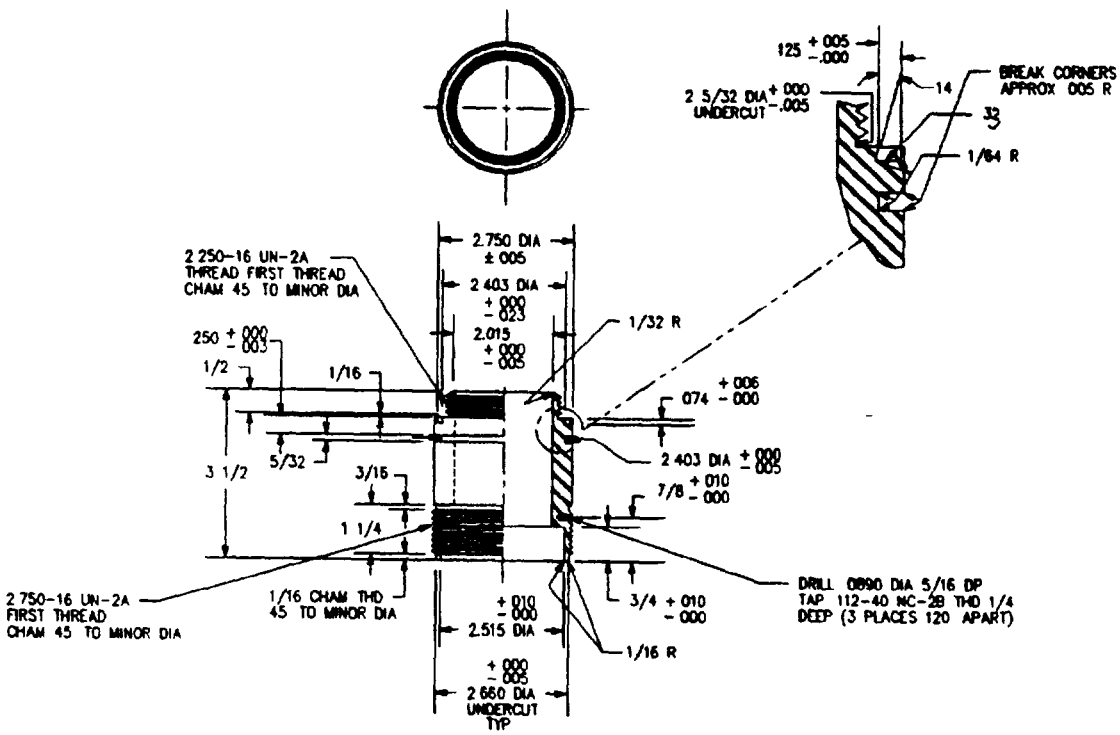


FIGURE 15. Cable stuffing tube M22249/19-4. (14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 175-pin, compartment side			Figure 1
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 3
03	Cover plate	1	CRES/Class 316 QQ-S-763	Figure 9
04	O-ring	1	MS28775-231	
05	Nut, coupling	1	Manganese bronze, Class A QQ-B-728	Figure 14
06	Washer, thrust	1	CRES/Class 316 QQ-S-766	Figure 8
07	Retaining ring, coupling nut	1	Spirolox RST-550 (or equal)	
08	Locking clip, coupling nut	1	Beryllium copper, QQ-C-533[4]	Figure 4
09	Screw, locking clip	1	M22249/4-15	
10	Insert assembly	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 2
11	O-ring	1	MS28775-241	
12	Retaining ring, insert assembly	1	Phosphor bronze QQ-B-750	Figure 6
13	Cover, protective	1	Aluminum casting material alloy A380, 413, or 384 of QQ-A-591	Figure 5
14	Cable stuffing tube	1	CRES/Class 316 QQ-S-763	Figure 15
15	Retaining clip, cable stuffing tube	1	CRES/Class 316 QQ-S-763	Figure 7
16	O-ring	1	MS28775-142	
17	Grommet, cable	1	Silicone rubber, Class 2b ZZ-R-765, Shore durometer hardness 40±5	Figure 13
18	Ferrule	1	Polyamide plastic/ L-P-410	Figure 12
19	End bell	1	CRES/Class 316 QQ-S-763	Figure 11
20	Screw, .112-40NC-2Ax1/4	1	Nylok M33CRB440-4P (or equal)	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
21	Clamp, cable	2	CRES/Class 316 QQ-S-763	Figure 10
22	Bolt, .375-16NC-2Ax1 7/8	2	CRES/Class 302 to 305 QQ-S-763	
23	Nut, .375-16NC-2B	2	Nylok E6CR616-P (or equal)	Hex head
24	Cover, protective	1	Polyethylene, COML	
25	Screw, .190-32NF-2Ax7/16	3	Nylok M32CRB1032-7P (or equal)	For plug body cover plate
26	Screw, .138-32NC-2Ax5/16	2	Nylok M33CRB632-5P (or equal)	For stuffing tube retaining ring
27[5]	Rope, wire, assembly	1		

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.
[4]Coated with polychloroprene (Neoprene) commercial grade to a 0.003 inch thickness, and a durometer hardness of 60 to 70.
[5]Item 27, only when required by acquisition document

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N-278-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.