
INCH-POUND
MIL-C-22249/1A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/1(SHIPS)
19 April 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 15-PIN, COMPARTMENT SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

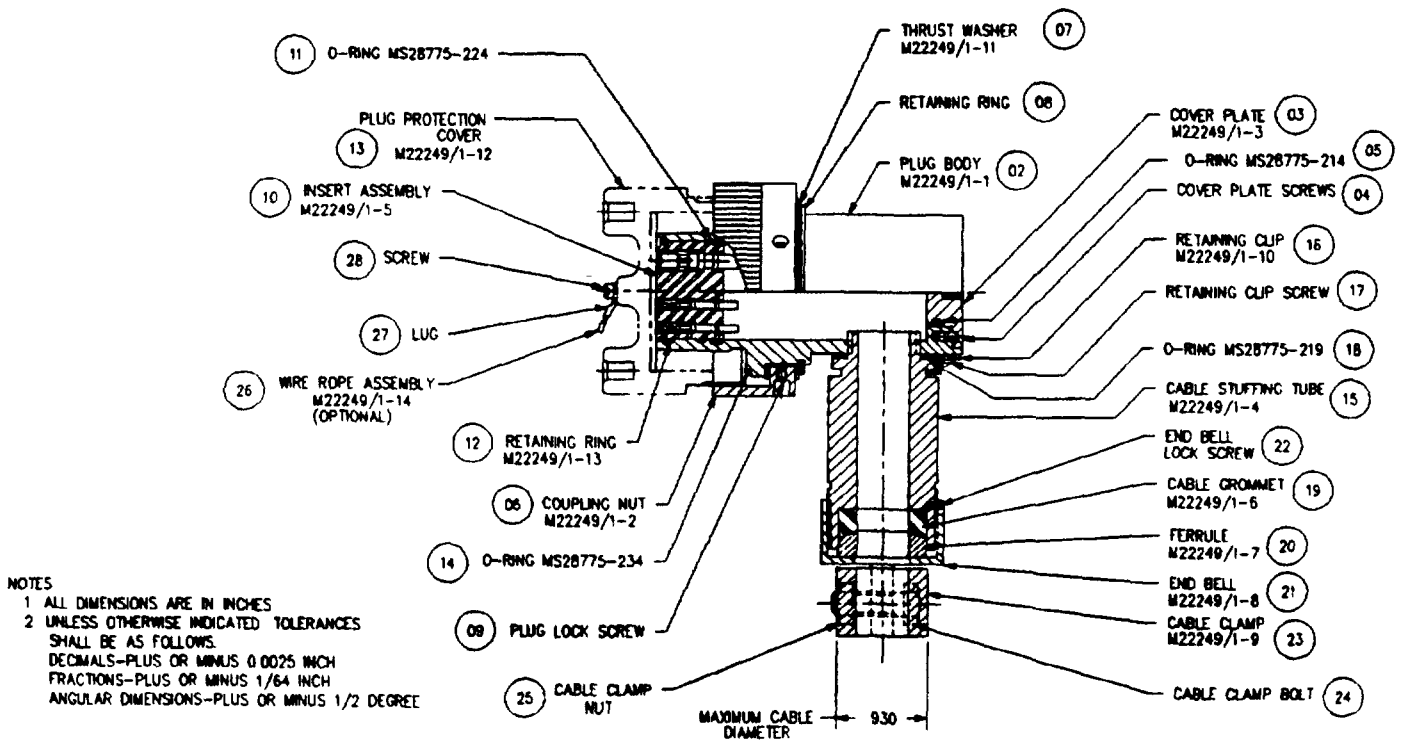

NOTES
1 ALL DIMENSIONS ARE IN INCHES
2 UNLESS OTHERWISE INDICATED TOLERANCES SHALL BE AS FOLLOWS.
DECIMALS-PLUS OR MINUS 0.0025 INCH
FRACTIONS-PLUS OR MINUS 1/64 INCH
ANGULAR DIMENSIONS-PLUS OR MINUS 1/2 DEGREE

FIGURE 1. Plug assembly, 15-pin, compartment side (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

CONTACT SIZE	CONTACT NO	REAR END ACCOMMODATES
16	1 THRU 12	#16 SIZE CONDUCTOR CRIMP TERMINAL
4	13 THRU 15	3, #8 SIZE CONDUCTORS SOLDER POT TERMINAL

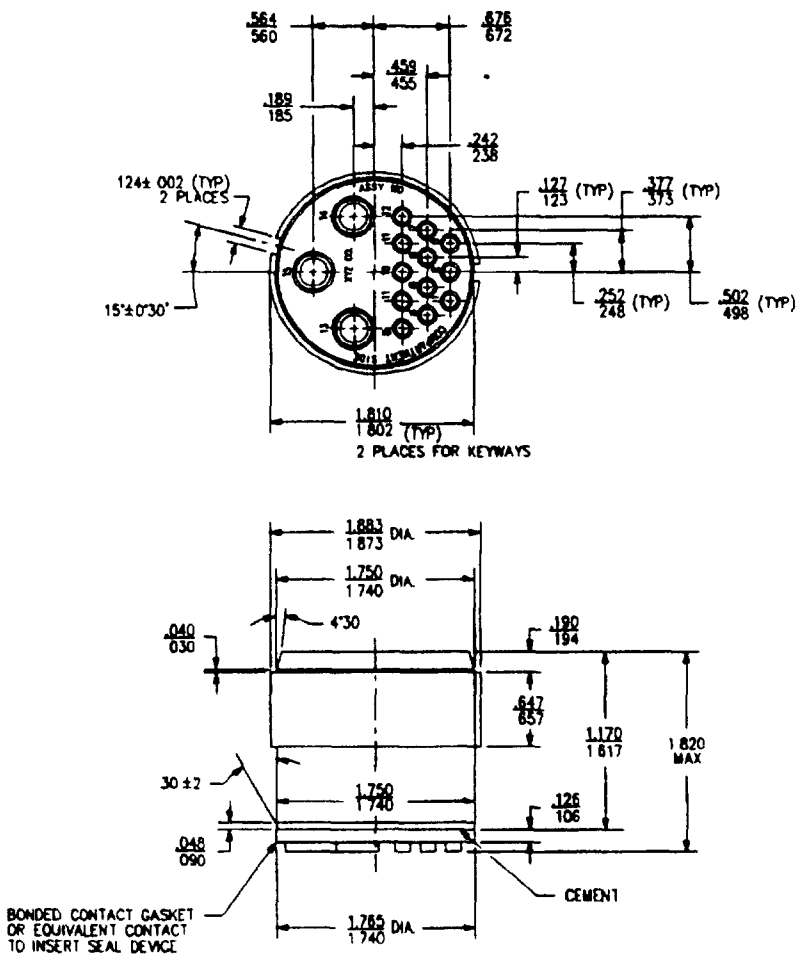


FIGURE 2 Insert assembly, compartment side, 15 contact M22249/1-5. (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

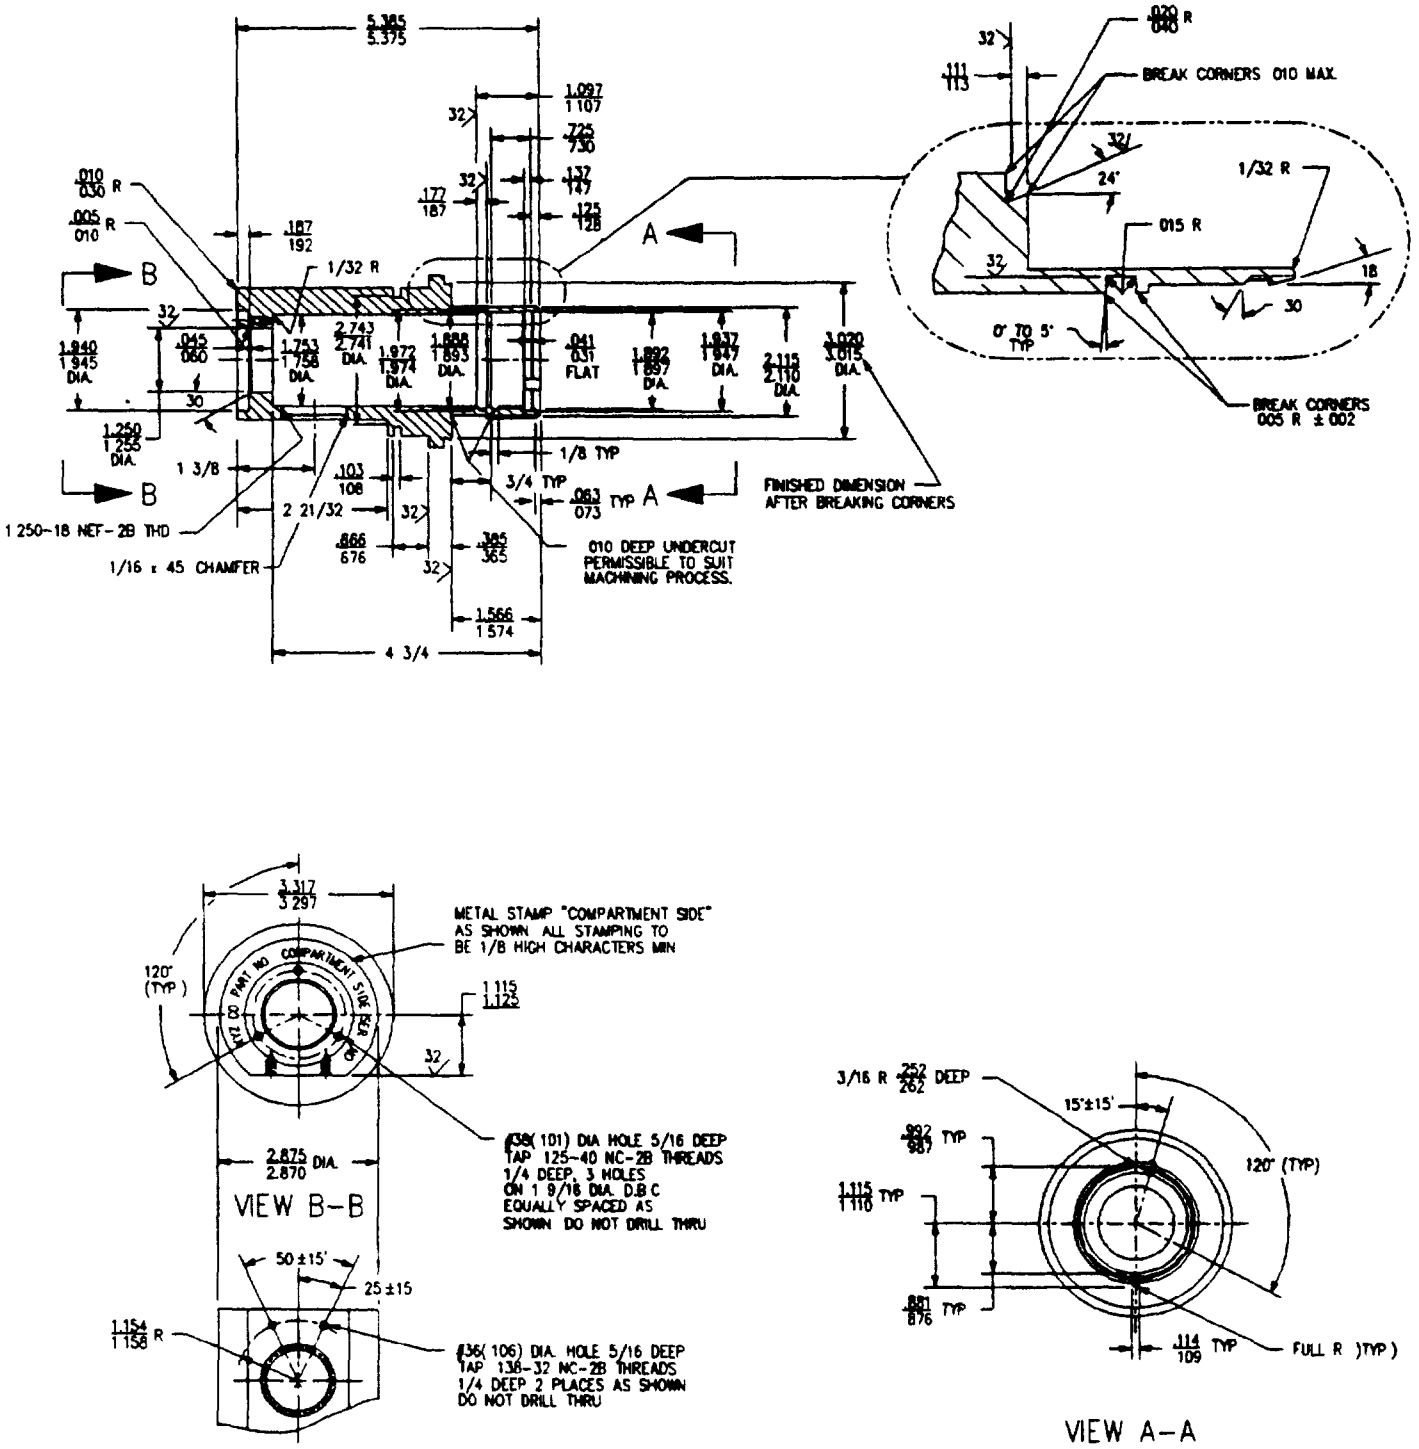


FIGURE 3. Plug body M22249/1-1. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

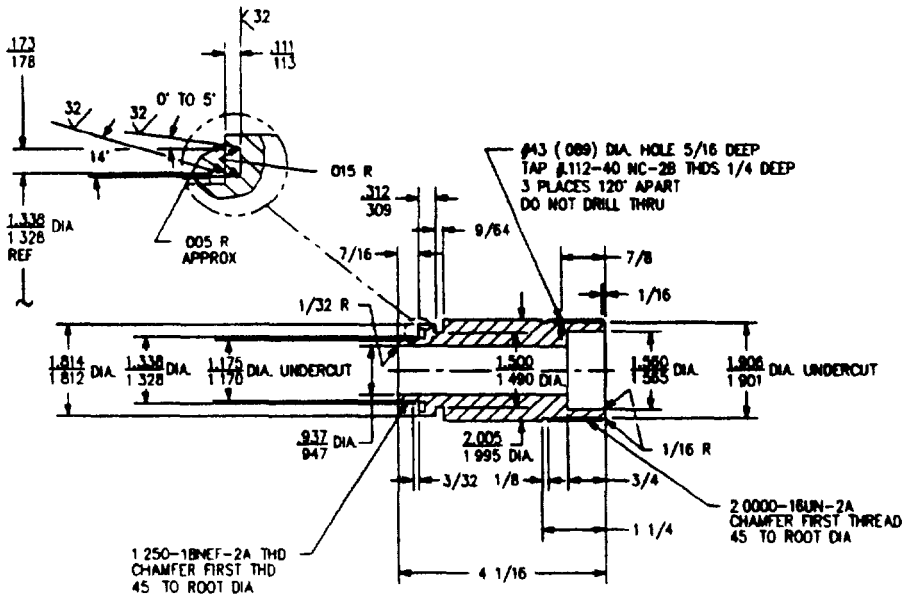


FIGURE 4 Cable stuffing tube M22249/1-4. (15)

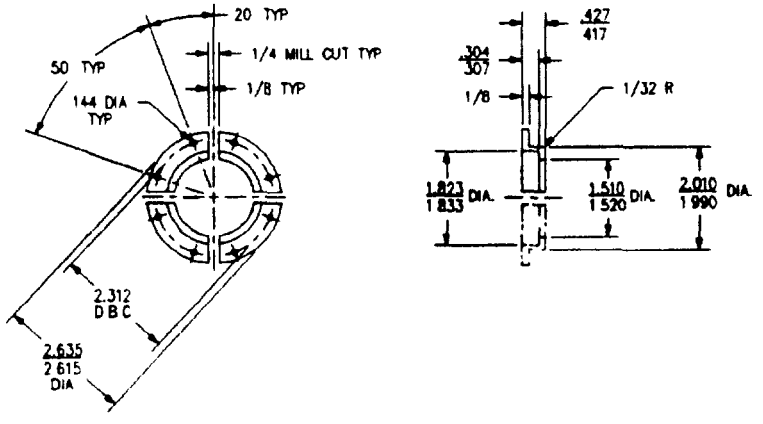


FIGURE 5. Retaining clip M22249/1-10. (16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

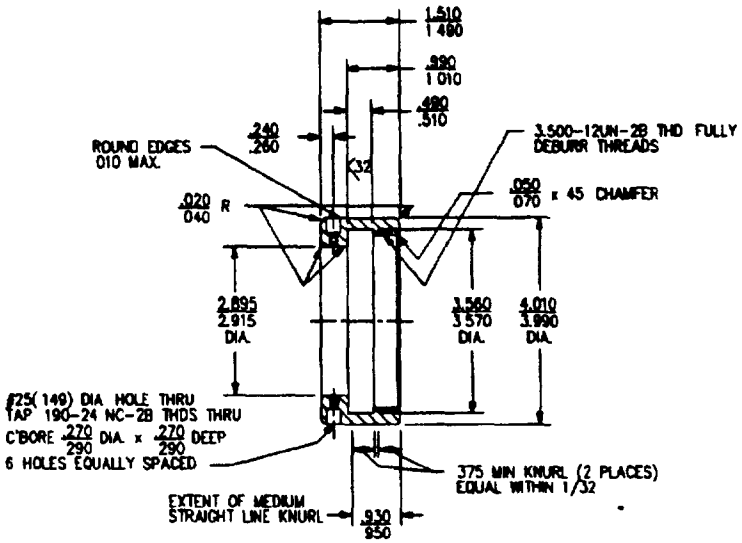


FIGURE 6. Coupling nut M22249/1-2. (06)

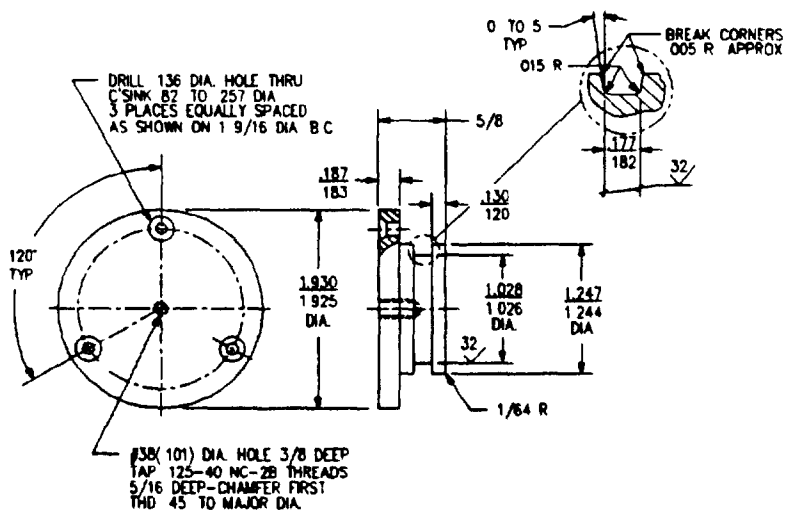


FIGURE 7. Cover plate M22249/1-3. (03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

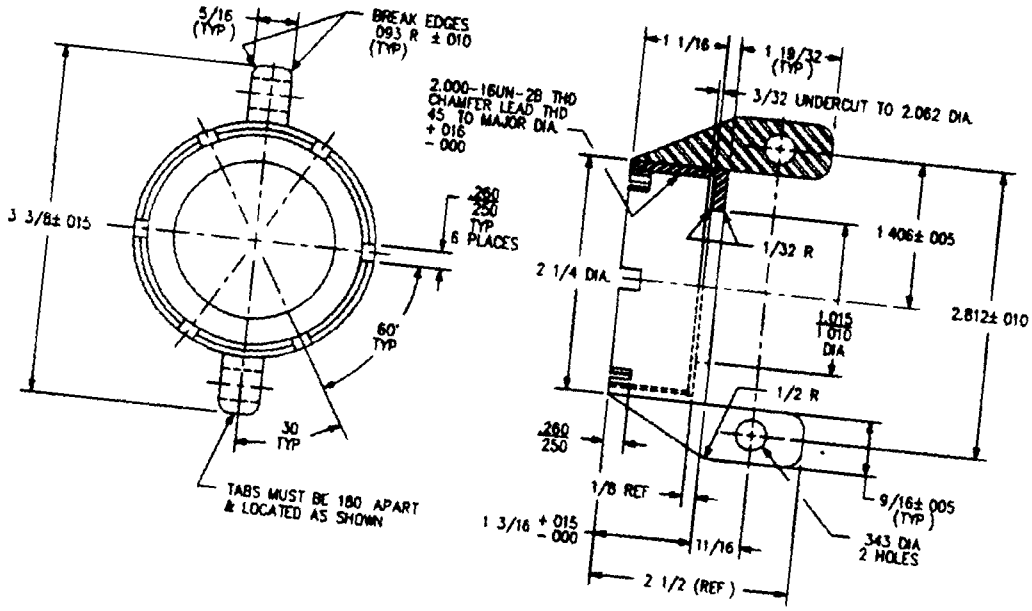


FIGURE 8. End bell M22249/1-8. (21)

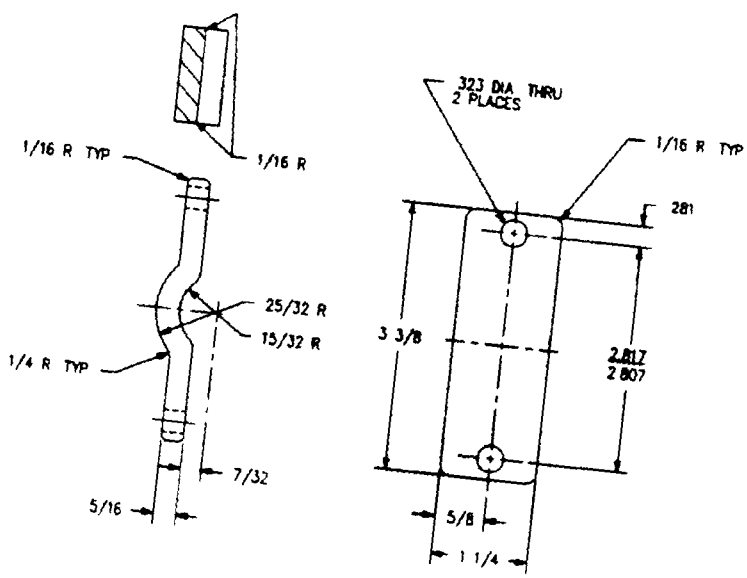


FIGURE 9. Cable clamp M22249/1-9. (23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

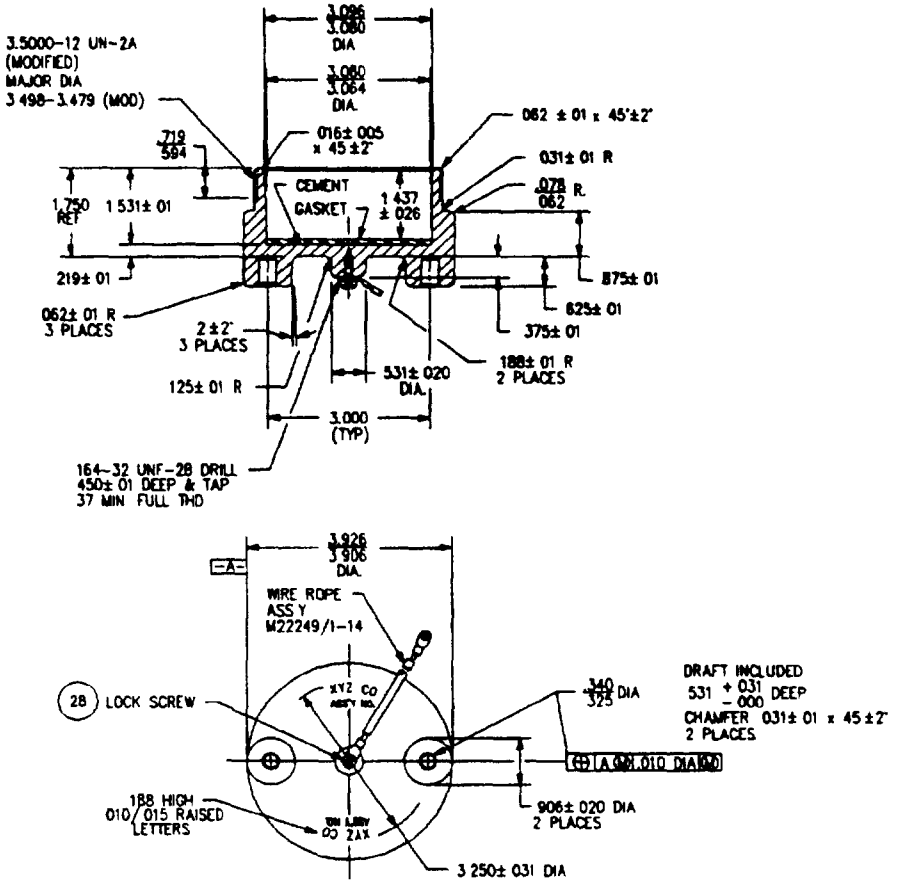


FIGURE 10 Protective cover M22249/1-12. (13)


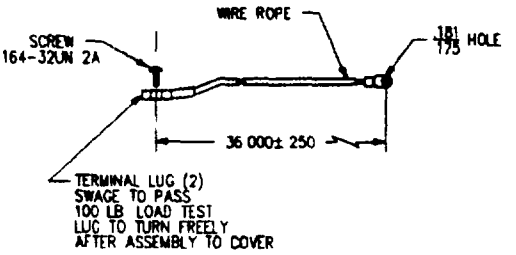



FIGURE 11. Wire rope asssembly M22249/1-14. (26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

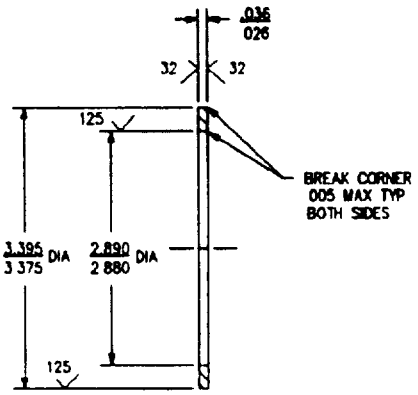


07

FIGURE 12 Thrust washer M222249/1-11.



20


FIGURE 13. Ferrule M22249/1-7



NOTE
1 REMOVE ALL FLASH WITHOUT CUTTING INTO PART

19

FIGURE 14. Cable grommet M22249/1-6.

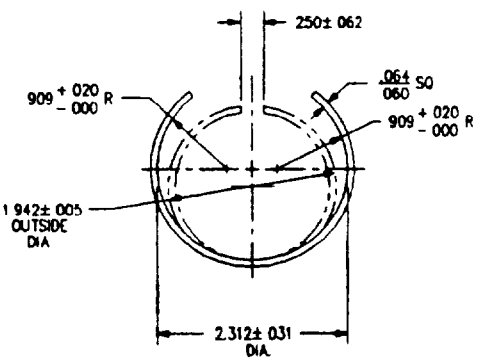

NOTE
1 RING MUST ASSUME 1.942± 005 OUTSIDE DIA AFTER ASSEMBLY IN PLUG
2 SURFACE OF RING TO BE FLAT WITHIN .008

12

FIGURE 15. Retaining ring M22249/1-13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug Assembly, 15-Pin compartment side			Figure 1
02	Plug body	1	CRES/Class 316 of QQ-S-763	Figure 3
03	Cover plate	1	CRES/Class 316 of QQ-S-763	Figure 7
04	Screw, .125-40NC-2Ax1/4	3	Nylok M32CRB540-4P (or equal)	Figure 1
05	O-ring	1	MS28775-214	Figure 1
06	Nut, coupling	1	Manganese bronze, Class A of QQ-B-728	Figure 6
07	Washer, thrust	1	CRES/Class 316 of QQ-S-766	Figure 12
08	Retaining ring, coupling nut	1	Spirolox RST-287 (or equal)	
09	Screw, .190-24NC-2Ax5/16		Nylok M33CRB1024-5P (or equal)	
10	Insert assembly	1	Diallyl Phthalate Type GDI-30 of MIL-M-14	Figure 2
11	O-ring	1	MS28775-224	Figure 1
12	Retaining ring, insert assembly	1	Phosphor bronze QQ-B-750	Figure 15
13	Cover, protective	1	Aluminum alloy material, alloys A380, 413, or 384 of QQ-A-591	Figure 10
14	O-ring	1	MS28775-234 7x7 ST. STL.	Figure 1
15	Cable stuffing tube	1	CRES/CLASS 316 of QQ-S-763	Figure 4
16	Retaining clip, cable stuffing tube	1	CRES/CLASS 316 of QQ-S-763	Figure 5
17	Screw, .138-32NC-2Ax1/4	2	Nylok M33-CRB632-4P (or equal)	
18	O-ring	1	MS28775-219	Figure 1
19	Grommet, cable	1	Silicone rubber, Class 2b of ZZ-R-765, Shore durometer hardness 40 ± 5	Figure 14
20	Ferrule	1	Polyamide plastic/ L-P-410	Figure 13

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
21	End bell	1	CRES/Class 316 of QQ-S410	Figure 8
22	Screw, .112-40NC-2Ax1/4	3	Nylok M33CRB440-4P (or equal)	Figure 1
23	Clamp cable	2	CRES/Class 316 of QQ-S-766	Figure 9
24	Bolt, .3125-18NC-2Ax1 1/2	2	CRES/Class 302 to 305 of QQ-S-763	Figure 1
25	Nut, .312-18NC-2B (or equal)	2	Nylok E6CR518P	
26[4]	Rope, wire assembly (consists of 26, 27, 28)	1	MIL-W-83420 Type 1 Comp. B	Figure 11
27[4]	Lug, terminal, swage	2	CRES/Class 304 or 305 QQ-S-763	
28[4]	Screw, .164-324NF-2A Self-locking	1	CRES/CLASS 302 to 305 Length as required QQ-S-763	Figure 1

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.
[4]Items 26, 27, and 28, only when required by acquisition document.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N278-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.