INCH-POUND
MIL-C-22249/2A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/2(SHIPS)
19 April 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 15-PIN, MISSILE SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

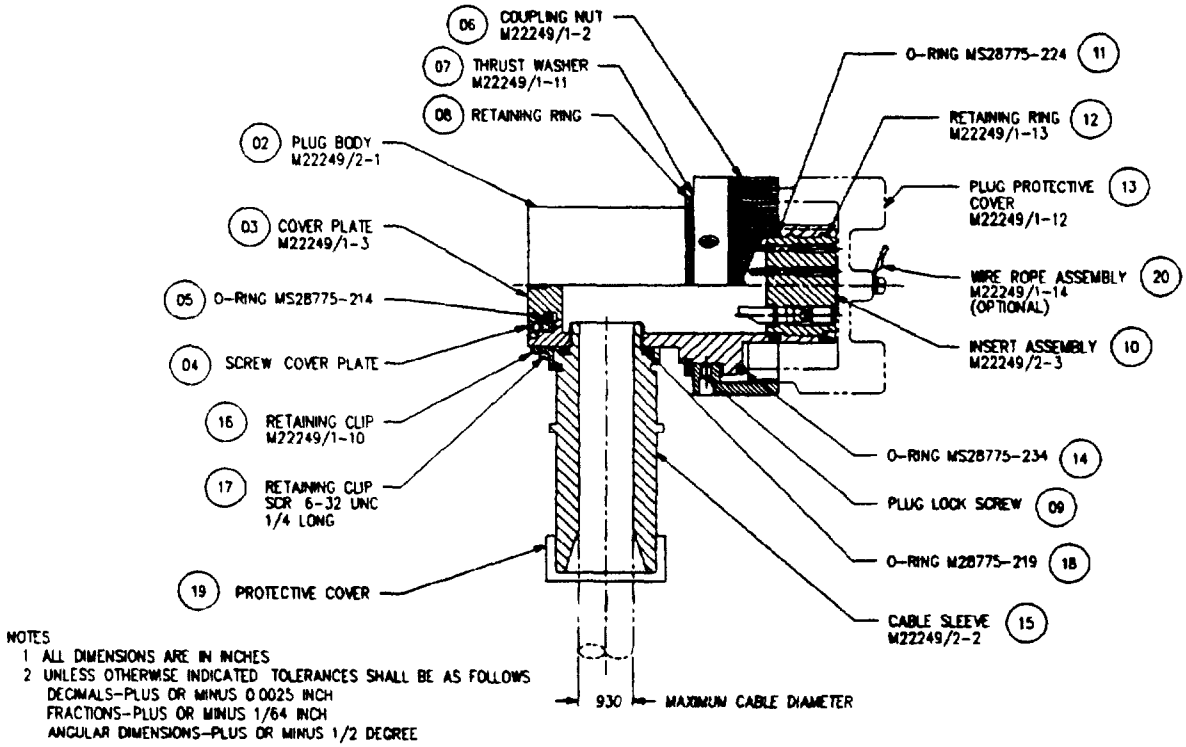


FIGURE 1. Plug assembly, 15-pin missile side (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

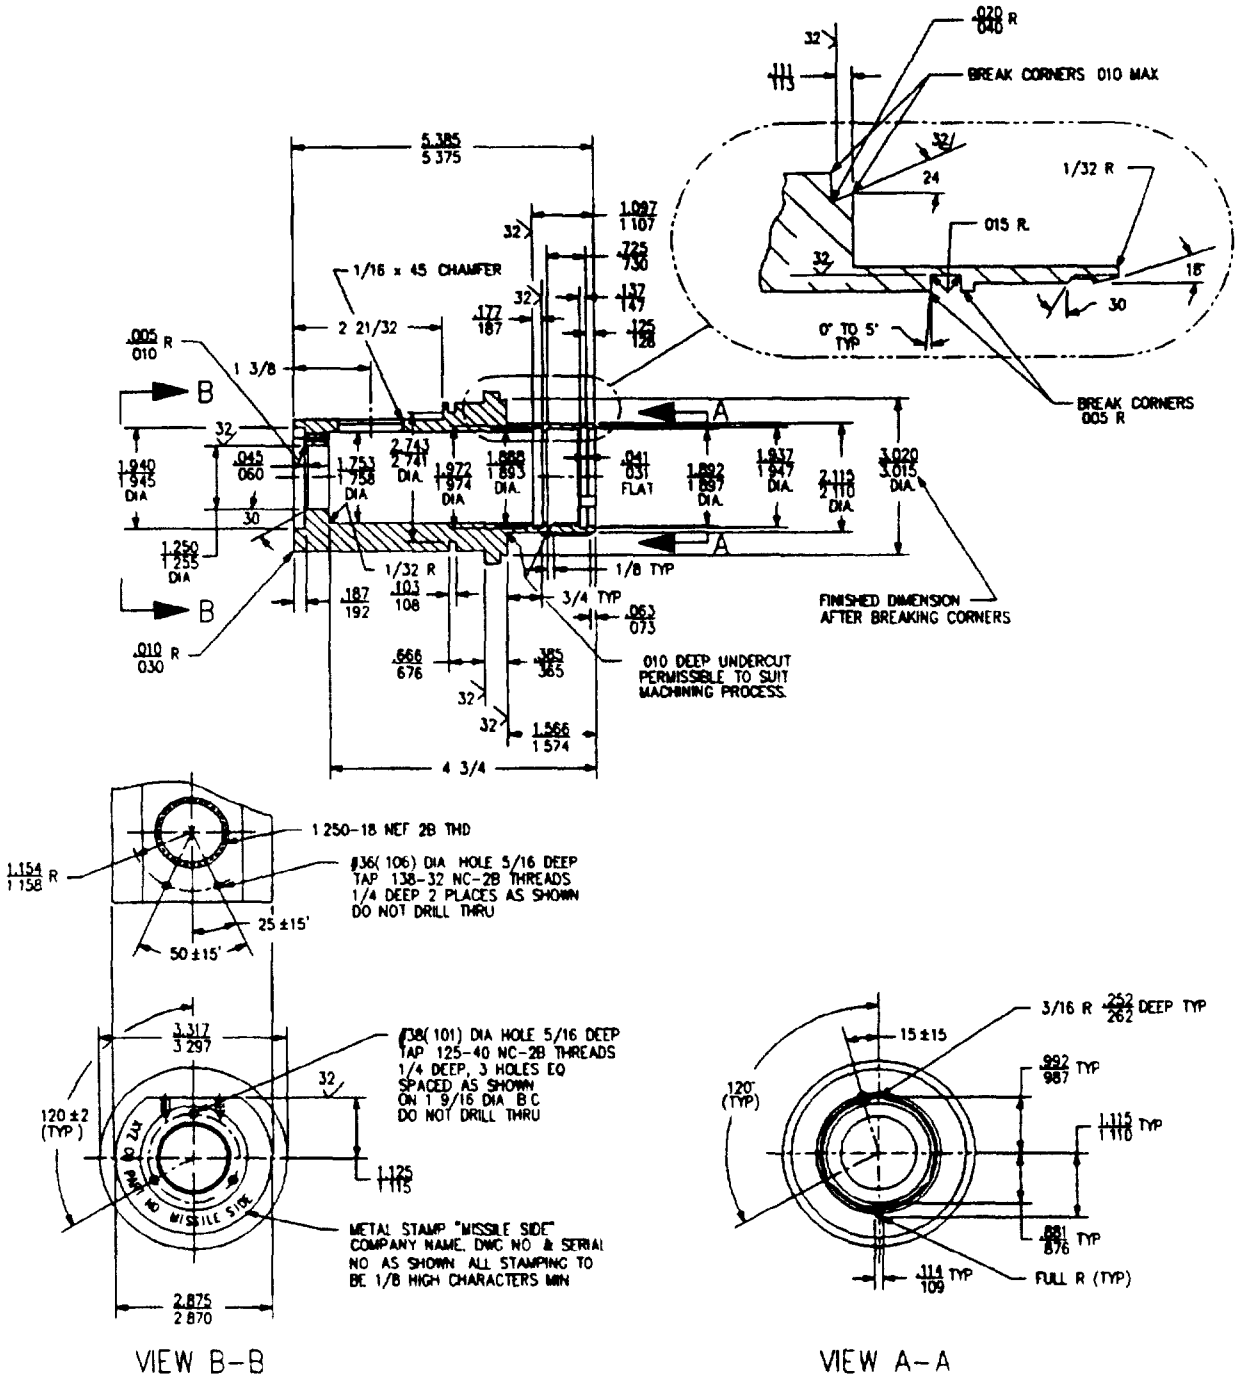


FIGURE 2 Plug body M22249/2-1. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

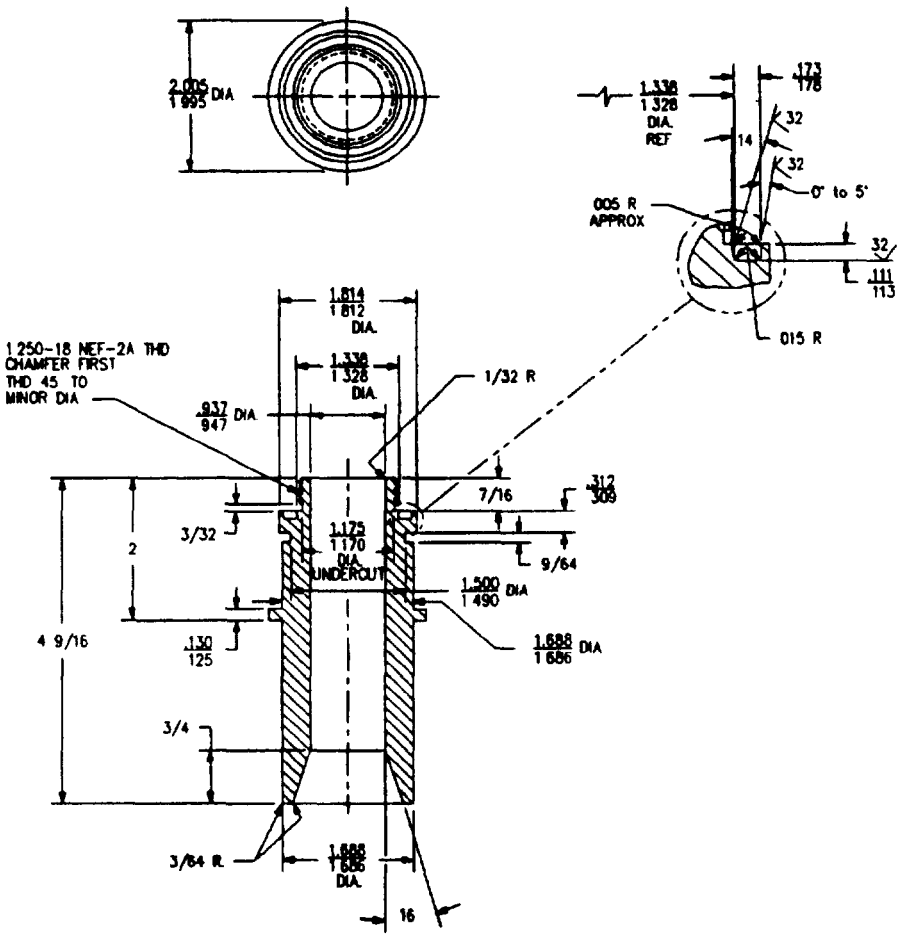


FIGURE 3 Cable sleeve M22249/2-2 (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

CONTACT SIZE	CONTACT NO	REAR END ACCOMMODATES
16	1 THRU 12	#16 SIZE CONDUCTOR CRIMP TERMINAL
4	13 THRU 15	3, #8 SIZE CONDUCTORS SOLDER POT TERMINAL

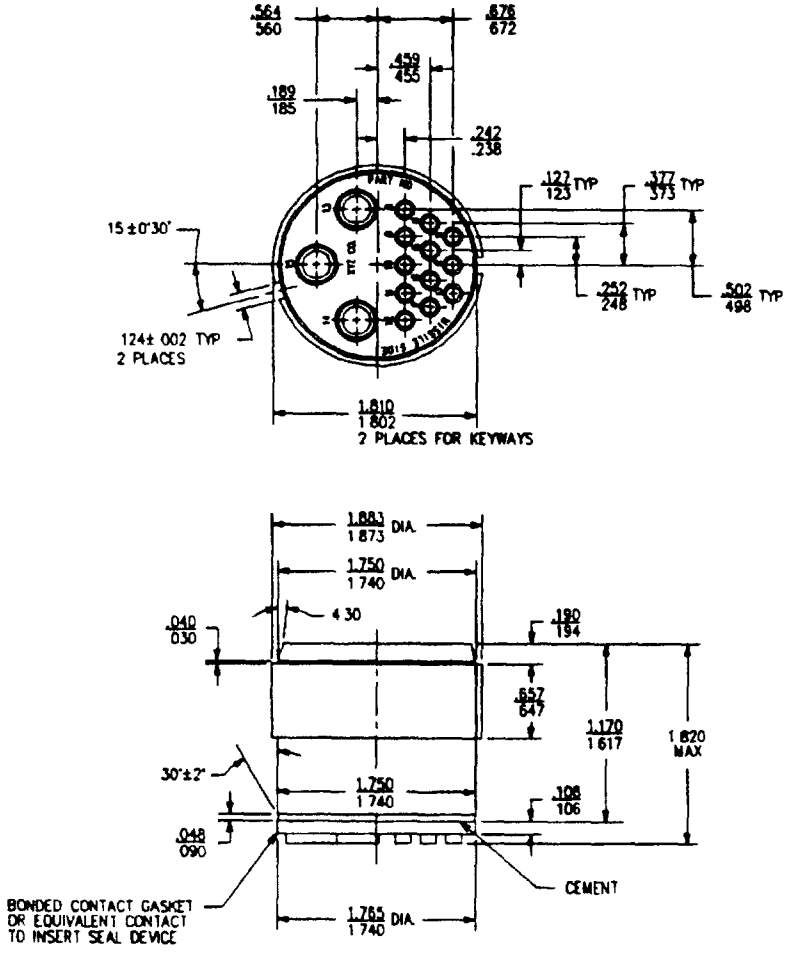


FIGURE 4 Insert assembly missile side - 15 contact M22249/2-3 (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Parts List.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 15-pin missile side			Figure 1
02	Plug body	1	CRES/Class 316 of QQ-S-763	Figure 2
03	Cover plate	1	M22249/1-3	Figure 1
04	Screw,.125-40NC-2Ax1/4	3	Nylok M32CRB540-49 (or equal)	Figure 1
05	O-ring	1	MS28775-214	Figure 1
06	Nut, coupling	1	M22249/1-2	Figure 1
07	Washer, thrust	1	M22249/1-11	Figure 1
08	Retaining ring, Coupling nut	1	Spirolox Ret-287 (or equal)	Figure 1
09	Screw,.190-24NC-2Ax5/16	2	Nylok M33CRB1024-5P (or equal)	Figure 1
10	Insert assembly	1	Diallyl Phthalate Type GDI-30 of MIL-M-14	Figure 4
11	O-ring	1	MS28775-224	Figure 1
12	Retaining ring, insert assembly	1	M22249/1-13	Figure 1
13	Cover, watertight	1	M22249/1-12	Figure 1
14	O-ring	1	MS28775-234	Figure 1
15	Cable sleeve	1	CRES/Class 316 of QQ-S-763	Figure 3
16	Retaining clip Cable sleeve	1	M22249/1-10	Figure 1
17	Screw,.138-32NC-2Ax1/4	2	Nylok M33-CRB632-4P (or equal)	
18	O-ring	1	MS28775-219	Figure 1
19	Cover, protective	1	Polyethylene	Figure 1
20[4]	Wire rope assembly	1	M22249/1-14	

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in Remarks column for part numbers and dimensions
[3]Quantity is for one complete assembly of each size.
[4]Item 20 - only when required by acquisition document.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy-SH
(Project 5935-N278-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:34Z
Check the source to verify that this is the current version before use.