
MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 72-PIN, COMPARTMENT SIDE

(A) This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the Connector Sets described herein shall consist of this document and the latest issue of MIL-C-22249(SH).

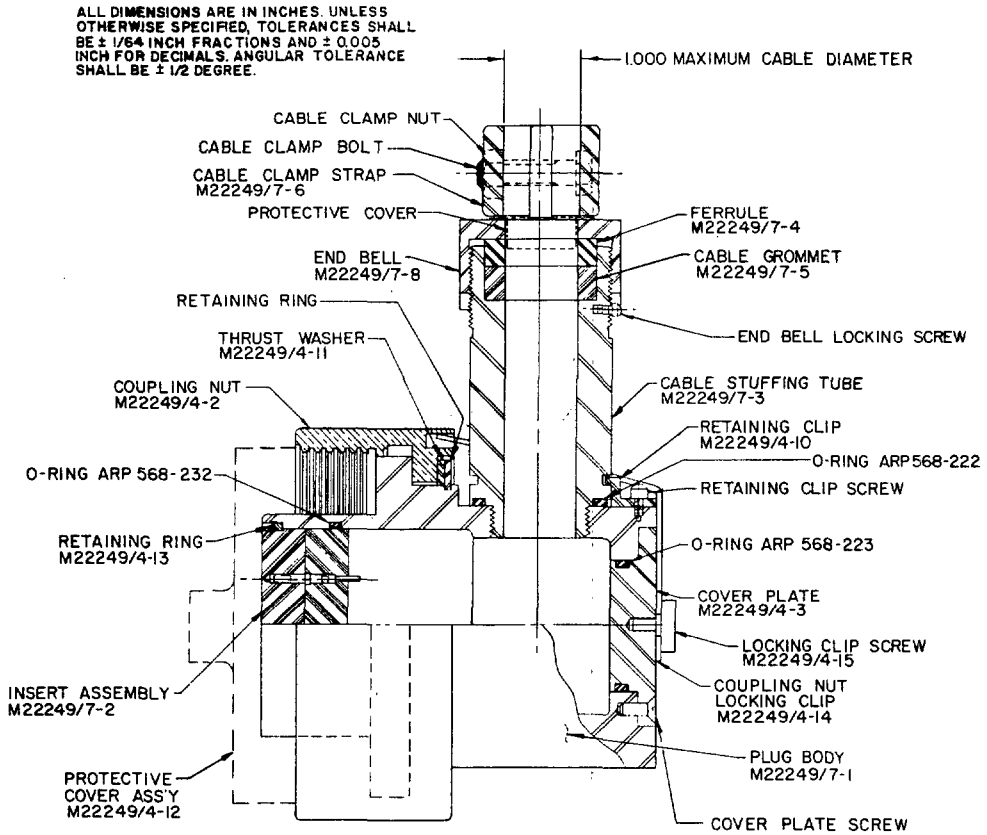


PLUG ORIENTATION: 3 O'CLOCK

(A) DENOTES CHANGES

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

PLUG BODY
M22249/7-1

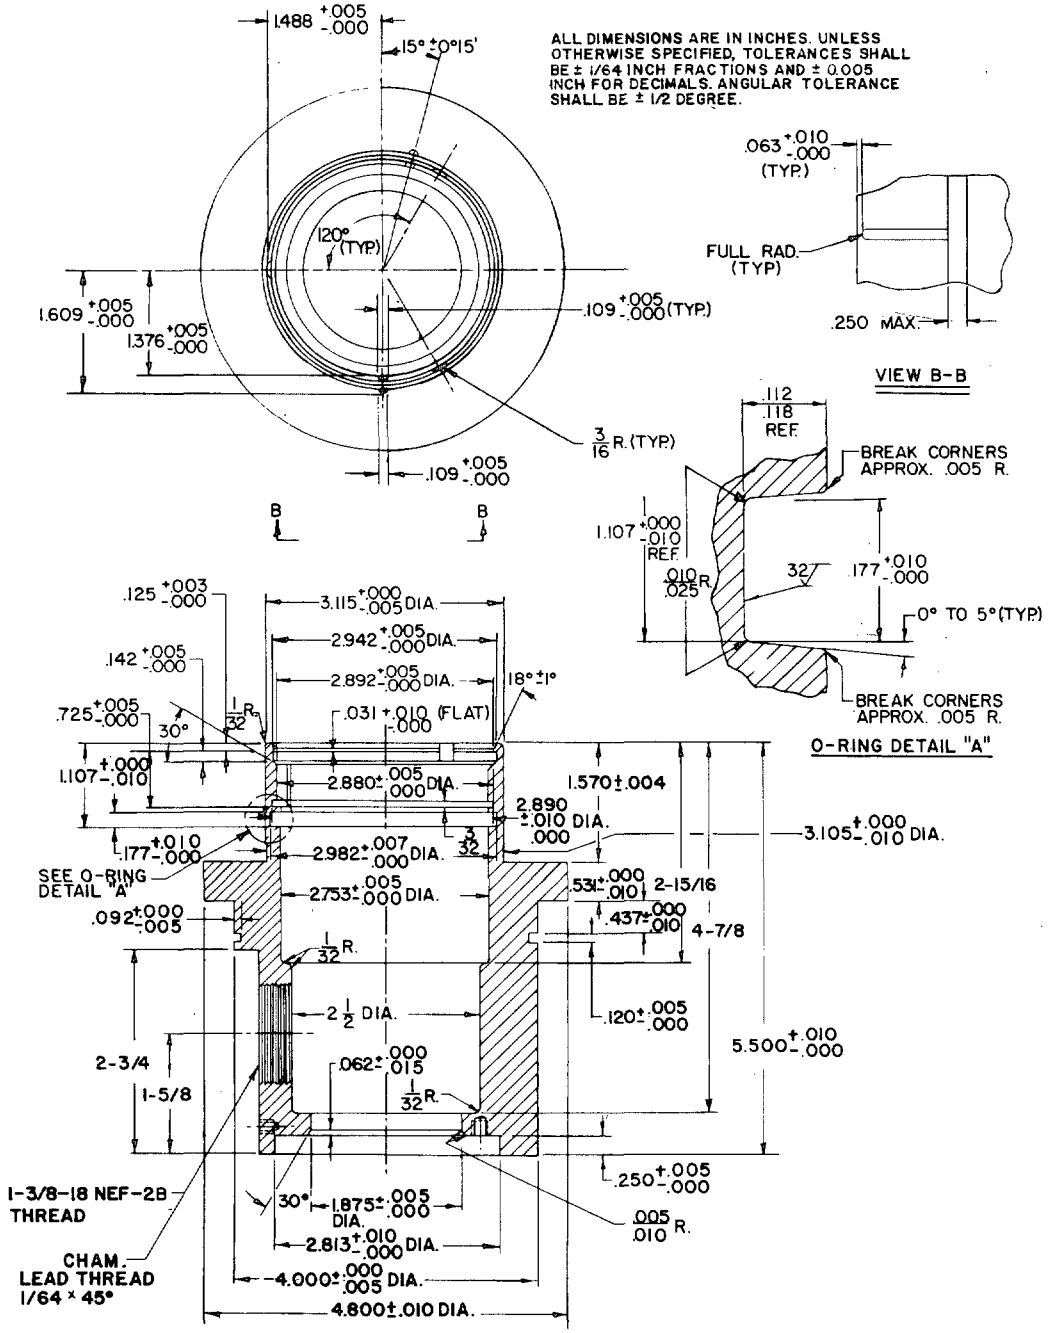


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

PLUG BODY
END VIEW
M22249/7-1

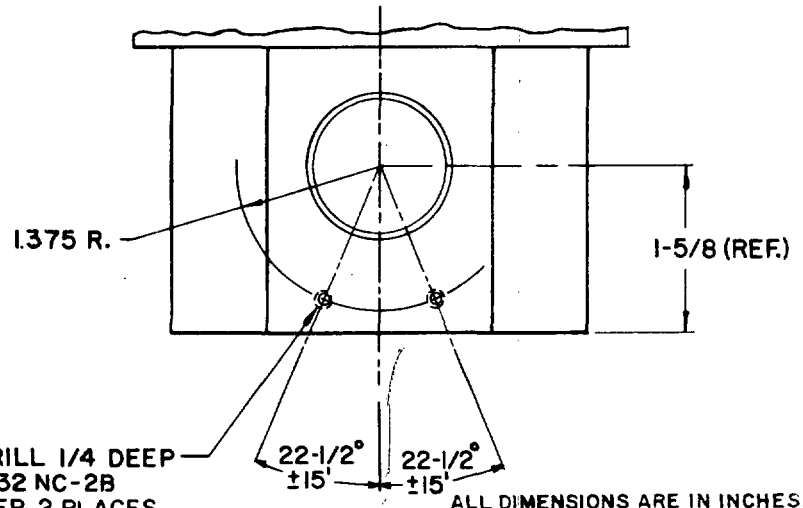


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

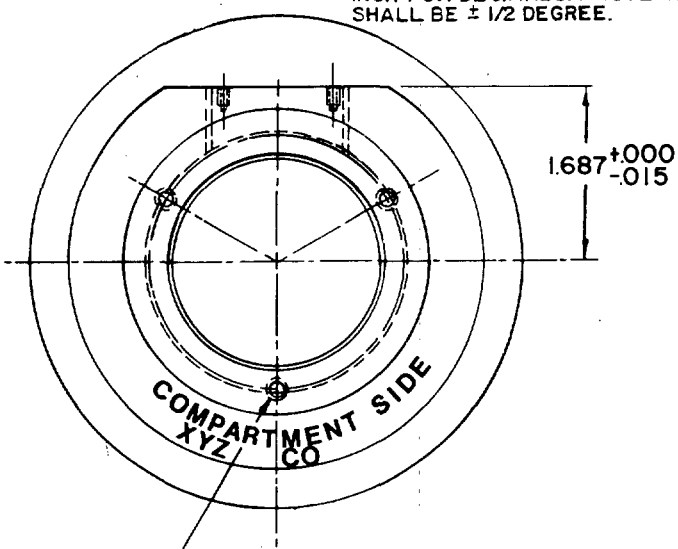

DRILL #21 (.159 DIA) .250 $^{+.005}_{-.000}$ DEEP
BOTTOM TAP #10-32 NF-2B THREADS 3/16 DEEP
3 HOLES EQUALLY SPACED AS SHOWN ON A
2-11/32 D.B.C.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

INSERT ASSEMBLY 72-PIN – COMPARTMENT SIDE
M22249/7-2

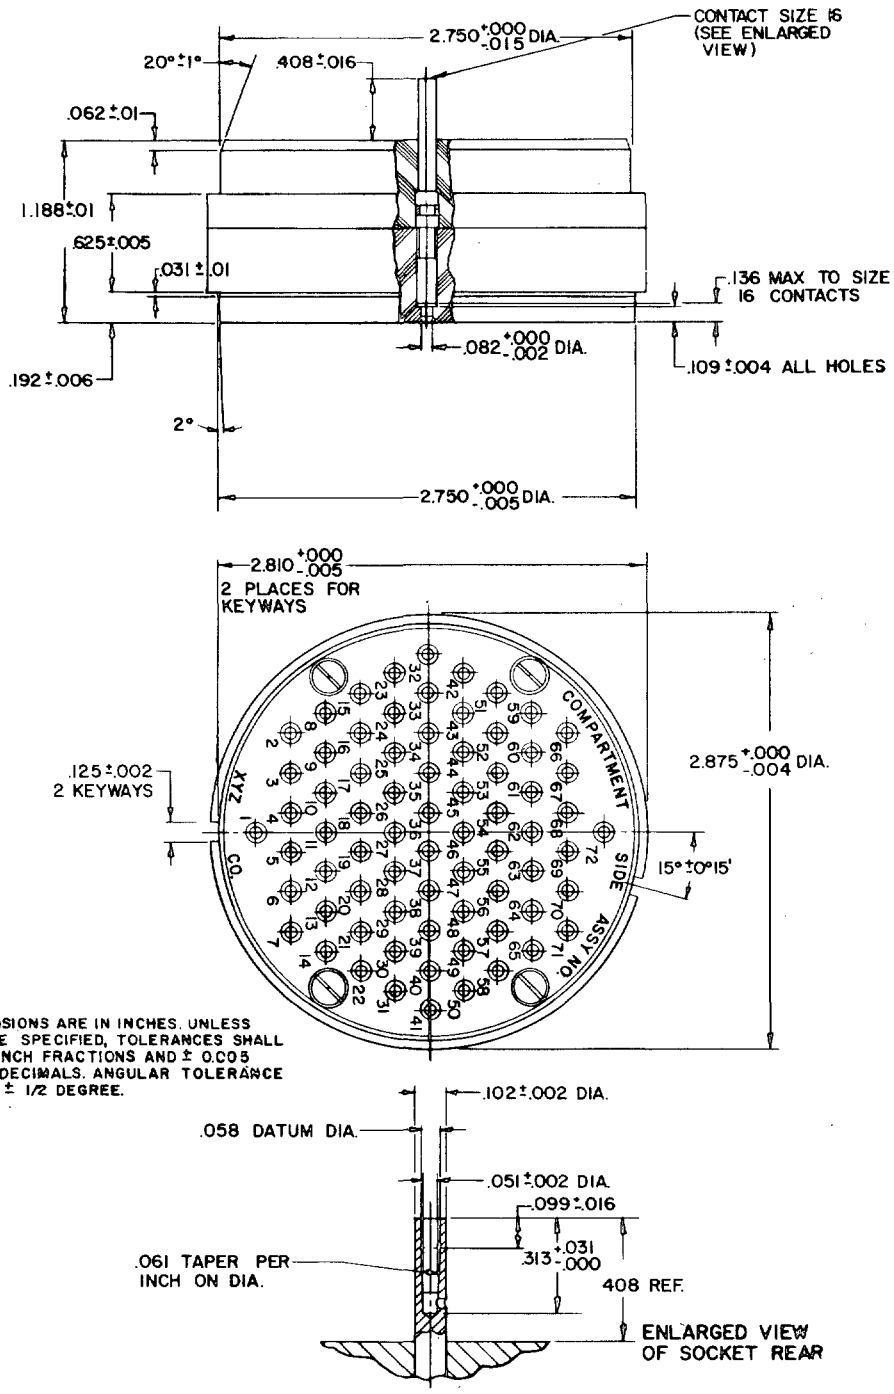

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.


CABLE STUFFING TUBE
M22249/7-3

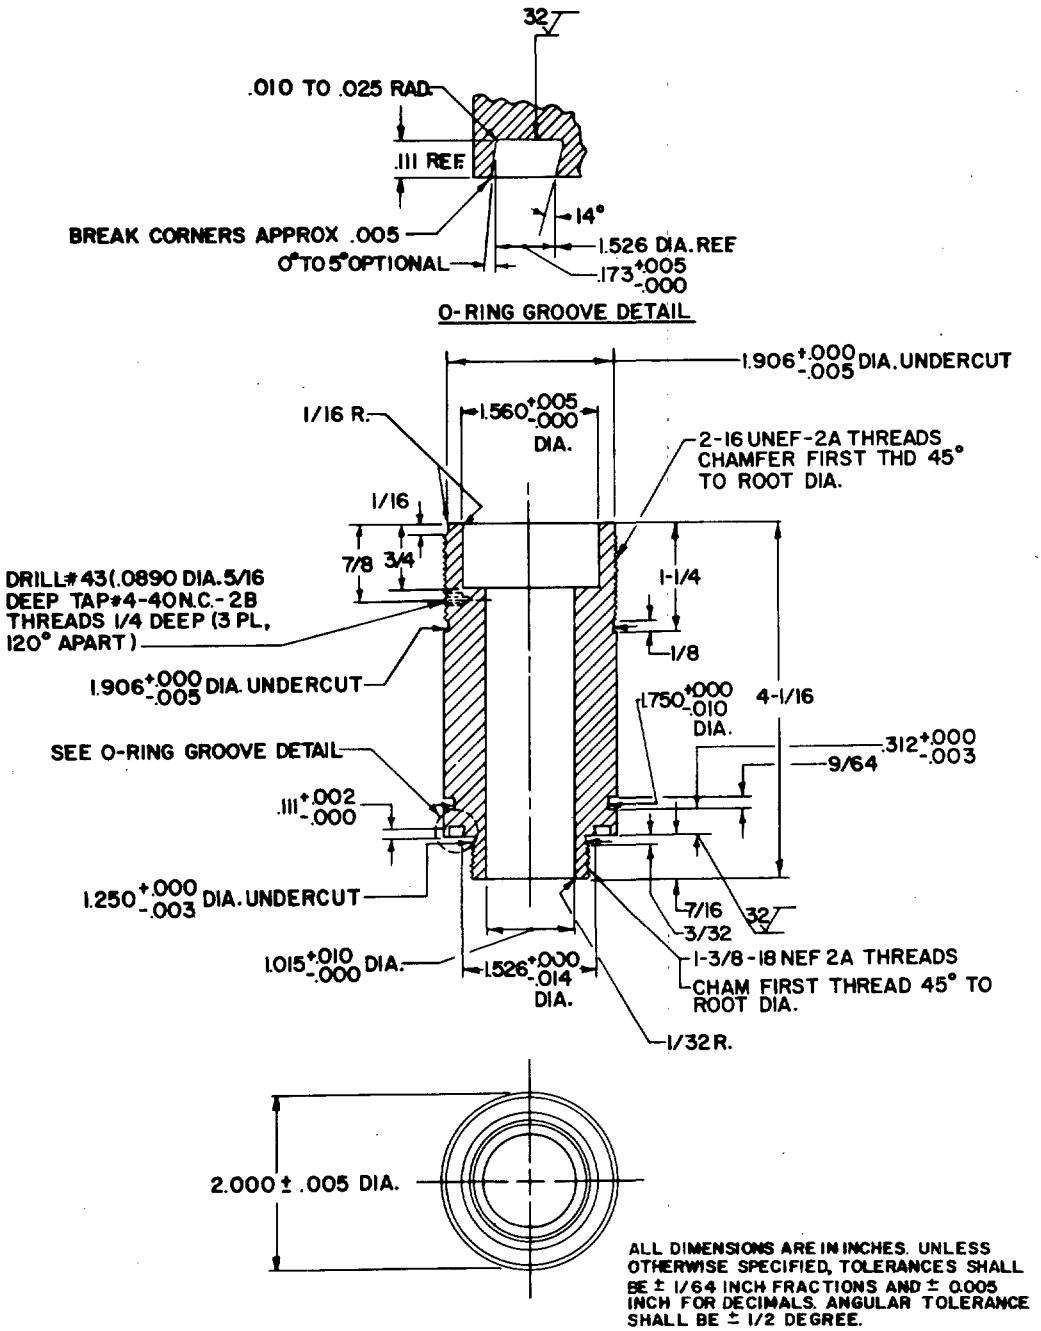


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.


FERRULE
M22249/7-4




CABLE GROMMET
M22249/7-5



CABLE CLAMP
M22249/7-6




ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ±1/64 INCH FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ±1/2 DEGREE.

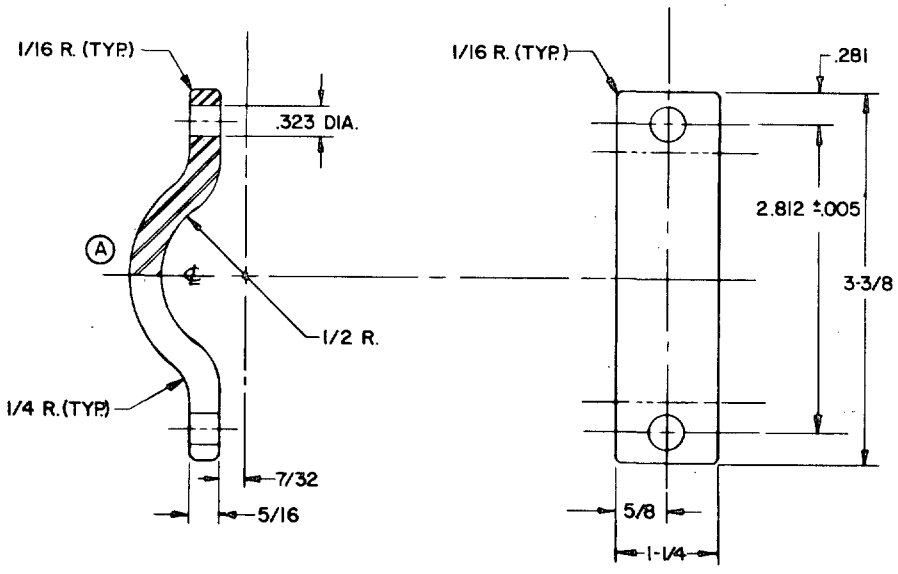


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

END BELL
M22249/7-8

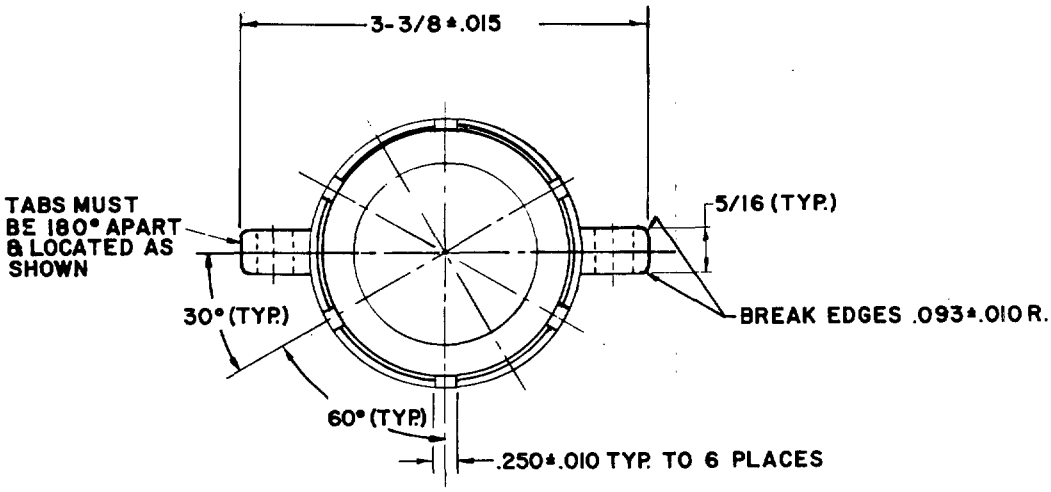

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

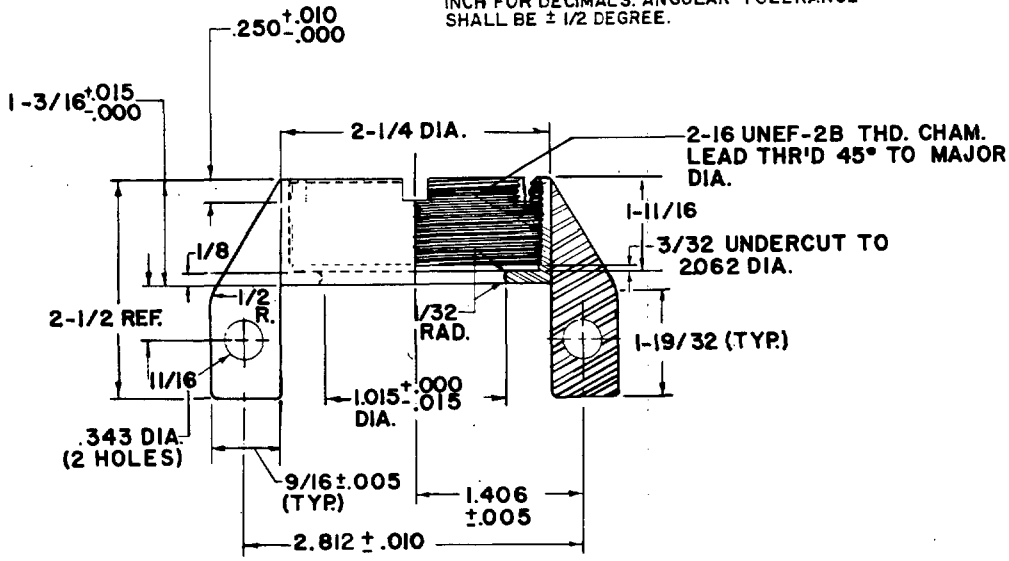

Preparing Activity:
Navy-SH
(Project 5935-N069-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.