DECLASSIFIED
NAVWEPS LTR. [illegible]
STD. 6-29-62
NAVSHIPYD PHILA. PA.

MILITARY SPECIFICATION

INDICATOR, AZIMUTH-ELEVATION-RANGE IP-446/APG-53A

This amendment forms a part of Military Specification MIL-I-22231(AER) dated 30 October 1959 and has been approved by the Bureau of Naval Weapons, Department of the Navy.

By this amendment basic MIL-I-22231(AER) is changed to MIL-I-22231(WEP) and throughout the specification Bureau of Aeronautics shall be changed to Bureau of Naval Weapons.

Page 1, paragraph 2.1: Delete MIL-P-7788.

Page 2, paragraph 2.1: Delete MIL-C-6781, MS25245 and MS90659.

Page 2, paragraph 2.1: Change MIL-L-006805 to MIL-L-6805.

Page 2, paragraph 2.1: Add

"DRAWINGS"

"Bureau of Naval Weapons"
"58A30ASK1 Indicator, Azimuth-Elevation-Range IP446/APG-53A List of Drawings"

Page 4, paragraph 3.2.1: Add

"The indicator shall be in accordance with the detail requirements, performance characteristics, tolerances, etc., as specified on Bureau of Naval Weapons List of Drawings 58A30ASK1."

Page 5, paragraph 3.2.3: Under "Input power voltage and

"and the filament voltages and regulated d-c voltages listed in 3.3.1.5."

Page 6, paragraph 3.2.9: Delete and substitute

"3.2.9 Panel Finish - The front panel shall be finished with camouflage black lacquer color No. 37038, in accordance with Specification MIL-L-6805."

Page 7, paragraph 3.3.1.1.1: Change the first sentence to

"The range only mode shall display a horizontal line [illegible] inches long which must be centered between the 2 mile and 3 mile marks."

Page 7, paragraph 3.3.1.1.2(1): Under "Video" delete "100 ohms impedance" and substitute

"200 ohms impedance"

Page 7, paragraph 3.3.1.1.3.1: Under "Video" delete "100 ohms impedance" and substitute

"200 ohms impedance"

FSC 5841

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:30Z
Check the source to verify that this is the current version before use.

Page 8, paragraph 3.3.1.1.5: Delete "5 megacycles" and substitute

"4.5 megacycles"

Page 8, paragraph 3.3.1.2: Delete "MIL-L-006805" and substitute

"MIL-L-6805"

Page 8, paragraph 3.3.1.2: Where "No. 601" appears delete and substitute

"color No. 37875"

Page 8, paragraph 3.3.1.2: Where "No. 604" appears delete and substitute

"color No. 37038"

Page 9, paragraph 3.4.1: In the second line delete "and ±5% from -54°C" and substitute

"and ±10% from -54°C"

Page 10, paragraph 4.2.3: Delete the third sentence.

Page 11, paragraph 4.2.3.2 (k): Delete and substitute

"Remove the pulse generator from terminal B and substitute a sine wave generator. With the output voltage of the video amplifier held constant at 6 volts peak to peak, measure the input voltage as the frequency is varied between 750 cps and 4.5 mc. The gain shall be within 3 db of the mid-frequency gain throughout the frequency range from 750 cps to 4.5 mc.

Page [illegible], paragraph 4.2.3.2 (n): Delete

Figure 2: Add vertical overall dimension "5.750 ± .010".

Figure 3: Delete and substitute new figure 3.

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:30Z
Check the source to verify that this is the current version before use.


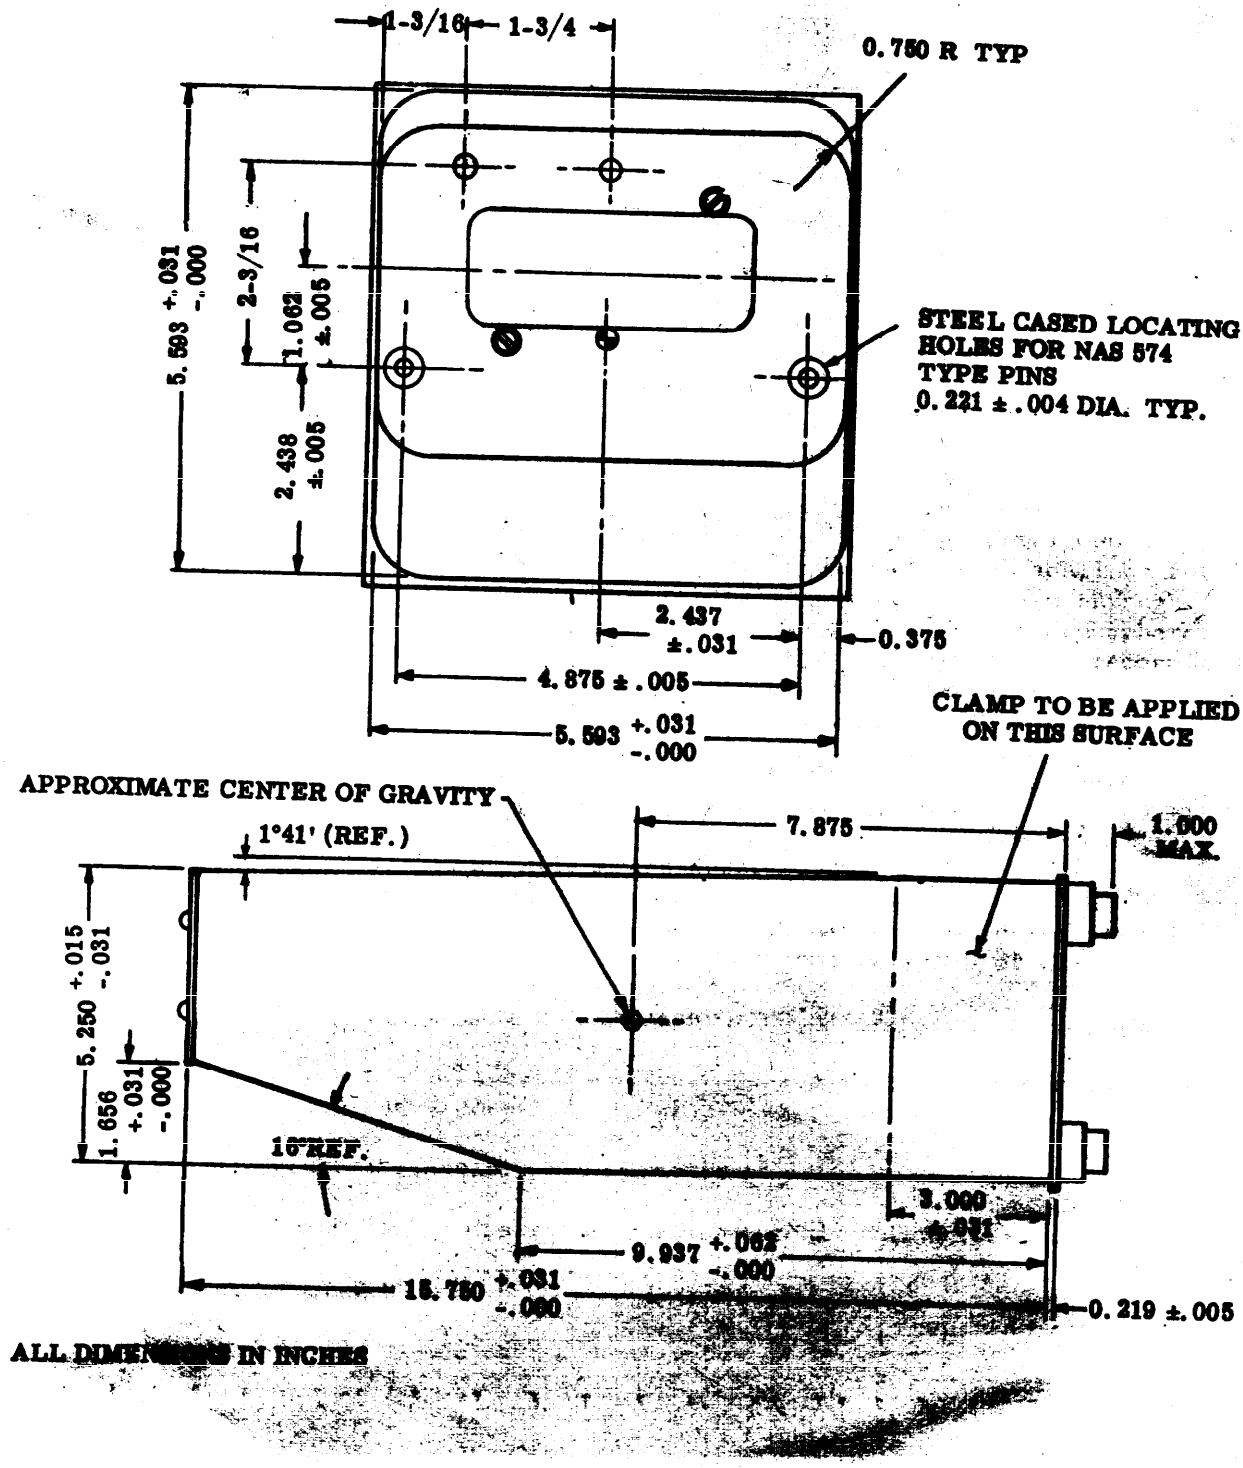


Figure 3. Case dimensions.

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:30Z
Check the source to verify that this is the current version before use.

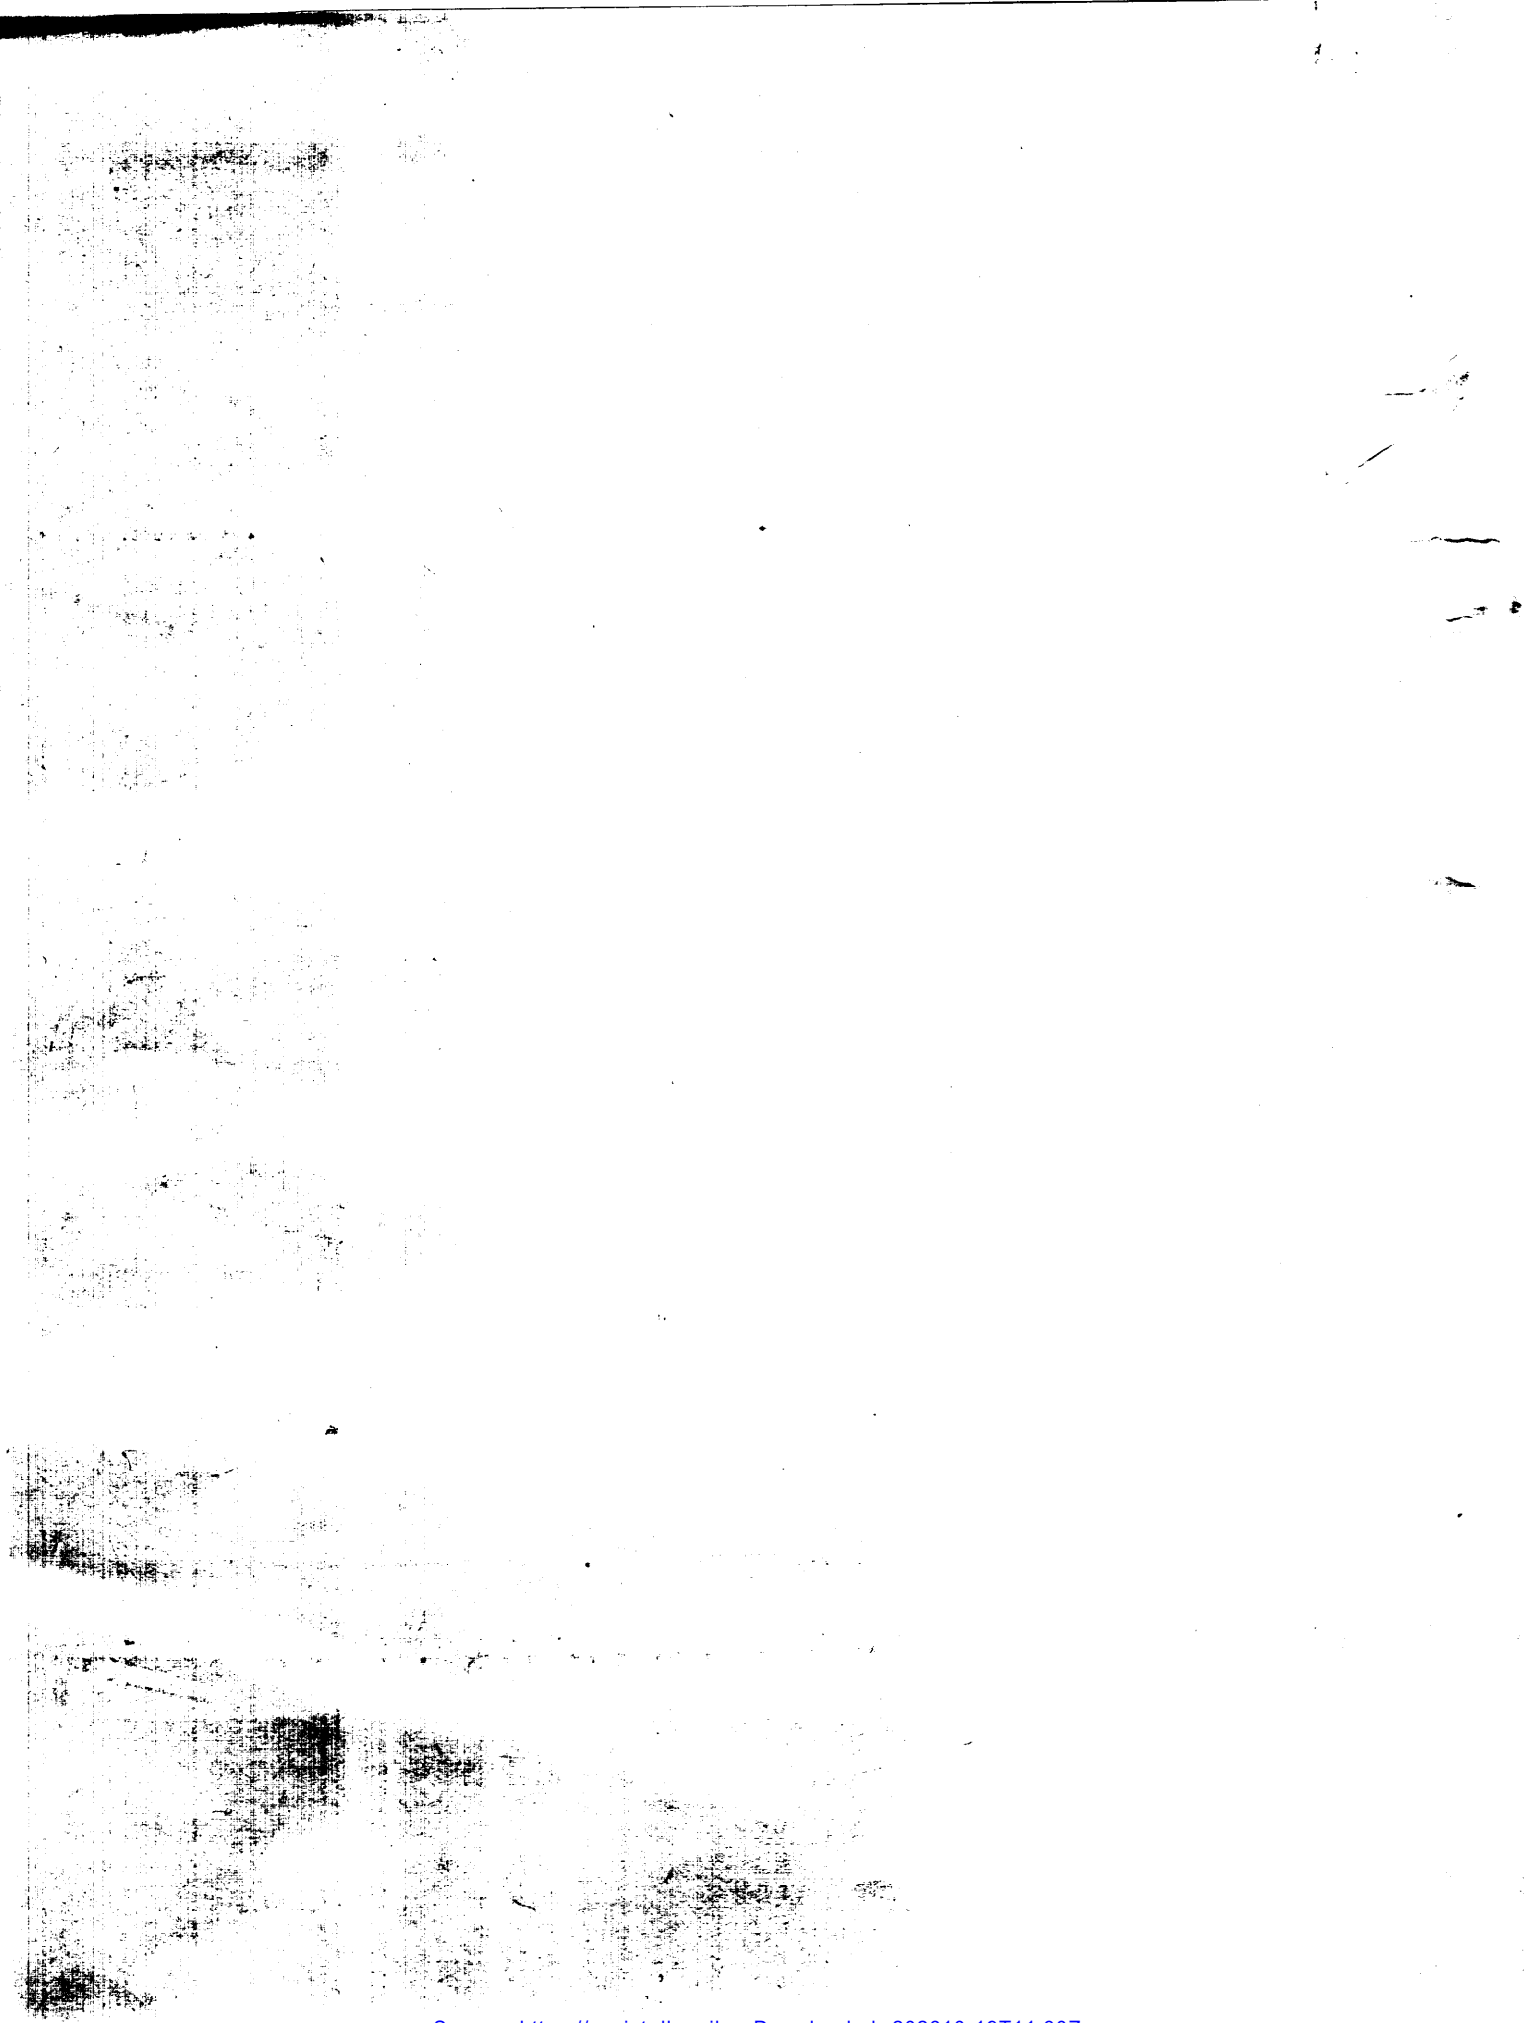

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:30Z
Check the source to verify that this is the current version before use.