INCH-POUND

MIL-A-51306B(EA)
27 July 1990
SUPERSEDING
MIL-A-51306A(EA)
16 September 1974

MILITARY SPECIFICATION

ADAPTER, OXYGEN SUPPLY, CHEMICAL-BIOLOGICAL MASK, M8

This specification is approved for use by the U.S. Army Chemical Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of a connector-coupling assembly.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Drawings. The following drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. ARMY CHEMICAL RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

DRAWINGS

5-82-13 - Adapter, Oxygen Supply, CBR Mask, M8

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-PET-S, Aberdeen Proving Ground, MD 21010-5423 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

SPECIAL PACKAGING INSTRUCTIONS (SPI)

P5-82-13 - Adapter, Oxygen Supply, CBR Mask, M8

(Copies are available from Commander, U.S. Army Information Systems Command, ATTN: ASQNC-ARI-CT, Rock Island, IL 61229-7300.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials and components. All materials and components shall conform to the specifications and drawings listed on Drawing 5-82-13 and on the subsidiary drawings.

3.2 Manufacture and assembly. The adapter shall be manufactured and assembled in accordance with Drawing 5-82-13.

3.3 Press fit joints. The press fit joints on the coupling assembly (Drawing 5-82-14) shall withstand a minimum torque of 15 foot-pounds when tested as specified in 4.4.6.1.

3.4 First article. Prior to the start of regular production, a first article sample of adapters shall be produced in accordance with this specification for examination and test (see 4.3).

3.5 Workmanship. The adapter shall be free from foreign matter and damage such as distortion, surface irregularities, tears, holes, cracks, and loss of paint.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Contractor assurance of compliance. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing, special packaging instruction, and specification requirements using, as a minimum, the conformance criteria specified herein.

4.1.3 Alternative inspection provisions. Alternative inspection procedures, methods, or equipment, such as statistical process control, tool control, and other types of sampling procedures may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the inspection provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation and approval. (See 6.3.) When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the quality assurance provisions specified herein. In cases of dispute as to whether the contractor's proposed alternative provides equal quality assurance, the provisions of this specification shall apply. All approved alternative inspection provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3)
(b) Quality conformance inspection (see 4.4)

4.3 First article inspection.

4.3.1 Sample. The first article sample shall consist of seven adapters manufactured and packaged (when applicable) using the same methods, materials, equipment, and processes as will be used during regular production. The first article sample shall be submitted for inspection and approval in accordance with the terms of the contract.

4.3.2 Inspections to be performed. As determined by the Government, the sample first article items may be subjected to any or all of the examinations and tests specified in this specification and be inspected for compliance with any or all of the requirements of the applicable drawings and special packaging instructions.

4.3.3 Rejection criteria. If any first article sample item fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government re-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

serves the right to terminate inspection upon any failure to comply with any of the requirements. The contractor shall obtain written approval from the contracting activity prior to proceeding with regular production.

4.4 Quality conformance inspection.

4.4.1 Lotting. A lot shall consist of the items produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions, and at essentially the same time.

4.4.2 Sampling. Sampling shall be conducted in accordance with the classification of characteristics in 4.4.5 and, when specified, table I. Samples shall be selected at random.

TABLE I. Sampling

Lot size	Inspection levels and sample sizes										
	I	II	III	IV	V	VI	VII	VIII	IX	X	XI
2 to 8	*	*	*	*	*	*	*	*	5	3	2
9 to 15	*	*	*	*	*	*	13	8	5	3	2
16 to 25	*	*	*	*	*	20	13	8	5	3	3
26 to 50	*	*	*	*	32	20	13	8	5	5	5
51 to 90	*	*	*	50	32	20	13	8	7	6	5
91 to 150	*	*	125	50	32	20	13	12	11	7	6
151 to 280	*	*	125	50	32	20	20	19	13	10	7
281 to 500	*	315	125	50	48	47	29	21	16	11	9
501 to 1200	*	315	125	75	73	47	34	27	19	15	11
1201 to 3200	1250	315	125	116	73	53	42	35	23	18	13
3201 to 10000	1250	315	192	116	86	68	50	38	29	22	15
10001 to 35000	1250	315	294	135	108	77	60	46	35	29	15
35001 to 150000	1250	490	294	170	123	96	74	56	40	29	15
150001 to 500000	1250	715	345	200	156	119	90	64	40	29	15
500001 and over	1250	715	435	244	189	143	102	64	40	29	15

*Indicates one hundred percent inspection. If sample size exceeds lot size, perform one hundred percent inspection.
Accept the lot represented on zero nonconforming characteristics and reject the lot represented on one or more nonconforming characteristics for all inspection levels.

4.4.3 Inspection procedure. Every item in the lot shall be inspected for critical characteristics. The lot represented shall be rejected when nonconformance to a critical character-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

istic is found. Sample items and, when applicable, the packaging thereof shall be examined and tested in accordance with the classification of characteristics in 4.4.5. Failure of any sample item to conform to any characteristic in the classification of characteristics based on the sampling and acceptance criteria specified therein shall be cause for rejection of the lot represented.

4.4.4 Inspection characteristics. Critical characteristics are characteristics whose nonconformance to specified requirements is likely to result in hazardous or unsafe conditions for individuals using, maintaining, or depending upon the product or whose nonconformance to specified requirements is likely to prevent performance of the tactical function of a major end item. Major characteristics are characteristics whose nonconformance to specified requirements is likely to result in failure or to reduce materially the usability of the item for its intended purpose. Minor characteristics are characteristics whose nonconformance to specified requirements is not likely to reduce materially the operation or usability of the item for its intended purpose.

4.4.5 Classification of characteristics. Quality conformance examinations and tests shall be as specified in the following classification of characteristics paragraphs. When specified herein, accept on 0 and reject on 1 attributes sampling inspection shall be performed on the designated characteristics using the stated levels in table I for selection of sample sizes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF CHARACTERISTICS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER 5-82-13
4.4.5(a)	Adapter, oxygen supply, CBR mask, M8		NEXT HIGHER ASSY

CATEGORY	CHARACTERISTIC	SAMPLING AND ACCEPTANCE CRITERIA	REQUIREMENT PARAGRAPH	INSPECTION METHOD
Critical	None defined			
Major				
101	Specified components correct and correctly assembled	Table I, Level VII	3.1, 3.2	VI
102	Press fit joints	Table I, Level VII	3.3	4.4.6.1
103	Workmanship	Table I, Level VII	3.5	VI

NOTES:
CE – Commercial inspection equipment
VI – Visual inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF CHARACTERISTICS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.5(b)	Packaging		P5-82-13
			NEXT HIGHER ASSY

CATEGORY	CHARACTERISTIC	SAMPLING AND ACCEPTANCE CRITERIA	REQUIREMENT PARAGRAPH	INSPECTION METHOD
Critical	None defined			
Major				
101	Item completely clean and dry prior to unit packing	Table I, Level VII	5.2	VI
102	Intimate wrap evident and correct	Table I, Level VII	5.2	VI and CE
103	Unit pack container evident and correct	Table I, Level VII	5.2	VI and CE
104	Unit pack container closure evident and correct	Table I, Level VII	5.2	VI and CE
105	Unit pack container marking evident and correct	Table I, Level VII	5.2	VI and CE

NOTES:

This paragraph is not applicable to packaging for interplant shipment.
VI – Visual inspection
CE – Commercial inspection equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

4.4.6 Tests.

4.4.6.1 Press fit joints. The adapters shall be subjected to the specified torque at the elbow and socket joints and at the elbow and connector joint using a suitable torque testing device.

5. PACKAGING

5.1 Interplant shipment (see 6.4). Military packaging as specified in 5.2 is not applicable for interplant shipments. The adapter shall be packaged to provide adequate protection from physical damage from the supply source to the first receiving activity for immediate use or further processing. Shipping containers shall be in compliance with the rules and regulations applicable to the mode of transportation.

5.2 Military packaging. For all shipments, other than interplant shipments (see 6.4), packaging (preservation, unit packing, packing and marking) shall be as specified in SPI P5-82-13.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The adapter covered by this specification is intended to be used to connect the ABC-M24 Aircraft Mask to the aircraft oxygen supply.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of this specification
(b) First article:

(1) Time allowed for contractor submission of samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether or not to proceed with production.
(c) Whether military packaging or interplant shipment is required.
(d) Level of packing required.
(e) Shelf life code markings

6.3 Submission of alternative inspection provisions. Propose alternative inspection provisions should be submitted by the contractor to the procuring contracting officer for

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

evaluation and approval by the technical activity responsible for preparation of this specification.

6.4 Interplant shipment. Packaging and marking for interplant shipment is for supplies and materials that do not directly enter the military supply system. Typical interplant shipments are from a vendor to a subcontractor or a prime contractor, or between contractors and subcontractors, or from a vendor or contractor to a military arsenal, plant or other activity for evaluation, immediate use, or further processing as specified in the applicable contract.

6.5 Figure 1. Figure 1 is a miniature reproduction of assembly drawing and is attached for information only.

6.6 Subject term (key word) listing.

Connector
Coupling
Fitting
Press fit joints

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 4240-A995

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

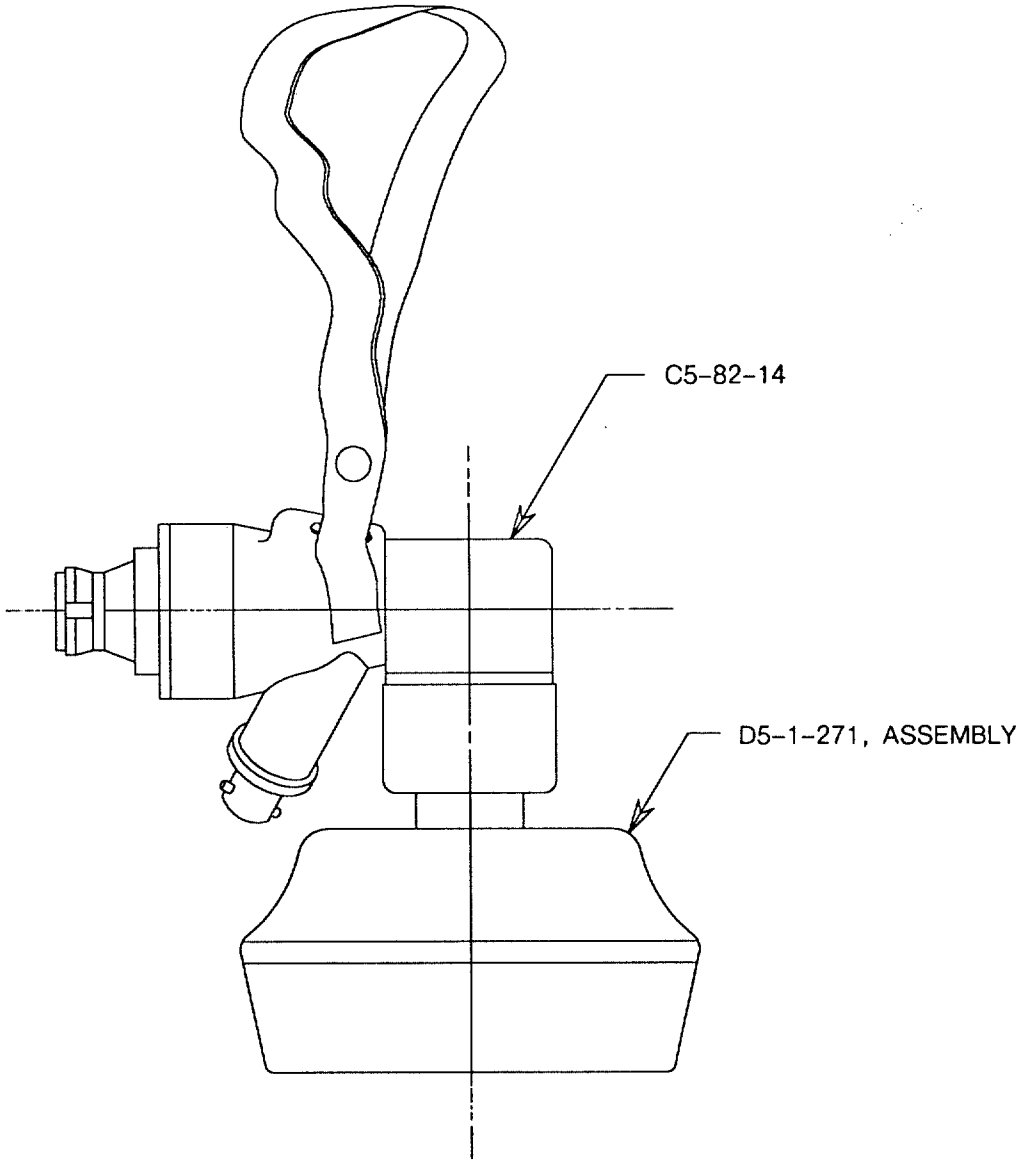


Figure 1. Adapter Oxygen Supply Chemical-Biological Mask, M8

THIS FIGURE IS A MINIATURE COPY OF A CRDEC DRAWING AND IS FOR INFORMATION ONLY: THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-51306B(EA)	ADAPTER, OXYGEN SUPPLY, CHEMICAL-BIOLOGICAL MASK, M8

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:56Z
Check the source to verify that this is the current version before use.