MIL-B-80115B
30 June 1986
SUPERSEDING
MIL-B-80115A
13 June 1979

MILITARY SPECIFICATION

BENDING MACHINE, ANGLES, BARS, AND SHAPES, VERTICAL BENDING PLANE OR HORIZONTAL BENDING PLANE, POWER OPERATED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers vertical and horizontal plane, powered bending machines for bending angle iron, round stock, flat stock, channel iron, and other structural materials into curved or circular parts. The vertical bending machine shall have the bending rolls mounted in the horizontal plane and the horizontal bending machine shall have the bending rolls in the vertical plane. The bending machine shall be furnished with the equipment and accessories specified herein.

1.2 Classification. Bending machines shall be of the following types and classes, and the sizes listed in tables I, II, 111, IV or V. The type, class, and size to be furnished shall be as specified (see 6.2.1). Figure 1 depicts the configuration of rolls for each type machine.

Type I - Pyramid roll configuration.

Class A - Vertical plane of bend (see table I).
Class B - Horizontal plane of bend (see table II).

Type II - Pinch-pyramid roll configuration.


Class A - Vertical plane of bend (see table III).
Class B - Horizontal plane of bend (see table IV).

Type IV - Vertical initial-pinch roll configuration (see table V).


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, Memphis, Tennessee 38114-5297, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3441
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

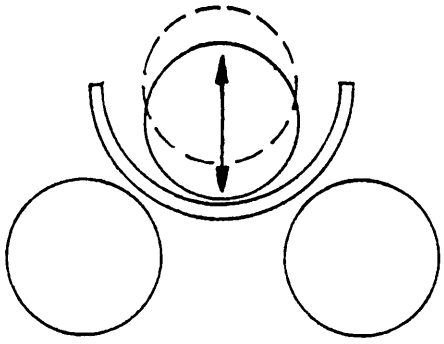

TYPE I
PYRAMID ROLLS

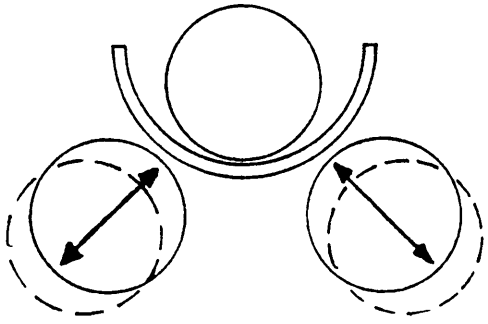

TYPE II
PINCH-PYRAMID ROLLS

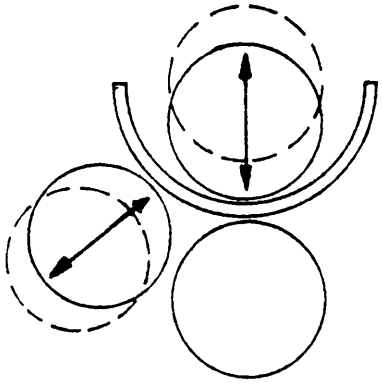

TYPE IV
INITIAL-PINCH ROLLS

FIGURE 1. Illustration of roll position and direction of adjustment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

2* APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-18058 - Machinery, Metal and Woodworking, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services.

FED-STD-376 - Preferred Metric Units for General Use by the Federal Government.

MILITARY

MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.

2.1.2 Other Government documents. The following other Government documents forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue shall be that in effect on the date of the solicitation.

U. S. DEPARTMENT OF LABOR

29 CFR, Chapter XVII, Part 1910 - Occupational Safety and Health Standards.

(Copies of specifications, standards, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment document which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI 611.12 - Safety Requirements for Construction, Care, and Use of Roll-Forming and Roll Bending Machines.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951- Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 79 - Electrical Standard for Industrial Machinery.

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order or precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order (see 6.2.1) a sample bending machine shall be subjected to first article inspection (see 4.4 and 6.3).

3.2 Design. The bending machine shall be new and one of the manufacturer's current models capable of bending operations in accordance with the requirements herein. The machine shall include all components, parts, and features necessary to meet the performance requirements specified herein. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repair.

3.2.1 Measurement systems. Unless otherwise specified, either the U.S. Customary System of Units (US) or the International System of Units (SI) shall be used in the design and construction of the bending machine. When only one system of measurement is acceptable, the particular system

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

required shall be as specified (see 6.2.1), In this specification, all measurements, dimensions, sizes, and capacities are given in US units. These measurements may be converted to SI units through the use of the conversion factors and methods specified in FED-STD-376.

3.2.1.1 Measuring and indicating device calibrations. Unless otherwise specified, either the U.S. Customary System of Units (US) or the International System of Units (SI) shall be used to graduate measuring and indicating devices. When only one system of graduation is acceptable, the particular graduation required shall be as specified (see 6,2.1). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system.

3.2.1.2 Dual calibrations. When specified (see 6,2.1), measuring and indicating devices shall be graduated in both the US and the SI System of Measurements.

3.2.2 Reclaimed materials, The bending machine may contain reclaimed materials provided such materials will not jeopardize its intended use and performance. The reclaimed materials shall have been reprocessed, remanufactured, or recycled in a manner which will restore them to the same chemical composition and physical properties as the materials originally selected for use on the machine.

3.2.3 Energy efficiency. The machine and its applicable components that directly consume energy in normal operation shall be designed and constructed for the highest degree of energy efficiency as governed by the latest developments available within the industry.

3.2,4 Controls. All operating controls shall be located conveniently to the operator at his normal work station.

3.2.5 Safety and health requirements. Covers, guards, or other safety devices shall be provided for all parts of the bending machine that present safety hazards. The safety devices shall not interfere with the operation of the machine. The safety devices shall prevent unintentional contact with the guarded part, and shall be removable to facilitate inspection, maintenance, and repair of the parts. All machine parts, components, mechanisms, and assemblies furnished on the machine, whether or not specifically required herein, shall comply with all of the requirements of of OSHA 2206 that are applicable to the machine itself. In addition to OSHA, the machine shall comply with all requirements of ANSI B11.12. Additional safety and health requirements shall be as specified (see 6.2.1 and 6.4),

3.2.6 Mercury restriction. The machine shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.2.7 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the machine.

3.2.8 Environmental protection. The bending machine shall be so designed and constructed that, under the operating, service, transportation, and storage conditions described herein, the machine shall not emit materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect at point of installation (see 6.4).

3.2.9 Lubrication. Means shall be provided to ensure adequate lubrication for all moving parts. Recirculating lubrication systems shall include a cleanable or replaceable filter. Each lubricant reservoir shall have means for determining fluid level. All oil holes, grease fittings, and filler caps shall be accessible.

3.2.10 Interchangeability. All parts shall be manufactured to definite dimensions and tolerances that will permit installation of replacement parts without modification of the part or machine.

3.3 Construction. The machine shall be constructed of parts which are new, without defects, and free of repairs. The structure shall be capable of withstanding all forces encountered during operation of the machine at its maximum rating and capacity without permanent distortion.

3.3.1 Castings and forgings. All castings and forgings shall be free from defects such as scale and mismatching. Processes such as welding, peening, plugging, or filling with solders or pastes shall not be used on castings or forgings to reclaim any defective components for use on the machine. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these processes shall be employed as a repair measure for any defective part.

3.3.3 Fastening devices. All screws, pins, bolts, and other fasteners shall be installed in a manner to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently installed.

3.3.4 Surfaces. All surfaces shall be clean and free of sand, dirt, fins, sprues, flash, scale, flux, and other harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer’s commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.3.5 Painting. Unless otherwise specified (see 6.2.1), the bending machine shall be painted in accordance with the manufacturer's commercial practice and color.

3.3.6 Threads. All threaded parts used on the machine and its related attachments and accessories shall conform to FED-STD-H28.

3.3.7 Gears. All gears shal l be constructed from a material suitable for the intended purpose. All gears shall have the hardness, surface finish, and toughness that will enable the gear train to transmit full rated torque of the drive motor without gear damage, failure, or premature deterioration and wear.

3.3.8 Electromagnetic interference control. When specified (see 6.2.1), equipment furnished under this specification shall comply with MIL-STD-461. The equipment and subsystems class and the emission and susceptibility requirements shall be as specified.

3.4 Components. The bending machine shall consist of not less than the frame, base, bearings, bending rolls, drive system, guide rolls, roll position indicator, roll controls, leg-in attachment, hydraulic system, and electrical system.

3.4.1 Frame. The frame shall have the required strength and rigidity to support and maintain alignment of all components necessary to perform bending operations as required herein.

3.4.2 Base. The machine shall have either a separate base to support the frame or an integral base and frame. The base or integral base and frame shall have mounting bolt holes provided to permit fastening the machine to the floor.

3.4.3 Bearings. All spindles, shafts, bending rolls, and any other rotating parts shall be supported by either replaceable sleeve type or anti-friction type bearings of a class and capacity suitable for their application.

3.4.4 Rolls. Unless otherwise specified the machine shall be furnished with one set of bending rolls capable of meeting the angle bending requirements specified in tables I, II, III, IV, or V for the type, class, and size machine specified. When required, additional bending rolls shall be furnished as specified and fully described (see 6.2.1). The bending rolls shall be constructed of high carbon steel of the hardness necessary to resist wear and deformation due to contact with the workplaces being formed.

3.4.4.1 Pyramid bending machine. The pyramid bending machine shall have three rolls arranged in the form of a pyramid as depicted in figure 1. The roll for the inner radius shall be symetrically positioned above the other rolls and shall be adjustable to 'control the 'amount of curvature

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE I. Sizes and capacities - type I, class A bending rolls.

Characteristics	Capacities in vertical plane of bending							
	Size 2	Size 2a	Size 3	Size 5	Size 6	Size 7	Size 8	Size 9
Angles - leg out Inside dia. (min.)	2 x 2 x 1/4 20	2-1/2 x 2-1/2 x 3/8 22	3 x 3 x 3/8 24	3-1/2 x 3-1/2 x 7/16 30	4 x 4 x 1/2 24	5 x 5 x 3/8 60	6 x 6 x 3/4 120	6 x 6 x 1 84
Angles - leg in Outside dia. (min.)	1-1/2 x 1-1/2 x 1/4 18	2-1/4 x 2-1/4 x 3/8 24	2-1/2 x 2-1/2 x 3/8 30	3 x 3 x 1/2 36	4 x 4 x 1/2 30	3-1/2 x 3-1/2 x 5/8 48	6 x 6 x 3/4 84	6 x 6 x 1 108
Smallest angle - leg out 1/ Inside dia. (min.)	3/4 x 3/4 x 1/8 10	3/4 x 3/4 x 1/8 14	1-1/2 x 1-1/2 x 3/16 18	1-1/4 x 1-1/4 x 1/8 14	1-1/2 x 1-1/2 x 3/16 18	1-1/2 x 1-1/2 x 3/16 18	2-1/2 x 2-1/2 x 3/8 30	2-1/2 x 2-1/2 x 3/8 30
Smallest angle - leg in 1/ Outside dia. (min.)	3/4 x 3/4 x 1/8 14	3/4 x 3/4 x 1/8 16	1-1/2 x 1-1/2 x 3/16 24	1-1/4 x 1-1/4 x 1/8 15	1-1/2 x 1-1/2 x 3/16 20	1-1/2 x 1-1/2 x 3/16 20	2 x 2 x 3/8 36	2 x 2 x 3/8 36
Flat on edge Inside dia. (min.)	2 x 3/8 15	2-1/2 x 1/2 30	3 x 5/8 36	3 x 3/4 30	4 x 1 36	4 x 1 48	6 x 1-1/2 72	6 x 1-1/2 72
Flat on flat Inside dia. (min.)	3 x 3/4 20	5 x 1/2 20	6 x 1 20	6 x 1 17	9 x 1 22	9 x 1-1/4 30	12 x 1-1/2 36	12 x 1-1/2 36
Round bar Inside dia. (min.)	1-1/2 diameter 20	1-5/8 diameter 20	2 diameter 24	2-1/8 diameter 20	3 diameter 26	2-3/4 diameter 30	3-1/4 diameter 36	3-1/4 diameter 36
Square bar Inside dia. (min.)	1-1/4 x 1-1/4 20	1-3/8 x 1-3/8 20	1-3/4 x 1-3/4 24	1-7/8 x 1-7/8 20	2-1/2 x 2-1/2 26	2-1/2 x 2-1/2 30	3 x 3 36	3 x 3 36
Standard pipe Inside dia. (min.)	1-1/2 diameter 18	1-3/4 diameter 18	2-1/2 diameter 30	2-1/4 diameter 20	3-1/2 diameter 24	3-1/2 diameter 38	5 diameter 36	5 diameter 36
Beam on flanges Inside dia. (min.)	3 x 7-1/2# 24	3 x 7-1/2# 24	5 x 12-1/4# 40	3 x 7-1/2# 60	3 x 7-1/2# 24	8 x 18# 60	4 x 10-1/2# 84	4 x 10-1/2# 84
Channel - flange out Inside dia. (min.)	3 x 4# 16	4 x 6-1/4# 18	5 x 11-1/2# 18	5 x 11-1/2# 20	9 x 20# 48	9 x 20# 48	12 x 44-1/2# 66	12 x 44-1/2# 66
Channel - flange in Inside dia. (min.)	3 x 4# 24	3 x 4# 24	5 x 9# 20	5 x 9# 20	7 x 14-3/4# 48	7 x 14-3/4# 48	12 x 44-1/2# 66	12 x 44-1/2# 66
Roll RPM	18	15	10	15	18	7	6	7
Feet per minute	31	40	30	40	35	31	27	28
Motor HP	5	10	10	20	30	20	40	40

Note: The capacity shall be not less than the figures shown except that when a minimum (min) is shown, the capacity shall be not more than the figure shown.
All dimensions are given in inches except as otherwise indicated.
1/ With standard rolls

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE II. Sizes and canacities - type I, class B bending rolls.

Characteristics	Capacities in horizontal plane of bending									
	Size 1	Size 2	Size 3	Size 4	Size 5	Size 6	Size 7	Size 8	Size 9	Size 10
Angles - leg out Inside dia. (min.)	2 x 2 x 1/4 20	2-1/2 x 2-1/2 x 3/8 22	3 x 3 x 3/8 24	4 x 4 x 1/2 24	5 x 5 x 3/8 60	6 x 6 x 1/2 72	6 x 6 x 1 84	8 x 8 x 3/4 98	8 x 8 x 1 110	10 x 10 x 1 130
Angles - leg in Outside dia. (min)	1-1/2 x 1-1/2 x 1/4 18	2-1/4 x 2-1/4 x 3/8 24	2-1/2 x 2-1/2 x 3/8 30	4-1/2 x 4-1/2 x 1/2 30	3-1/2 x 3-1/2 x 5/8 48	6 x 6 x 1/2 108	6 x 6 x 1 96	8 x 8 x 3/4 125	8 x 8 x 1 144	10 x 10 x 1 160
Smallest angle - leg out 1/ Inside dia. (min.)	3/4 x 3/4 x 1/8 10	3/4 x 3/4 x 1/8 14	1-1/2 x 1-1/2 x 3/16 18	1-1/2 x 1-1/2 x 3/16 18	1-1/2 x 1-1/2 x 3/16 18	2 x 2 x 1/4 30	2-1/2 x 2-1/2 x 3/8 30	2-3/4 x 2-1/2 x 3/8 40	3 x 3 x 1/4 44	3 x 3 x 1/4 48
Smallest angle - leg in 1/ Outside dia. (min)	3/4 x 3/4 x 1/8 14	3/4 x 3/4 x 1/8 16	1-1/2 x 1-1/2 x 3/16 24	1-1/2 x 1-1/2 x 3/16 20	1-1/2 x 1-1/2 x 3/16 20	2 x 2 x 1/4 30	2 x 2 x 3/8 36	2-3/4 x 2 x 3/8 40	3 x 3 x 1/4 48	3 x 3 x 1/4 52
Flat on edge Inside dia. (min.)	2 x 3/8 15	2-1/2 x 1/2 30	3 x 5/8 36	4 x 1 36	4 x 1 48	6 x 7/8 72	6 x 1-1/2 82	8 x 1-3/8 80	8 x 2 85	10 x 2 100
Flat on flat Inside dia (min.)	5 x 1/2 14	5 x 1/2 20	6 x 1 20	9 x 1 22	9 x 1-1/4 30	10 x 2 50	12 x 1-1/2 36	12 x 2-3/4 42	15 x 3 60	20 x 3 46
Round bar Inside dia. (min.)	1-1/2 diameter 20	1-5/8 diameter 20	2 diameter 24	3 diameter 26	2-3/4 diameter 30	3-3/4 diameter 48	3-1/4 diameter 54	5-1/4 diameter 52	6 diameter 72	7 diameter 70
Square bar Inside dia. (min.)	1-1/4 x 1-1/4 20	1-3/8 x 1-3/8 20	1-3/4 x 1-3/4 24	2-1/2 x 2-1/2 26	2-1/2 x 2-1/2 30	3-1/4 x 3-1/4 72	3 x 3 56	4-1/2 x 4-1/2 45	5 x 5 70	6 x 6 60
Standard pipe Inside dia. (min)	1-1/2 diameter 18	1-3/4 diameter 18	2-1/2 diameter 30	3-1/2 diameter 24	3-1/2 diameter 38	5 diameter 90	5 diameter 76	6 diameter 72	8 diameter 104	10 diameter 130
Beam on flanges Inside dia. (min.)	3 x 7-1/2# 24	3 x 7-1/2# 24	5 x 12-1/4# 40	3 x 7-1/2# 24	8 x 18# 60	12 x 50# 72	4 x 10-1/2# 84	12 x 50# 66	15 x 50# 52	18 x 96# 72
Channel - flange out Inside dia. (min.)	3 x 4# 16	4 x 6-1/4# 18	5 x 11-1/2# 18	9 x 20# 48	9 x 20# 48	12 x 30# 48	12 x 44-1/2# 66	15 x 50# 36	15 x 50# 40	18 x 58# 40
Channel - flange in Inside dia. (min.)	3 x 4# 24	3 x 4# 24	5 x 9# 20	7 x 14-3/4# 48	7 x 14-3/4# 48	12 x 30# 48	12 x 30# 66	15 x 50# 36	15 x 50# 40	18 x 58# 46
Roll RPM	18	15	10	18	7	5	5	5	4	4
Feet per minute	33	40	30	35	30	30	30	30	30	16
Motor HP	5	10	10	30	20	30	40	75	75	150

Note: The capacity shall be not less than the figures shown except that when a minimum (min) is shown, the capacity shall be not more than the figure shown.
All dimensions are given in inches except as otherwise indicated
1/ With standard rolls

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

Characteristics	Capacities in vertical plane of bending					
	Size 3	Size 4	Size 5	Size 6	Size 7	Size 8
Angles - leg out Inside dia. (min.)	2 x 2 x 5/16 20	3 x 3 x 5/16 35	3-1/2 x 3-1/2 x 3/8 40	4 x 4 x 3/8 48	4-1/2 x 4-1/2 x 1/2 50	5 x 5 x 3/8 68
Angles - leg in Outside dia. (min.)	2 x 2 x 1/4 24	2-1/2 x 2-1/2 x 1/4 40	3 x 3 x 3/8 48	3 x 3 x 3/8 48	3-1/2 x 3-1/2 x 1/2 60	4 x 4 x 3/8 60
Smallest angle - leg out 1/	3/4 x 3/4 x 1/8	1 x 1 x 1/8	1-1/4 x 1-1/4 x 1/8	1-1/8 x 1-1/8 x 1/8	1-1/2 x 1-1/2 x 1/8	1-1/2 x 1-1/2 x 1/8
Flat on edge Inside dia. (min.)	2-1/4 x 1/2 16	3 x 1/2 36	4 x 3/4 32	3-1/2 x 3/4 35	5 x 3/4 36	4 x 1 50
Flat on flat Inside dia. (min.)	5 x 5/8 16	4-1/2 x 1 20	7 x 1 32	5-1/2 x 1-1/4 25	8 x 1-1/4 36	7 x 1-1/4 40
Round bar Inside dia. (min.)	1-5/16 diameter 18	1-5/8 diameter 19	1-3/4 diameter 19	2-1/4 diameter 20	2-3/4 diameter 25	2-3/4 diameter 30
Square bar Inside dia. (min.)	1-1/4 x 1-1/4 18	1-5/8 x 1-5/8 19	2 x 2 20	2 x 2 22	2-1/2 x 2-1/2 30	2-1/2 x 2-1/2 30
Standard pipe Inside dia. (min.)	1-1/2 diameter 16	2 diameter 28	2-1/2 diameter 32	2-1/2 diameter 46	4 diameter 48	3-1/2 diameter 48
Channel - flange out Inside dia. (min.)	3 x 4# 1	4 x 7-1/4# 16	2 x 6 13# 40	5 x 9# 18	5 x 9# 18	6 x 13# 20
Channel - flange in Inside dia. (min.)	3 x 4# 24	4 x 7-1/4# 16	2 x 6 13# 18	5 x 9# 18	5 x 9# 18	6 x 13# 20
Feet per minute	15	16	29	16	23	22
Motor HP	3	4	5	10	12	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE III. Sizes and capacities - type II, class A bending rolls - Continued.

Characteristics	Capacities in vertical plane of bending					
	Size 9	Size 10	Size 11	Size 12	Size 13	Size 14
Angles - leg out Inside dia. (min.)	5 x 5 x 5/8 65	6 x 6 x 5/8 85	6 x 6 x 1 100	8 x 8 x 3/4 110	8 x 8 x 1 125	10 x 10 x 1 160
Angles - leg in Outside dia. (min.)	5 x 5 x 1/2 90	5 x 5 x 3/4 90	6 x 6 x 3/4 130	6 x 6 x 1 100	8 x 8 x 3/4 140	8 x 8 x 1 150
Smallest angle - leg out 1/	1-1/2 x 1-1/2 x 1/4	1-1/2 x 1-1/2 x 1/4	2 x 2 x 1/4	2-1/2 x 2-1/2 x 1/4	3 x 3 x 1/4	3-1/2 x 3-1/2 x 1/4
Flat on edge Inside dia. (min.)	5 x 1-1/4 50	5 x 1 60	6 x 1-5/8 75	7-1/2 x 2 80	8 x 2-1/4 80	8 x 2-1/2 100
Flat on flat Inside dia. (min.)	7 x 1-1/2 50	10 x 1-3/4 50	9-1/2 x 2-1/2 50	14 x 2-3/8 60	15 x 3 80	20 x 3 100
Round bar Inside dia. (min.)	3-1/2 diameter 35	3-1/2 diameter 40	4-1/4 diameter 45	5 diameter 50	6 diameter 55	6-1/2 diameter 65
Square bar Inside dia. (min.)	2-3/4 x 2-3/4 35	3 x 3 40	3-5/8 x 3-5/8 52	5 x 5 50	6 x 6 55	6-1/2 x 6-1/2 65
Standard pipe Inside dia. (min.)	5 diameter 65	5 diameter 75	6 diameter 85	8 diameter 120	9 diameter 120	10 diameter 140
Channel - flange out Inside dia. (min.)	6 x 13# 20	8 x 18-3/4# 24	12 x 30# 30	15 x 50# 36	15 x 50# 40	18 x 53# 40
Channel - flange in Inside dia. (min.)	6 x 13# 20	8 x 18-3/4# 24	12 x 30# 30	15 x 50# 36	15 x 50# 40	18 x 58# 46
Feet per minute	23	23	16	23	23	23
Motor HP	17	20	45	60	75	75

Note: The capacity shall be not less than the figures shown except that when a minimum (min) is shown, the capacity shall be not more than the figure shown.
All dimensions are given in inches except as otherwise indicated.
1/ With standard rolls

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE IV. Sizes and capacities - type II, class B bending rolls

Characteristics	Capacities in horizontal plane of bending								
	Size 1	Size 2	Size 3	Size 4	Size 5	Size 6	Size 7	Size 8	Size 9
Angles - leg out Inside dia. (min.)	2 x 2 x 5/16 20	3 x 3 x 5/16 35	3-1/2 x 3-1/2 x 3/8 40	4 x 4 x 3/8 48	4-1/2 x 4-1/2 x 1/2 50	5 x 5 x 3/8 68	5 x 5 x 5/8 65	6 x 6 x 5/8 85	6 x 6 x 1 100
Angles - leg in Outside dia. (min.)	2 x 2 x 1/4 24	2-1/2 x 2-1/2 x 1/4 40	3 x 3 x 3/8 44	3 x 3 x 3/8 48	3-1/2 x 3-1/2 x 1/2 60	4 x 4 x 3/8 60	5 x 5 x 1/2 90	5 x 5 x 3/4 90	6 x 6 x 3/4 130
Smallest angle - leg out 1/	3/4 x 3/4 x 1/8	1 x 1 x 1/8	1-1/4 x 1-1/4 x 1/8	1-1/8 x 1-1/8 x 1/8	1-1/2 x 1-1/2 x 1/8	1-1/2 x 1-1/2 x 1/8	1-1/2 x 1-1/2 x 1/4	1-1/2 x 1-1/2 x 1/4	1-1/2 x 1-1/2 x 1/4
Flat on edge Inside dia. (min.)	2-1/4 x 1/2 16	3 x 1/2 36	4 x 3/4 32	3-1/2 x 3/4 35	5 x 3/4 36	4 x 1 50	5 x 1-1/4 50	5 x 1 60	6 x 1-5/8 60
Flat on flat Inside dia. (min.)	5 x 5/8 16	4-1/2 x 1 20	7 x 1 32	5-1/2 x 1-1/4 25	8 x 1-1/4 36	7 x 1-1/2 40	7 x 1-1/2 50	10 x 1-3/4 50	9-1/2 x 2-1/2 50
Round bar Inside dia (min.)	1-5/16 diameter 18	1-5/8 diameter 19	1-3/4 diameter 19	2-1/4 diameter 20	2-3/4 diameter 25	2-3/4 diameter 30	3-1/2 diameter 35	3-1/2 diameter 40	4-1/4 diameter 45
Square bar Inside dia. (min.)	1-1/4 x 1-1/4 18	1-5/8 x 1-5/8 19	2 x 2 20	2 x 2 22	2-1/2 x 2-1/2 30	2-1/2 x 2-1/2 30	2-3/4 x 2-3/4 35	3 x 3 40	3-5/8 x 3-5/8 52
Standard pipe Inside dia (min.)	1-1/2 diameter 16	2 diameter 28	2-1/2 diameter 32	2-1/2 diameter 46	4 diameter 48	3-1/2 diameter 48	5 diameter 65	5 diameter 75	6 diameter 85
Channel - flange out Inside dia. (min.)	3 x 4# 16	4 x 7-1/4# 16	2 x 6, 13# 40	5 x 9# 18	5 x 9# 18	6 x 13# 20	6 x 13# 20	8 x 18-3/4# 24	12 x 30# 30
Channel - flange in Inside dia (min.)	3 x 4# 24	4 x 7-1/4# 16	2 x 6, 13# 18	5 x 9# 18	5 x 9# 18	6 x 13# 20	6 x 13# 20	8 x 18-3/4# 24	12 x 30# 30
Feet per minute	15	16	29	16	23	22	23	23	16
Motor HP	3	4	5	10	12	12	17	20	45

Notes: The capacity shall be not less than the figures shown, except that where a minimum (min) is shown, the capacity shall be not more than the figure shown.
All dimensions are in inches except as otherwise indicated
1/ With standard rolls

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

TABLE V. Sizes and capacities - type IV bending rolls.

Characteristics	Capacity in vertical plane of bending	
	Size 1	Size 2
Angles - leg out Inside dia (min)	2 x 2 x 1/4 24	3 x 3 x 3/8 30
Angles - leg in Outside dia (min)	1-1/2 x 1-1/2 x 1/4 24	2-1/2 x 2-1/2 x 3/8 30
Smallest angle leg out Inside dia (min) 1/	3/4 x 3/4 x 1/8 12	1-1/2 x 1-1/2 x 3/16 18
Smallest angle leg in Outside dia (min) 1/	3/4 x 3/4 x 1/8 16	1-1/2 x 1-1/2 x 3/16 27
Flat on edge Inside dia (min)	2 x 3/8 24	3 x 5/8 36
Flat on flat Inside dia (min)	3 x 3/4 18	5 x 1 24
Round bar Inside dia (min)	1-1/2 diameter 20	2 diameter 24
Square bar Inside dia (min)	1-1/4 x 1-1/4 20	1-3/4 x 1-3/4 24
Standard steel pipe Inside dia (min)	1-1/2 diameter 20	2-1/2 diameter 30
Feed rate (feet per minute)	25	25
Motor HP	5	10

Notes: The capacity shall be not less than the figures shown, except that where a minimum (rein) is shown, the capacity shall be not more than the figure shown.
All dimensions are in inches except as otherwise indicated.

1/ With standard rolls

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

being formed. The two rolls for the outer radius shall be in a fixed position. The vertical pyramid bending machine shall have all rolls mounted in the horizontal plane and the workpiece shall pass through the machine in the vertical plane. The horizontal pyramid bending machine shall have the rolls in the vertical plane and the workpiece in the horizontal plane.

3.4.4.2 Pinch-pyramid bending machine. The pinch-pyramid bending machine shall have three ro11s arranged in pyramid fashion as depicted in figure 1. The roll for the inner radius shall be in a fixed position and the two rolls for the outer radius shall be independently adjustable. The vertical pinch-pyramid bending machine shall have all rolls in the horizontal plane and the workplaces bent in the vertical plane. The horizontal pinch-pyramid bending machine shall have the rolls mounted in the vertical plane and the workplaces shall be bent in the horizontal plane.

3.4.4.3 Vertical initial-pinch bending machine. The vertical initial-pinch bending machine shall have three rolls mounted in the horizontal plane which shall bend the workplaces in the vertical plane as depicted in figure 1. The top roll shall be adjustable to accept different thicknesses of material. Means shall be provided to raise or tilt the top roll to permit removal of a finished workpiece. The lower front roll shall be off-set in relation to the top roll and shall be in a fixed position. The rear roll or bending roll shall be adjustable angularly to determine radius of curvature.

3.4.5 Drive system. Unless otherwise specified, the bending machine shall be driven either by an electric motor with reduction gear drive or a hydraulic drive system. When only one type drive system is acceptable, the particular system shall be as specified (see 6.2.1). The drive system shall have a slip clutch or other means of compensating for the difference in the surface speeds of the inner and outer circumferences of the workpiece being rolled. All bending roll shafts shall be power driven.

3.4.6 Guide rolls. The machine shall have two or more adjustable guide rolls to prevent twisting or deformation of the workpiece.

3.4.7 Roll position indicator. A dial, scale, digital readout, or other similar means shall be provided to show the position of the adjustable rolls.

3.4.8 Adjustable roll positioning controls. Unless otherwise specified, all adjustable rolls shall be positioned by electric or hydraulic controls. When only one type of positioning control is acceptable, the particular type shall be as specified (see 6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.4.9 Leg-in attachment. The machine shall be furnished with a leg-in attachment consisting of either adjustable auxiliary rollers, steel fingers, or a combination of auxiliary rollers and steel fingers that shall prevent twisting of angle workplaces being bent. The leg-in attachment shall be capable of enlarging circular workplaces.

3.4.10 Hydraulic system. When a hydraulic system is furnished it shall be complete, including all pumps, valves, piping, cylinders, and pressure controls. Overpressure protection shall be provided in the high pressure line. A filter system shall be provided to ensure delivery of clean fluid. The hydraulic reservoir shall have means for determining fluid level,

3.4.11 Electrical system. Unless otherwise specified (see 6.2.1), the electrical system shall conform to NFPA 79. Each machine shall draw all of its electrical power from a single 230/460 volt, 3 phase, 60 Hz circuit. Each machine shall have a fused safety disconnect switch or circuit breaker. The machine shall be initially wired for operation on 460 volts. An identified terminal for grounding the machine when it is installed shall be mounted in or near the disconnect switch, The terminal shall be suitable for connecting the size grounding conductor specified in NFPA 79 for the disconnect fuse rating.

3.4.11.1 Motors. Motors shall be rated for continuous duty and shall have ball or r-bearings of the sealed and permanently lubricated type. Unless otherwise specified (see 6.2.1), each motor enclosure shall have a dripproof enclosure. Mechanical motor starter relays may be used with the main drive motor.

3.4.11,2 Solid state components. Except for the relays allowed in 3.4.11.1, solid state design shall be used throughout for electronic components.

3.4.11.3 Control circuit voltage. Auxiliary control circuits shall be isolated from the input electric power supply by a low-voltage transformer having a secondary voltage no greater than 120 volts.

3.5 Size and capacity. Unless otherwise specified (see 6.2,1), the size and capacity of the machine shall be not less than those specified in tables I through V for the type, class, and size machine specified.

3.6 Performance. The bending machine shall be capable of bending the structural shape materials of the-capacities listed in tables I through V for the type, class, and size specified. Capacities are based on material with tensile strength of not less than 60,000 pounds per square inch (psi). All beam and channel sizes listed in tables I, II, III, and IV are in pounds per foot.

3.6.1 Additional performance requirements. Performance features required in addition to, or in lieu of, the requirements herein shall be as specified and fully described (see 6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

3.7 Standard equipment. Unless otherwise specified, all standard equipment normally furnished by the manufacturer shall be furnished. Additional equipment required shall be furnished as specified and fully described (see 6.2.1).

3.8 Optional equipment. Optional equipment shall be furnished as specified and shall be fully described (see 6.2.1).

3.9 Repair parts. Such repair parts as are specified (see 6.2.1), shall be furnished.

3.10 Marking on plates and charts. All words on plates and charts shall be in the Engish language. Characters shall be engraved, etched, embossed, or stamped in boldface on a contrasting background.

3.10.1 Lubrication chart or plate. Unless otherwise specified (see 6.2.1), a lubrication chart or plate shall be securely attached to each machine. If a chart is furnished, it shall be placed in a transparent plastic folder, or permanently sealed between clear plastic sheets, with suitable means of mounting. The chart or plate shall contain the following information:

Points of lubricant application
Servicing interval
Type of lubricant
Viscosity

3.10.2 Nameplate. Unless otherwise specified (see 6.2.1), a nameplate shall be securely attached to each machine. The nameplate shall contain the information listed below. If the machine is a special model, the model designation shall include the model of the basic standard machine and a suffix identified in the manufacturer's permanent records. The captions listed may be shortened or abbreviated, provided the entry for each caption is clear as to its identity.

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
Power input (volts, total amps, phase, frequency)
Contract Number or Order Number
National Stock Number or Plant Equipment Code
Date of manufacture

3.11 Hour meter. Unless otherwise specified (see 6.2.1), the machine shall be equipped with an hour meter. The hour meter shall be installed to display accumulated operating time of the main drive motor. The meter

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

shall be of the nonresetting type and shall have a range of 0 to 99,999 hours in increments of one hour. The meter shall be sealed to prevent the entrance of dust and moisture and shall be mounted to withstand shock and vibration generated by the machine. Upon reaching 99,999 hours, the meter readout shall automatically return to zero and continue to accumulate time.

3.12 Technical data. When technical data is required it shall be furnished in accordance with the requirements of the contract. All technical data furnished shall be written in the English language.

3.13 Workmanship. Workmanship of the bending machine and accessories shall be of a quality equal to that of the manufacturer's commercial equipment of the type specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The Inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in-the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified herein, all inspections, tests, and examinations shall be performed in the manufacturer's designated indoor test area under the ambient temperature, relative humidity, and the air pressure existing inside the building at the time the inspections, tests, and examinations are performed.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2.1), first article inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

shall consist of the examination in 4.6 and all tests in 4.7. Failure of the item to pass the examination and all tests shall be cause for rejection.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each item prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2.1), quality conformance inspection shall consist of the examination in 4.6, the test in 4.7.1, and the inspection in 4.8. Failure of the item to pass the examination, the test, and the inspection shall be cause for rejection.

4.6 Examination. The machine shall be visually examined to determine compliance with all requirements of this specification.

4.7 Tests. .

4.7.1 Operational test. The machine shall be operated at no load for not less than 30 minutes, Proper operation of all controls, motors, adjusting mechanisms, and accessories shall be verified during the trial period.

4.7.2 Performance test. The bending machine shall be tested by bending two circular shaped tests pieces from angle iron of not less than 60,000 psi tensile strength. one bend shall be made with the leg-in and the second bend shall be made with the leg-out. The dimensions of the test pieces shall conform to the applicable table I, II, III, IV, or V, for the type, class, and size bending machine being tested. The formed test pieces shall be round within 5 percent of the diameter. The finished product shall have a minimum diameter conforming to the full capacity width and thickness as specified in tables I through V. The workpiece contact surface of all bending rolls shall be free of defects and deformation upon completion of the performance test, Multiple passes of up to four are acceptable in this test.

4.7.3 Electromagnetic interference control tests. Equipment requiring electromagnetic interference control shall be tested for compliance with 3.3.8.

4.8 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Preservation, packing, and marking. Unless otherwise specified, preservation, packing, and marking shall be in accordance with ASTM D 3951. When specified (see 6.2.1), level A preservation, level A or level B packing, and marking shall be accomplished in accordance with MIL-M-18058.

6. NOTES

6.1 Intended use. Bending machines covered by this specification are intended for use in manufacturing and repair facilities to cold bend structural shaped workplaces into circular or radial parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type, class, and size required (see 1.2).

c. First article, if required (see 3.1).

d. If the bending roll is required to be configured in a specific measurement system (US or SI), state required system (see 3.2.1).

e. If measuring and indicating devices are required to be graduated in a specific measurement system (US or SI), state required system (see 3,2.1.1).

f. Dual calibrations (US or SI), if required (see 3.2.1.2).

g" Additional safety and health requirements, if required (see 3.2.5).

h. Painting, if different (see 3.3.5).

i. If electromagnetic interference control is required, specify the equipment and subsystem class and the emission and susceptibility required (see 3.3.8).

j. Specify and fully describe additional type bending rolls (see 3.4.4).

k. If a specific type drive system is required, specify type (see 3.4.5).

1. Adjustable roll position control, if different (see 3.4.8).

m. Electrical system and input power, if different (see 3.4.11).

n. Motor enclosure, if different (see 3.4.11.1).

o. Size and capacity, if different (see 3.5).

P. Additional performance features, if required (see 3.6.1).

q. Standard equipment, if different (see 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

r. Specify and fully describe optional equipment, if required (see 3.8).

s. Specify applicable repair parts, if required (see 3.9).

t. Lubrication chart or plate, if different (see 3.10.1).

u. Nameplate, if different (see 3.10.2).

v. Hour meter, if not required (see 3.11).

w. First article inspection, if different (see 4.4).

x. Quality conformance inspection, if different (see 4.5).

y. If preservation, packing, and marking in accordance with MIL-M-18058 is required, specify level required (see 5.1).

6.2.2 Contract data requirements. Required technical data, such as operator's manuals, parts lists, wiring diagrams, foundation and anchor bolt plans, and acceptance test reports, should be specified on a DD Form 1423, Contract Data Requirements List, incorporated into the contract.

6.3 First article. When first article inspection is required, the item to be tested shouTd be the first item offered for acceptance under the contract. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Safety and health requirements. Paragraph 3.2.5 requires compliance only with those OSHA requirements that concern the bending machine itself. It does not require compliance with those OSHA requirements that concern the machine in its operating environment such as noise levels, radiation levels, electromagnetic emissions, noxious vapors, air contaminants, and heat. OSHA limits the total hazard level of these hazards in the environment and does not limit the hazard level of individual machines in the environment. The procuring activity is advised to analyze the existing hazard levels in the proposed operating environment, and specify additional machine requirements that will integrate the new machine into its future operating environment. The bending machine shall be equipped with all point-of-operation guarding normally furnished as standard on the manufacturer's commercial machine supplied to the commercial market. If specific point-of-operation guarding is required, the procuring activity should specify the exact configuration of the guard required because the guard configuration is dependent on the size and configuration of the workpieces. The above, and any other additional safety and health requirements should be specified in detail under 6.2.1 (g).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

6,5 Cross-reference of classification changes. Machine classification changes from previous issue of this specification are as follows:

a. Title changed from Bending Machines, Angles, Bar, and Shapes, Vertical Plane, Power Operated to Bending Machine, Angles, Bars, and Shapes, Vertical Bending Plane or Horizontal Bending Plane, Power Operated.

b. Machine classification changes from previous issue of this specification are as follows:

MIL-B-80115A	MIL-B-80115B
Type I	Type I, class A
Size 1	Size 1 (Deleted)
Size 2	Size 2
	Size 2a (New size)
Size 3	Size 3
Size 4	Size 4 (Deleted)
	Size 5 thru 9 (New sizes)
	Type I, class B (New class)
	Sizes 1 thru 10 (New sizes)
Type II	Type II, class A
Size 1	Size 1 (Deleted)
Size 2	Size 2 (Deleted)
	Sizes 3 thru 14 (New sizes)
	Type II, class B (New class)
	Sizes 1 thru 9 (New sizes)
Type III	Type III (Deleted)
	Type IV (New type)
	Size 1 (New size)
	Size 2 (New size)

6.6 Subject term (key word) listing.

Angle, iron
Bending, machine
Cylindrical, shapes
Forming
Machine, shop
Power, operated
Rolls, bending
Structural, material

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - AR
Air Force - 99

Review activities:
Air Force - 84
DLA - GS

User activities:
Navy - MC, YD, SH

Preparing activity:
DLA - IP

(Project 3441-0114)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use i submitting comments and suggestions for improvements. All users of military standardization documents are invited to provid suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, an mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY
Commander
Defense Industrial Plant Equipment Center
ATTN: DIPEC-SSG
Memphis, TN 38114-5297

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Commander
Defense Industrial Plant Equipment Center
ATTN: DIPEC-SSG
Memphis, TN 38114-5297

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-80115B	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:39Z
Check the source to verify that this is the current version before use.