
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, STEP-DOWN, CATEGORY 1A (FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

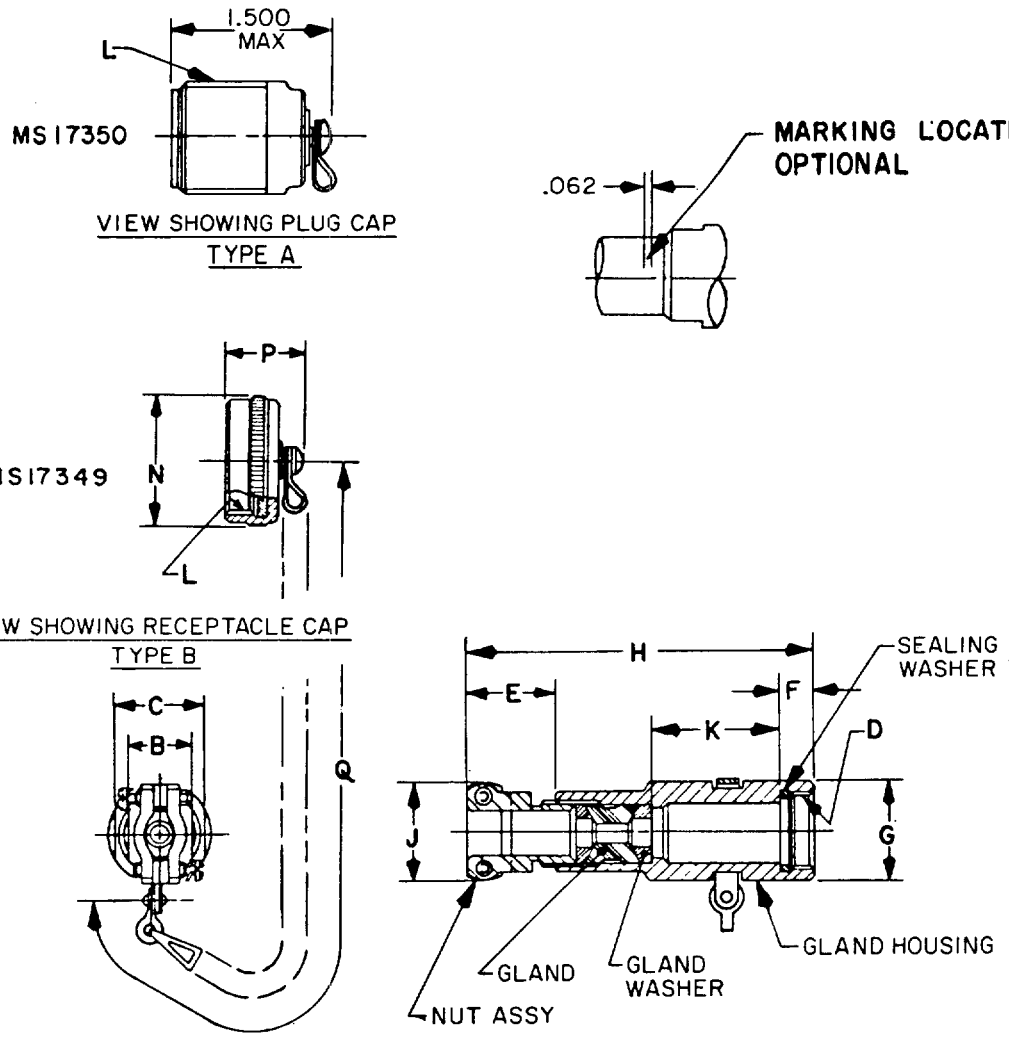

CONFIGURATION A. Style 1 cable sealing.

FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

SIZE NO.	SHELL SIZE	CABLE RANGE MAX DIA	CABLE RANGE MIN DIA	B +.000 −.010	C +.000 −.010	D THREAD CLASS 2B-LH	E FREE LENGTH MAX	F ±.016	G DIA +.010 −.020	H MAX	J +.031	K +.015 −.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	0.250	0.156	0.625	0.812	.7500-20 UNEF	0.906	.479	0.938	3.182	0.938	0.563	0.8750-0.1P-0.2L-DS	1.094	0.765	5.00
2	18	.375	.281	.750	1.125	1.1250-18 NEF	.969		1.312	3.901	1.062	1.157	1.2500-0.1P-0.2L-DS	1.469	980	
3		.375	.281	.875			.969			3.932	1.125	1.125				
4		.281	.188	.750			.969			3.901	1.062	1.157				
5		.605	.511	1.000			1.062			4.177	1.375	1.121				
6	18	.530	.436	1.000	1.125	1.1250-18 NEF			1.312	4.177	1.375	1.121	1.2500-0.1P-0.2L-DS	1.469		
7	20	.699	.605	1.062	1.250	1.2500-18 NEF			1.438	4.489	1.562	1.371	1.3750-0.1P-0.2L-DS	1.562		
8	20	.455	.361	1.062	1.250	1.2500-18 NEF			1.438	4.489	1.562	1.371	1.3750-0.1P-0.2L-DS	1.562		
9	20	.605	.511	1.000	1.250	1.2500-18 NEF	1.062		1.438	4.306	1.375	1.250	1.3750-0.1P-0.2L-DS	1.562		5.00
10	22	.562	.449	1.188	1.406	1.3750-18 NEF	1.094		1.562	4.584	1.688	1.343	1.5000-0.1P-0.2L-DS	1.688		6.00
11	22	.405	.311	1.000	1.375	1.3750-18 NEF	1.062		1.562	4.306	1.375	1.250	1.5000-0.1P-0.2L-DS	1.688		
12	22	.828	.715	1.188	1.406	1.3750-18NEF	1.094		1.562	4.584	1.688	1.343	1.5000-0.1P-0.2L-DS	1.688		
13	24	.900	.787	1.312	1.625	1.6250-18 NEF			1.812	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938		
14		.630	.517													
15		.750	.637													
16		.970	.857	1.312						4.647	1.812	1.371				
17		.828	.715	1.188						4.542	1.688	1.301				
18	24	.805	.692	1.312	1.625	1.6250-18NEF	1.094		1.812	4.647	1.812	1.371	1.7500-0.1P-0.2L-DS	1.938		
19	28	.880	.755	1.546	1.875	1.8750-16 UN	1.281		2.062	4.896	2.125		2.0000-0.1P-0.2L-DS	2.219		
20		1.109	.984	1.546			1.281			4.896	2.125					
21		0.750	.637	1.312			1.094			4.647	1.812	1.371				
22		.375	.281	0.875			0.969			4.229	1.125	1.422				
23		.970	.857	1.312			1.094			4.647	1.812	1.371				
24		1.000	.875	1.546	1.875		1.281			4.896	2.125	1.371				
25		0.530	.436	1.000	1.812		1.062			4.431	1.375	1.375				
26	28	.680	.567	1.312	1.875	1.8750-16UN	1.094	.479	2.062	4.647	1.812	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00

CONFIGURATION 1A. Style 1 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

SIZE NO.	SHELL SIZE	CABLE RANGE MAX DIA	CABLE RANGE MIN DIA	B +.000 −.010	C +.000 −.010	D THREAD CLASS 2B-LH	E FREE LENGTH MAX	F ±.016	G DIA +.010 −.020	H MAX	J ±.031	K +.015 −.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
27	32	1.055	0.930	1.546	2.062	2.0625-16N	1.281	.479	2.312	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	0.980	6.00
28	↑	1.230	1.105	1.780	↑	↑	1.281	↑	↑	4.959	2.469	1.372	↑	↑	↑	↑
29		0.750	0.637	1.312	↓	↓	1.094	↓	↓	4.647	1.812	1.371	↓	↓	↓	↓
30		.880	.755	1.546			1.281			4.896	2.125	↑				
31		1.109	.984	1.546			1.281			4.896	2.125	↓				
32		0.970	.857	1.312			1.094			4.647	1.812	1.371				
33		.375	.281	0.875	2.062		0.969			4.276	1.125	1.469				
34	↓	.530	.436	1.000	2.000	↓	1.062	↓	↓	4.431	1.375	1.375	↓	↓	↓	↓
35	32	1.130	1.005	1.780	2.062	2.0625-16N	1.281		2.312	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.469		
36	36	1.310	1.185	1.780	2.312	2.3125-16N	↑		2.562	4.959	2.469	1.372	2.5000-0.1P-0.2L-DS	2.719		
37	↑	1.109	0.984	1.546	↑	↑			↑	4.896	2.125	1.371	↑	↑		
38		1.375	1.250	2.000	↓	↓				5.021	2.625	1.371				
39		1.180	1.055	1.780			↓			4.959	2.469	1.372				
40		1.445	1.320	2.000	2.312		1.281			5.021	2.625	1.371				
41	↓	0.970	0.857	1.312	2.250	↓	1.094	↓	↓	4.651	1.812	1.375	↓	↓	↓	↓
42	36	1.230	1.105	1.780	2.312	2.3125-16N	1.281	.479	2.562	4.959	2.469	1.372	2.5000-0.1P-0.2L-DS	2.719		
43	40	1.940	1.815	2.438	2.750	2.6250-16UN	1.391	.667	2.875	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969		
44	↑	1.825	1.700	2.438	↑	↑	1.391	↑	↑	6.354	3.171	↑	↑	↑	↑	↑
45	↓	1.730	1.605	2.438	↓	↓	1.391	↓	↓	6.354	3.171	↓	↓	↓	↓	↓
46	40	1.656	1.531	2.250	2.750	2.6250-16UN	1.281	.667	2.875	6.057	2.953	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00

CONFIGURATION 1A. Style 1 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

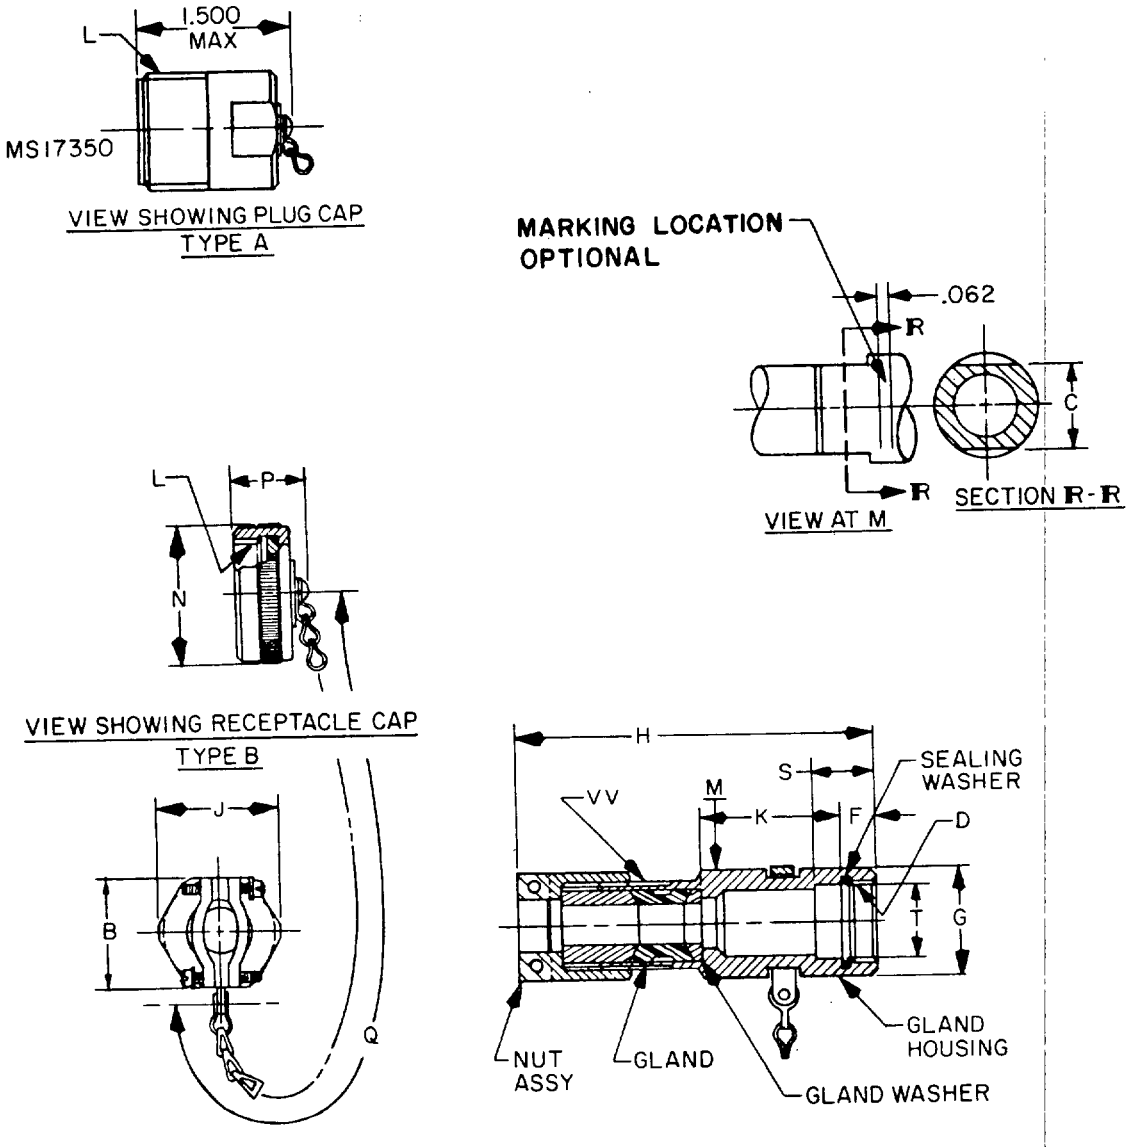

CONFIGURATION 1B. Style 2 cable sealing.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.


SIZE NO.	SHELL SIZE	CABLE RANGE MAX.	CABLE RANGE MIN.	B ±.005	C +.000 -.010	D THREAD CLASS 2B LH	F ±.016	G DIA. +.010 -.020	H MAX.
1	12	.280	.130	.969	.812	.7500-20 UNEF	.479	.938	4.000
2	14	.396	.246	1.094	.938	.8750-20 UNEF	↑	1.062	4.100
3	16	.521	.321	1.219	1.062	1.0000-20 UNEF		1.188	4.400
4	18	.646	.446	1.344	1.125	1.1250-18 NEF		1.312	4.600
5	18	.475	.300	1.344	1.125	1.1250-18 NEF		1.312	4.600
6	20	.765	.565	1.469	1.250	1.2500-18 NEF		1.438	4.900
7	20	.600	.400	1.469	1.250	1.2500-18 NEF		1.438	↑
8	22	.890	.690	1.625	1.375	1.3750-18 NEF		1.562	
9	22	.700	.500	1.625	1.375	1.3750-18 NEF		1.562	↓
10	22	.525	.400	1.625	1.375	1.3750-18 NEF		1.562	4.900
11	24	1.015	.815	1.750	1.625	1.6250-18 NEF		1.812	5.000
12	24	.815	.595	1.750	1.625	1.6250-18 NEF		1.812	5.000
13	28	1.180	.980	2.000	1.875	1.8750-18 UN		2.062	5.300
14	28	.980	.780	2.000	1.875	1.8750-18 UN		2.062	5.300
15	32	1.430	1.230	2.250	2.062	2.0625-16 N		2.312	5.600
16	32	1.230	1.030	2.250	2.062	2.0625-16 N		2.312	5.600
17	36	1.670	1.470	2.500	2.312	2.3125-16 N	↓	2.562	5.600
18	36	1.470	1.270	2.500	2.312	2.3125-16 N	.479	2.562	5.600
19	40	1.860	1.660	2.750	2.562	2.6250-16 UN	.667	2.875	5.725
20	40	1.660	1.400	2.750	2.562	2.6250-16 UN	.667	2.875	5.725

SIZE NO.	SHELL SIZE	J MAX.	K ±.010	L THREAD CLASS 2A/B	N DIA. MAX.	P MAX.	Q WITHIN ONE LINK	S ±.010	T DIA. ±.005	VV GLAND THREADS PLATED CLASS 2 - LH
1	12	1.000	.950	0.8750-0.1P-0.2L-DS	1.094	.765	5.00	1.425	.600	.8125-20 UNEF
2	14	1.110	1.075	1.0000-0.1P-0.2L-DS	1.219	.765	↑	1.425	.726	.9375-20 UNEF
3	16	1.320	1.200	1.1250-0.1P-0.2L-DS	1.344	.980		1.605	.845	1.0625-18 NEF
4	18	1.420	1.325	1.2500-0.1P-0.2L-DS	1.469	↑		↑	.970	1.1875-18 NEF
5	18	1.420	↑	1.2500-0.1P-0.2L-DS	1.469				.970	1.875-18 NEF
6	20	1.600		1.3750-0.1P-0.2L-DS	1.562		↓		1.095	1.3125-18 NEF
7	20	1.600		1.3750-0.1P-0.2L-DS	1.562		5.00		1.095	1.3125-18 NEF
8	22	1.750		1.5000-0.1P-0.2L-DS	1.688		6.00		1.220	1.4375-18 NEF
9	22	1.750	↓	1.5000-0.1P-0.2L-DS	1.688		↑		1.220	1.4375-18 NEF
10	22	1.750	1.325	1.5000-0.1P-0.2L-DS	1.688				1.220	1.4375-18 NEF
11	24	1.900	1.450	1.7500-0.1P-0.2L-DS	1.938				1.470	1.5625-18 NEF
12	24	1.900	1.450	1.7500-0.1P-0.2L-DS	1.938				1.470	1.5625-18 NEF
13	28	2.190	1.700	2.0000-0.1P-0.2L-DS	2.219				1.713	1.8125-16 N
14	28	2.190	1.700	2.0000-0.1P-0.2L-DS	2.219				1.713	1.8125-16 N
15	32	2.475	1.950	2.2500-0.1P-0.2L-DS	2.469				1.900	2.0625-16 N
16	32	2.475	↑	2.2500-0.1P-0.2L-DS	2.469				1.900	2.0625-16 N
17	36	2.715		2.5000-0.1P-0.2L-DS	2.719				2.150	2.3125-16 N
18	36	2.715		2.5000-0.1P-0.2L-DS	2.719				2.150	2.3125-16 N
19	40	2.900		2.7500-0.1P-0.2L-DS	2.969	↓	↓	↓	2.460	2.5000-16 UN
20	40	2.900	1.950	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.5000-16 UN

CONFIGURATION 1B. Style 2 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

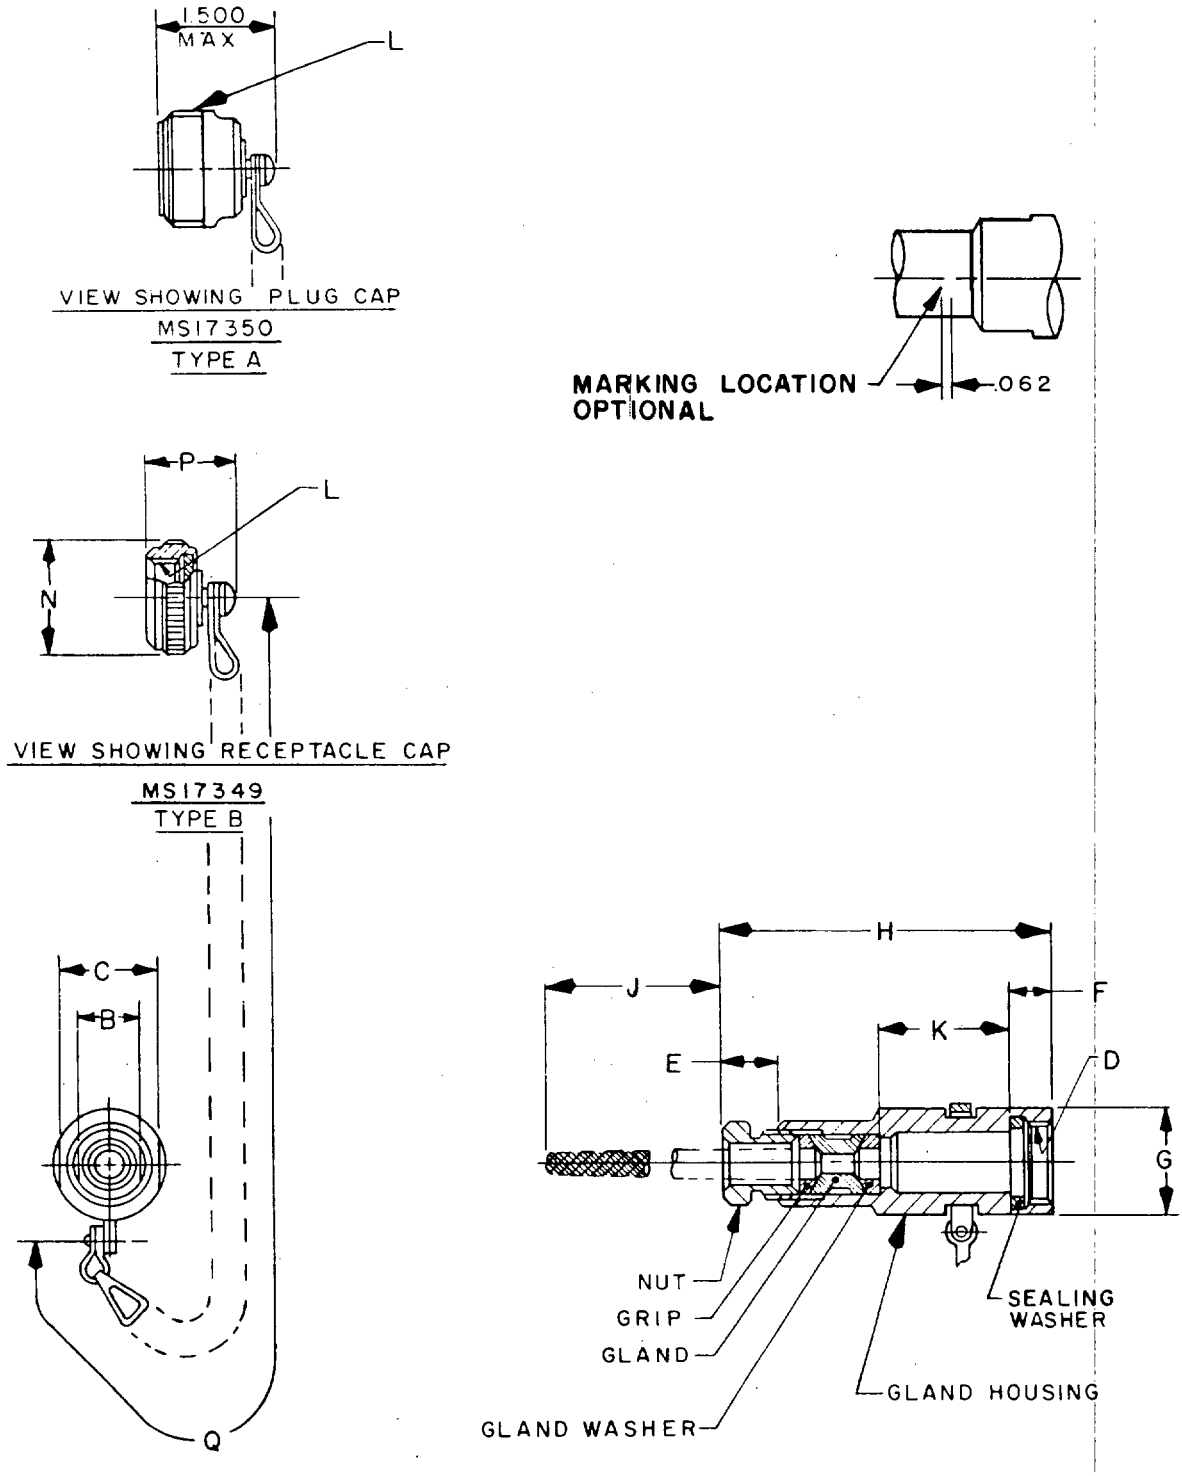

CONFIGURATION 1C. Style 3 cable sealing and gripping.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

SIZE NO.	SHELL SIZE	CABLE RANGE MAX DIA	CABLE RANGE MIN DIA	B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LG MAX	F ±.016	G DIA +.010 -.020	H MAX	J APPROX FREE LG	K +.015 -.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	.222	.160	.625	.812	.7500-20 UNEF	.476	.479	.938	2.752	2.406	.563	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	18	.605	.511	1.000	1.125	1.1250-18UNEF	.597	↑	1.312	3.712	5.188	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	↑
3	18	.530	.436	1.000	1.125	1.1250-18UNEF	.597		1.312	3.712	4.688	1.121	1.2500-0.1P-0.2L-DS	1.469	↑	
4	18	.375	.306	.875	1.125	1.1250-18UNEF	.539		1.312	3.502	3.844	1.125	1.2500-0.1P-0.2L-DS	1.469		
5	18	.281	.219	.750	1.125	1.1250-18UNEF	.539		1.312	3.471	2.844	1.157	1.2500-0.1P-0.2L-DS	1.469		
6	20	.699	.605	1.062	1.250	1.2500-18UNEF	.597		1.438	4.024	6.188	1.371	1.3750-0.1P-0.2L-DS	1.562		
7	20	.605	.511	1.000	1.250	1.2500-18UNEF	↑		1.438	3.841	5.188	1.250	1.3750-0.1P-0.2L-DS	1.562		↓
8	20	.455	.361	1.062	1.250	1.2500-18UNEF			1.438	4.024	4.188	1.371	1.3750-0.1P-0.2L-DS	1.562		5.00
9	22	.828	.715	1.125	1.406	1.3750-18UNEF			1.562	4.087	6.688	1.343	1.5000-0.1P-0.2L-DS	1.688		6.00
10	22	.562	.449	1.125	1.406	1.3750-18UNEF			1.562	4.087	5.188	1.343	1.5000-0.1P-0.2L-DS	1.688		↑
11	22	.405	.316	1.000	1.375	1.3750-18UNEF			1.562	3.841	3.688	1.250	1.5000-0.1P-0.2L-DS	1.688		
12	24	.805	.692	1.250	1.625	1.6250-18UNEF			1.812	4.150	6.688	1.371	1.7500-0.1P-0.2L-DS	1.938		
13	24	.750	.637	1.250	1.625	1.6250-18UNEF			1.812	4.150	6.688	↑	1.7500-0.1P-0.2L-DS	1.938		
14	24	.630	.517	1.250	1.625	1.6250-18UNEF			1.812	4.150	5.688		1.7500-0.1P-0.2L-DS	1.938		
15	28	1.109	.984	1.500	1.875	1.8750-16UN			2.062	4.212	7.688		2.0000-0.1P-0.2L-DS	2.219		
16	28	1.000	.875	1.500	↑	↑			↑	4.212	7.188		↑	↑		
17	28	.880	.755	1.500						4.212	6.688					
18	28	.750	.637	1.250						4.150	6.688					
19	28	.680	.567	1.250	1.875					4.150	6.688	1.371				
20	28	.530	.436	1.000	1.812		.597			3.966	4.688	1.375				
21	28	.375	.306	.875	1.875	1.8750-16UN	.539		2.062	3.799	3.844	1.422	2.0000-0.1P-0.2L-DS	2.219		
22	32	1.230	1.105	1.750	2.062	2.0625-16UN	.597		2.312	4.275	8.188	1.372	2.2500-0.1P-0.2L-DS	2.469		
23	32	1.130	1.005	1.750	2.062	↑	↑		↑	4.275	7.188	1.372	↑	↑		
24	32	1.055	.930	1.500	↑					4.212	7.688	1.371				
25	32	.970	.857	1.250						4.150	7.188	1.371				
26	32	.880	.755	1.500						4.212	6.688	1.371				
27	32	.750	.637	1.250	2.062					4.150	6.688	1.371				
28	32	.530	.436	1.000	2.000		.597			3.966	4.688	1.375				
29	32	.375	.306	.875	2.062	2.0625-16UN	.539		2.312	3.846	3.844	1.469	2.2500-0.1P-0.2L-DS	2.469		
30	36	1.445	1.320	2.000	2.312	2.3125-16UN	.597		2.562	4.337	9.688	1.371	2.5000-0.1P-0.2L-DS	2.719		
31	36	1.375	1.250	2.000	↑	↑	↑		↑	4.337	9.688	1.371	↑	↑		
32	36	1.310	1.185	1.750						4.275	8.688	1.372				
33	36	1.230	1.105	1.750						4.275	8.188	1.372				
34	36	1.180	1.055	1.750						4.275	8.188	1.372				
35	36	1.109	.984	1.500	2.312					4.212	7.688	1.371				
36	36	.970	.857	1.250	2.250	2.3125-16UN	.597	.479	2.562	4.154	7.188	1.375	2.5000-0.1P-0.2L-DS	2.719		
37	40	1.940	1.815	2.438	2.750	2.6250-16UN	.710	.667	2.875	5.673	13.688	2.156	2.7500-0.1P-0.2L-DS	2.969		
38	40	1.825	1.700	2.438	↑	↑	.710	↑	↑	5.673	13.688	↑	↑	↑		
39	40	1.730	1.605	2.438			.710			5.673	13.688					
40	40	1.656	1.531	2.250	2.750	2.6250-16UN	.597	.667	2.875	5.373	12.688	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00

CONFIGURATION 1C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	1.375	34.92	2.125	53.98	2.953	75.01	4.306	109.37	4.900	124.46
.020	.51	1.420	36.07	2.190	55.63	3.171	80.54	4.400	111.76	4.959	125.96
.031	.79	1.438	36.53	2.312	58.72	3.182	80.82	4.431	112.55	5.000	127.00
.938	23.83	1.562	39.67	2.469	62.71	3.901	99.09	4.489	114.02	5.021	127.53
1.000	25.40	1.600	40.64	2.475	62.86	3.932	99.87	4.542	115.37	5.300	134.62
1.062	26.97	1.688	42.88	2.562	65.07	4.000	101.60	4.584	116.43	5.600	142.24
1.110	28.19	1.750	44.45	2.625	66.68	4.100	104.14	4.600	116.84	5.725	145.42
1.125	28.58	1.812	46.02	2.715	68.96	4.177	106.10	4.647	118.03	6.057	153.85
1.312	33.32	1.900	48.26	2.875	73.02	4.229	107.42	4.651	118.14	6.354	161.39
1.320	33.53	2.062	52.37	2.900	73.66	4.276	108.61	4.896	124.36		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).
4. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Accessories shall be designated type A and B.
- Type A is for use with MS17344.
- Type B is for use with MS17343, MS17345, and MS17347.


The backshell, cap and chain is considered the complete accessory to be supplied.

Material and finish: See table I.
Connectors and their associated accessories shall be of the same finish.


TABLE I. Material and finish.

Component	Material	Finish
Accessory body and cap	High grade aluminum alloy in accordance with MIL-C-85049	A, W
Chain	Corrosion resistant steel, Type II, Class 3, Trade number 8 of RR-C-271	Passivated
Gasket and gland	Rubber, in accordance with MIL-R-3065	

Part number: See examples below:
For styles 1 and 2:

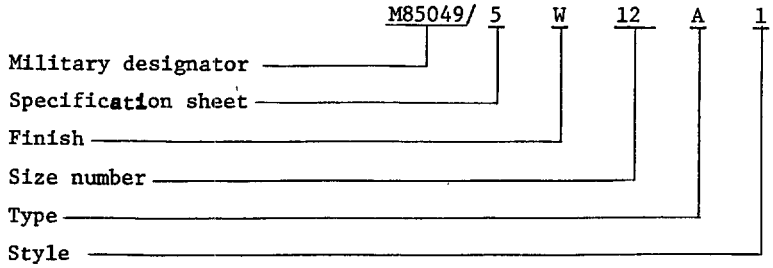

For style 3:

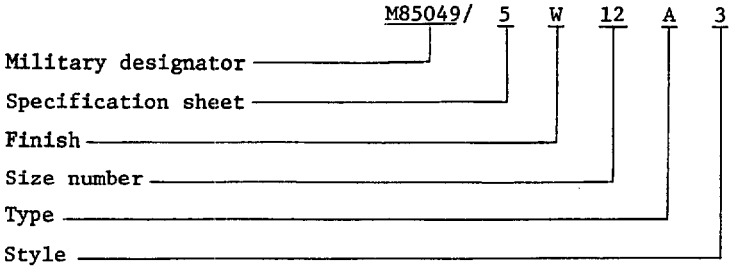

Simplified assembly instructions shall be packaged with each accessory.


Application:
These accessories are for use with connectors specified on MS17343, MS17344, MS17345 and MS17347.
- Styles 1 and 3 are for use with classes R and C.
- Style 2 is for use with classes R, C and J.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Qualification:
See MIL-C-85049, category 1A.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data:

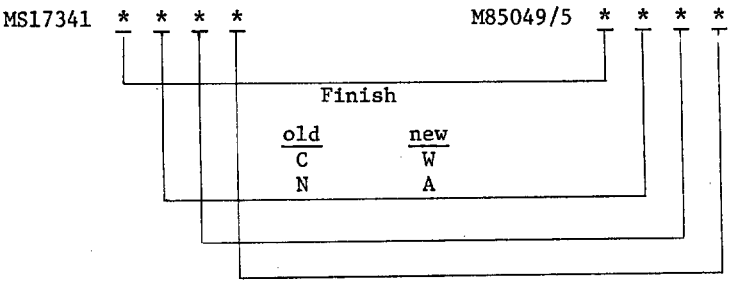

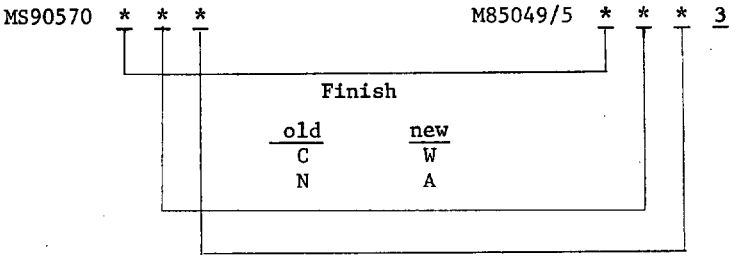

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3067-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command (ELEX 8111)
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.