# MILITARY SPECIFICATION

## STRIP, AMMUNITION, METALLIC, 30MM

This Specification is approved for use withing the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This Specification covers the requirements, quality assurance provisions and packaging for metallic ammunition strips for 30mm ammunition

## 2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1Specification, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in issue of the Department of Defense Index of Specification and Standards (DoDISS)and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-W-63150 - Weapons and Support Materiel, Standard Quality Assurance Provisions for

STANDARDS

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1168 - Ammunition Lot Numbering

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament, Munitions, and Chemical Command, Attn. AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1305

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2025-12-10T21:30:17Z
Check the source to verify that this is the current version before use.

MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1235 - Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should by obtained from the contracting activity or as directed by the contracting officer).

2.1.2 Other Government documents, drawings,publications. The following other government documents drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of the solicitation.

DRAWINGS

U.S. ARMY ARMAMENT, RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

12902719 - Strip, Ammunition Metallic, 30mm
11825947 - Cartridge, 30mm M788, TP
11825954 - Cartridge, 30mm, M789 HEDP
11829935 - Cartridge, 30mm, Dummy, M848
12598682 - Cartridge, 30mm HEDP XM949
12598683 - Cartridge, 30mm TP XM950

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of . documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E18 - Tests for Rockwell Hardness of Metallic Materials
ASTM B117 - Salt Spray (Fog) Testing

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials 1916 Race Street, Philadelphia, Pa 19103)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflic between the text of this specification and the reference cited herein (except for related associated detail specifications, specification sheets or MS standards) , the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Material shall be in accordance with the applicable drawings and specifications.

3.2 Strip. The strip shall comply with all requirements on Drawing (Dwg.) 12902719, all associated drawings, and with all requirements specified in applicable specifications.

3.3 Manufacturing process. The strips shall be manufactured by the identical process used for first article sample and no deviation from the process shall be made without prior approval of the contracting officer.

3.4 Snap in assembly. The maximum force required to snap an M848 dummy cartridge into any round position on the ammunition strip shall not exceed (TBD) pounds.

3.5 Push out (nose). The force required to disassemble the nose end of an M848 dummy cartridge from the ammunition strip shall be not less than (TBD) pounds nor more than (TBD) pounds.

3.6 Hardness. The uncoated strip shall comply with the hardness requirement of Note 8 specified on Dwg. 12902719.

3.7 Functioning. The strip shall be capable of being assembled with 30mm cartridges and cycled through AH64 Uploader/Downloader system without binding, cracking, breaking, separating or causing a malfunction.

3.8 Corrosion resistance. The strip, finished in accordance with Note 7 of Dwg. 12902719, shall be exposed for 24 hours of salt spray (fog) testing. After exposure, the strip shall exhibit no corrosion in excess of (TBD) disregarding cut edges for this requirement.

3.9 Workmanship. The requirements for workmanship shall be in accordance with MIL-W-63150, applicable drawings, referenced specifications and the following:

3.9.1 Metal defects. The strip shall be free of blisters, seams, laminations, deep scratches and porosity. Cracks or tears are not permitted in radii leading into each loop of the strip.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

3.9.2 Burrs. All surfaces of the strip shall be free of any rough edge which could cause definite removal of metal from the cartridge case or injure personnel during handling.

3.9.3 Foreign matter. No strip shall contain chips, dirt, grease, rust, corrosion, or other foreign matter.

4. QUALITY ASSURANCE PROVISION

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable- for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define terms used herein.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this specification shall not relieve the contractor of the responsibility for assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

4.2 Classification of inspection. The inspection requirements specified herein are classed as follows:

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)

4.2.1 Inspection conditions. Unless otherwise specified, all inspection shall be performed in accordance with the test conditions specified in the retirements and test method paragraphs in this specification and all requirements of the applicable drawings.

4.3. First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2. The first article shall consist of the following items in quantities as indicated:



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

| Part Description | Drawing | Quantity |
|---|---|---|
| Strip, Ammunition, Mettalic 30mm | 12902719 | TBD |

4.3.2 Inspections to be performed. See MIL-W-63150 and Table I herein. First article sample may be subjected by the government to any or all of the examinations and tests specified in this specification and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any ammunition strip or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon failure of any ammunition strip or test specimen in the sample to comply with any of the stated requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

**CLASSIFICATION OF DEFECTS & TESTS** MIL-S-70745 (AR)

| PARAGRAPH | TITLE | | SHEET 1 OF 1 | | DRAWING NUMBER |
|---|---|---|---|---|---|
| | Strip, Ammunition, Metallic, 30mm | | | | 12902719 |
| | | | | | NEXT HIGHER ASSEMBLY |
| CATEGORY | EXAMINATION OR TEST | NO. OF SAMPLE UNITS | AQL OR 100% | REQUIREMENT PARAGRAPH | PARAGRAPH REFERENCE /INSPECTION METHOD |
| | Examination for defects | 150 | See 4.4.2.1 | 3.2 | |
| | Snap-in Assembly | 40 | 0-1 | 3.4 | 4.4.5.3 |
| | Push-out (nose) | 40 | 0-1 | 3.5 | 4.4.5.4 |
| | Hardness | 32 | 0-1 | 3.6 | 4.4.5.1 |
| | Corrosion resistance | 32 | 0-1 | 3.8 | 4.4.5.2 |
| | Functioning | 200 | 0-1 | 3.7 | 4.4.5.5 |

NOTES:

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:57Z
Check the source to verify that this is the current version before use.



Replaces DRSMC OA (D) Form 160, 1 Aug 83, which may not be used.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer? in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions the same specifications and accomplished with the provisions for submission of product as specified in MIL-STD-105. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements. Lot numbering, as required shall be in accordance with MIL-STD-1168.

4.4.2 Examination. The examination listed in 4.4.2.1 shall be performed on inspection lots a defined in 4.4.1

a. Critical and special defects. Unless otherwise specified, inspection for those defects shall be 100 percent and whenever possible utilize non-operator dependent test equipment. Rejected items shall be segregated and identified accordingly.

b. Sampling plans. Sampling plans are incorporated in this specification either by reference to appropriate military standards or by stipulating specific acceptance criteria. In cases where sampling is specified in accordance with MIL-STD-105, the contractor may request permission from the procuring activity to use an equivalent continuous sampling plan from MIL-STD-1235.

c. Major and minor defects. Major and minor defects shall be inspected by sampling to the AQL indicated in the Classification of Defects and Test paragraphs, unless 100 percent inspection is indicated.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

## CLASSIFICATION OF DEFECTS & TESTS



| PARAGRAPH | TITLE | | SHEET 1 OF 2 | | DRAWING NUMBER 12902719 |
|---|---|---|---|---|---|
| 4.4.2.1 | Strip, Ammunition, Metallic, 30mm | | | | NEXT HIGHER ASSEMBLY |
| CATEGORY | EXAMINATION OR TEST | NO. OF SAMPLE UNITS | AQL OR 100% | REQUIREMENT PARAGRAPH | PARAGRAPH REFERENCE /INSPECTION METHOD |
| CRITICAL | None defined | | | | |
| MAJOR | | See 4.4.2 1/ | | | |
| 101 | Centerline to centerline dimensions | | .40 | 3.2 | Gage |
| 102 | Hole centerline to edge | | .40 | 3.2 | Gage |
| 103 | Width | | .40 | 3.2 | Gage |
| 104 | Hole centerline to outer edge | | .40 | 3.2 | Gage |
| 105 | Hole centerline to tab inner edge | | .40 | 3.2 | Gage |
| 106 | Hole centerline distance | | .40 | 3.2 | Gage |
| 107 | Hole centerline to inner edge | | .40 | 3.2 | Gage |
| 108 | Hole centerline to flange edge | | .40 | 3.2 | Gage |
| 109 | Material thickness | | .40 | 3.2 | Gage |
| MINOR | | | | | |
| 201 | Retaining tab to centerline spread | | 4.0 | 3.2 | Gage |
| 202 | Location to angle center | | 4.0 | 3.2 | Gage |
| 203 | Tab bend angle | | 4.0 | 3.2 | Gage |
| 204 | Tab bend radius | | 4.0 | 3.2 | Gage |
| 205 | Tab base width | | 4.0 | 3.2 | Gage |
| 206 | Heal line angle location | | 4.0 | 3.2 | Gage |
| 207 | Tab closing angle | | 4.0 | 3.2 | Gage |
| 208 | Tab base width | | 4.0 | 3.2 | Gage |
| 209 | Tab base to centerline | | 4.0 | 3.2 | Gage |
| 210 | Diameter of tool holes | | 4.0 | 3.2 | Gage |
| 211 | Warpage | | 4.0 | 3.2 | Gage |
| 212 | Workmanship | | 6.5 | 3.2 | Visual |

NOTES: 1/ Samples shall be in accordance with MIL-STD-105, Level S-3 for each lot.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:57Z
Check the source to verify that this is the current version before use.

## QUALITY CONFORMANCE INSPECTION

## CLASSIFICATION OF DEFECTS & TESTS

| PARAGRAPH | TITLE | SHEET | DRAWING NUMBER |
|---|---|---|---|
| 4.4.2.1 | Strip, Ammunition, Metallic, 30mm | 2 OF 2 | 12902719 |
| | | | NEXT HIGHER ASSEMBLY |

| CATEGORY | EXAMINATION OR TEST | NO. OF SAMPLE UNITS | AQL OR 100% | REQUIREMENT PARAGRAPH | PARAGRAPH REFERENCE /INSPECTION METHOD |
|---|---|---|---|---|---|
| | TESTS | | | | |
| CRITICAL | None defined | | | | |
| MAJOR | | See 4.4.2 1/ | | | |
| 110. | Snap-in assembly | | .40 | 3.4 | 4.4.5.3 |
| 111. | Push-out (nose) | | .40 | 3.5 | 4.4.5.4 |
| 112. | Hardness | | .40 | 3.6 | 4.4.5.1 |
| 113. | Material Thickness | | .40 | 3.8 | 4.4.5.6 |

NOTES:

1/ Samples shall be in accordance with MIL-STD-105, Level S-3 for each lot.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:57Z
Check the source to verify that this is the current version before use.



Replaces DRSMC QA (D) Form 160, 1 Aug 83, which may not be used.

4.4.3 Testing. The tests listed in 4.4.2.1 shall be performed on Inspection lots as defined in 4.4.1. The sampling plans for testing shall conform to the provisions of 4.4.2.b above.

4.4.4 Inspection equipment. Requirements for inspection equipment to perform, examinations and tests are specifed herein. (See 6.3).

4.4.5 Methods of inspection.

4.4.5.1 Hardness. Hardness testing shall be conducted in accordance with ASTM method E18. Observation shall be made for compliance with 3.6.

4.4.5.2 Corrosion resistance. The test shall be conducted in accordance with ASTM-B117 and 3.8. Observation shall be made for compliance with the requirements of 3.8. Parts so tested shall not be returned to the lot.

4.4.5.3 Snap-in assembly. Place a dummy cartridge (M848) or approved alternate on top of the strip so that it is in a normal assembly position. Apply a gradual force (without impact loading) to the cartridge until assembly with the strip is completed. Observation shall be made for compliance with the requirements of 3040 Repeat the above procedure for all samples. See figure 1.

4.4.5.4 Push-out (nose). A strip loaded with dummy cartridges (M848) or approved alternates shall be assembled into the test fixture (see figure 2). A gradual force (without impact loading) shall then be applied to the cartridge until the nose end has completely separated from the strip. Observation shall be made for compliance with the requirements of 3.5. Repeat the above procedure for all samples disregarding the position of the sample strips.

4.4.5.5 Function test. Strips shall be tested by assembling the M848 Dummy 30mm Cartridges into strips and feeding the strips through an AH64 Uploader\Downloader system. The test shall be conducted at ambient temperature.

4.4.5.6 Inspection equipment. The inspection equipment required to perform the examinations and test prescribed herein is-described-in the “Paragraph Reference/Inspection Method” column in tables starting with Paragraph 4.4.2.1. The contractor shall “submit for approval inspection equipment designs in accordance with terms of the contract (see 6.3.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

## 5. PACKAGING

5.1 Packaging, packing and marking. The ammunition strips shall be preserved, packaged and packed in accordance with MIL-STD-1169 Level B to insure acceptance by common carrier for safe transportation at the lowest rate to the point of delivery. Marking for shipment shall be in accordance with the Instructions of the contract and shall comply with MIL-STD-1169 Level B. Bar coding, when required, shall be applied in accordance with MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

# SNAP IN FORCE TEST SET-UP


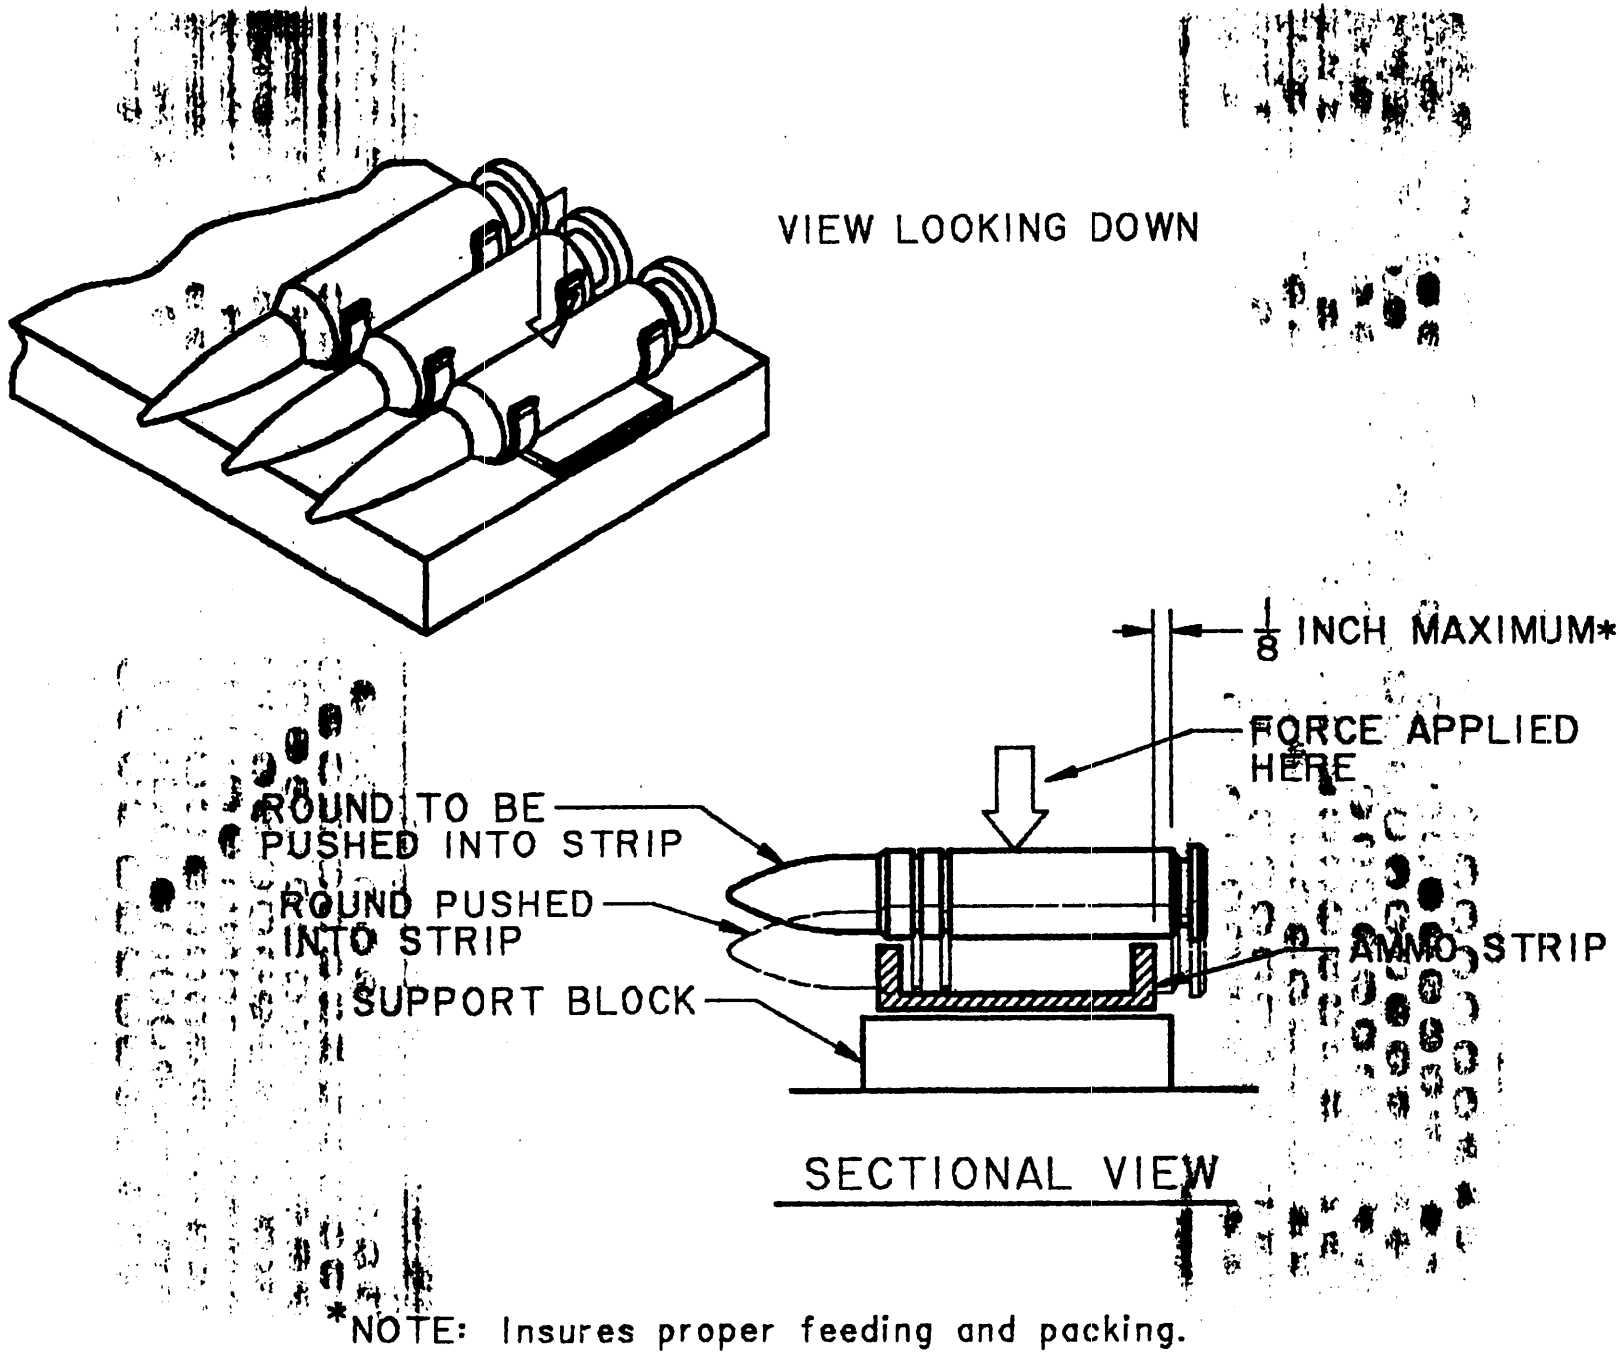



Fig 1. ROUND NOSE "SNAP IN FORCE" TEST SET-UP

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:57Z
Check the source to verify that this is the current version before use.



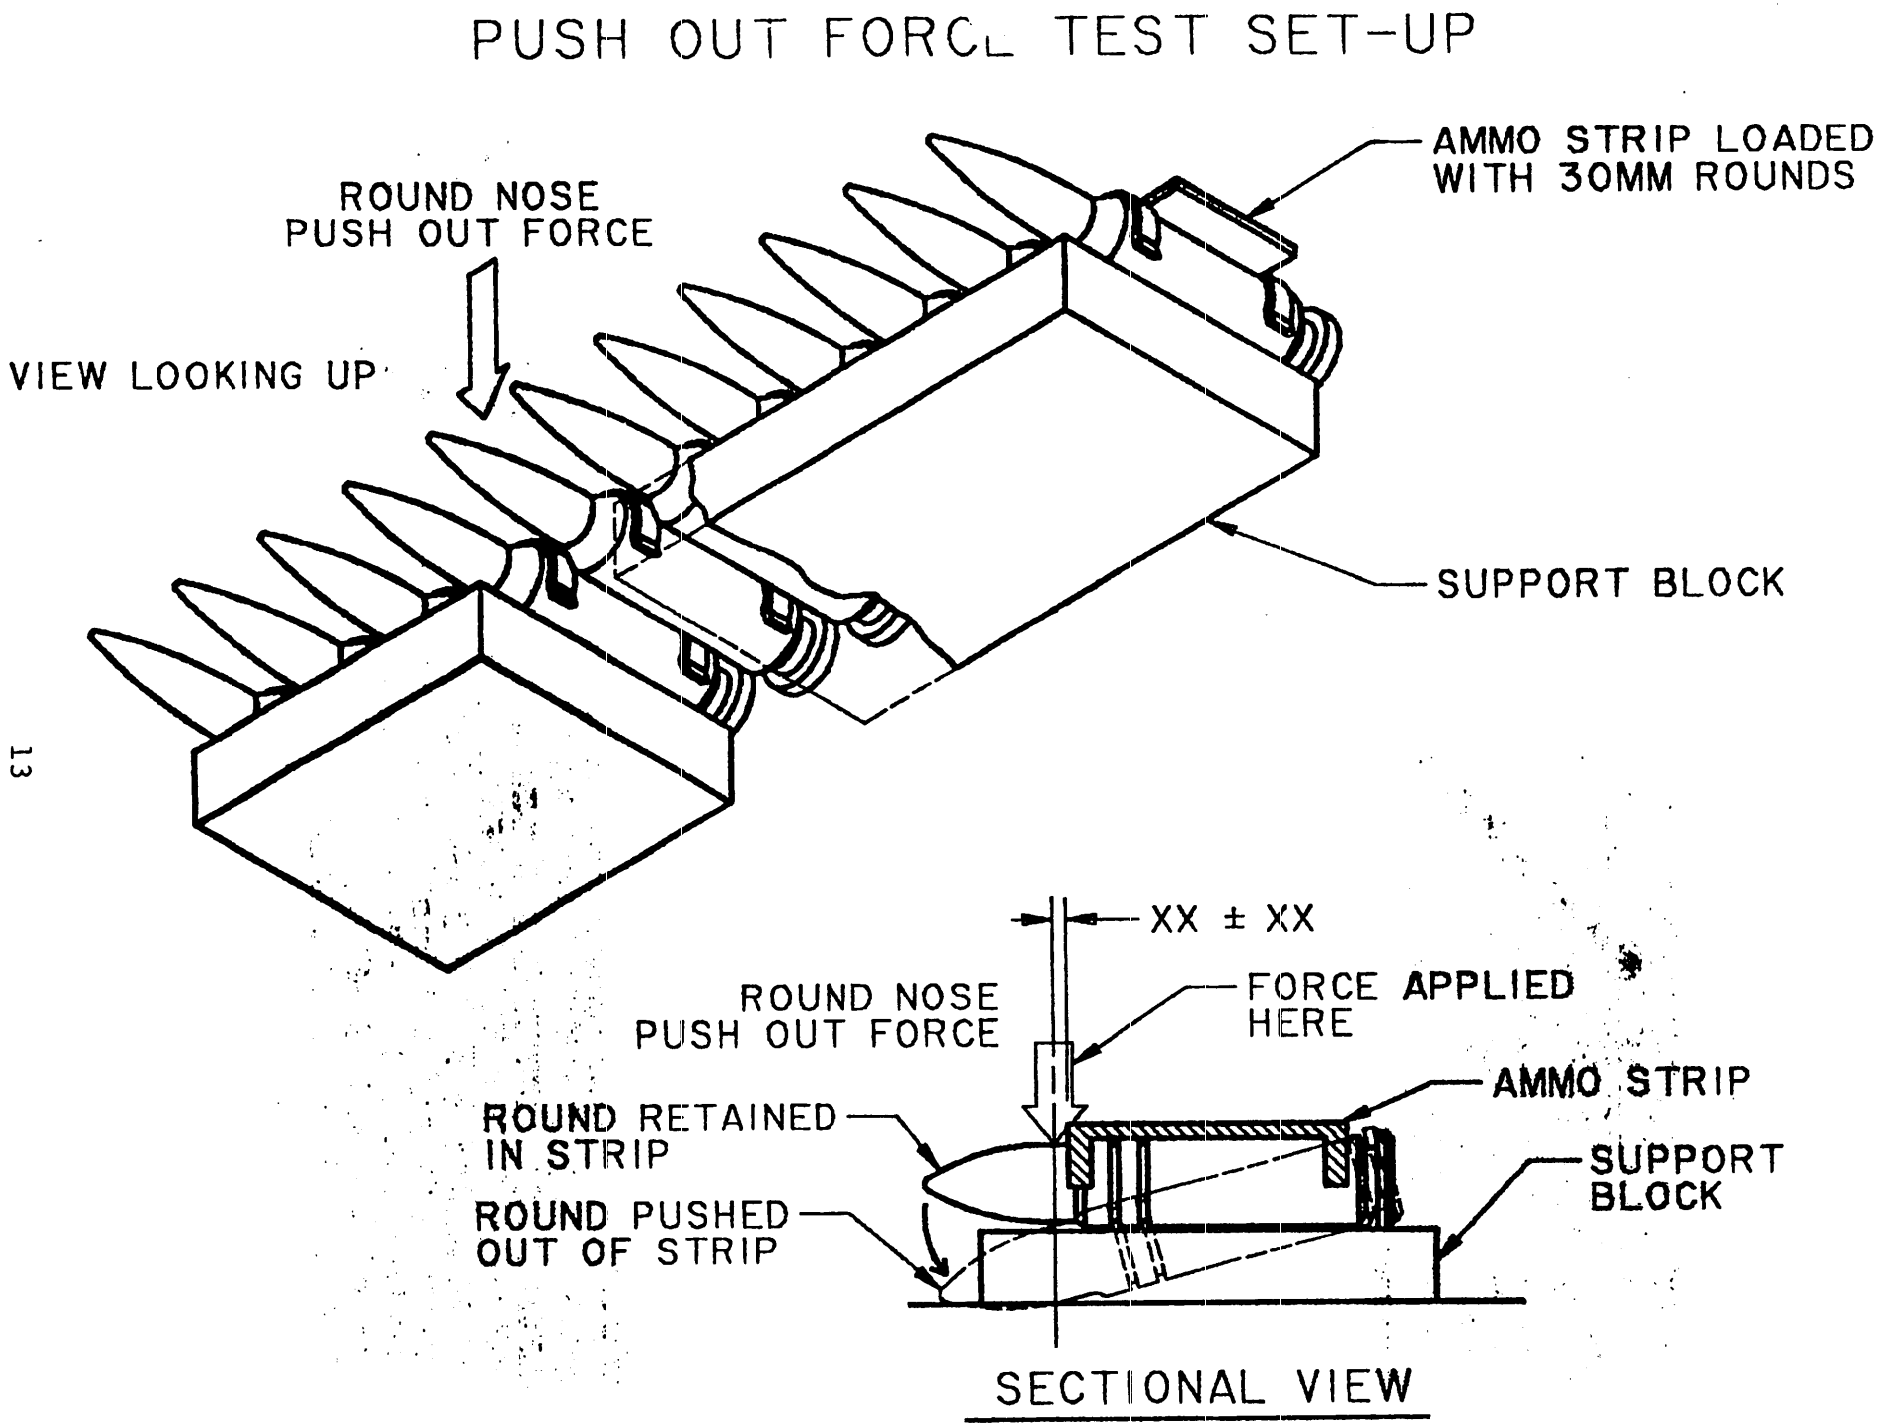


Source: https://assist.dla.mil -- Downloaded: 202610-23T03:57Z
Check the source to verify that this is the current version before use.

Fig 2. ROUND NOSE "PUSH OUT FORCE" TEST SET-UP

6. NOTES

6.1 Intended use. The ammunition strips are intended for use with the AH64 Uploader/Downloader for 30mm ammunition.

6.2 Acquisition requirements. Procurement documents shall specify the following;

6.2.1 Procurement requirements.

a. Title, number and and date of the item detail specifications.

b. Quantity required and delivery schedules.

c. Serialization requirements if applicable.

d. Quality Conformance Inspection, if other than specified in Section 4 of item detail specification.

e. First Article Sample requirements, if other than specified in Section 4 of item detail specification.

f. Packaging requirements, if other than specified in Section 5 of item detail specification.

g. Certificate of conformance for each lot or shipment of product.

h. Requirements for first article function testing.

6.2.2 Contract data requirements.

Contract data requirements for inspection equipment designs (conforming to Data Item Description DI-E-1118 or DI-R-1714 with appropriate addendum to each). See 6.4.

b. Data Cards - When required by incorporation of DD Form 1423 into the contract, data cards shall be prepared for each lot in accordance with Data Item Description DI-MISC-80043. Acceptance and Description Sheets will be prepared in accordance with MIL-STD-1171.

6.3 Inspection equipment designs. Inspection equipment designs are of two types - Government Special Inspection Equipment (SIE) designs and Contractor designs. SIE designs are designated by having numbers under the ‘Method of Inspection” heading in Section 4. Design responsibility for all other inspection equipment is assigned to the contractor. However, contractor need not furnish any design when a complete Government SIE design



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

is used. Unless otherwise specified, the contractor may use alternate or modified contractor designs of SIE when submitted in accordance with 603.2 and 663.3 should he elect to do so.

6.3.1 SIE designs. SIE designs may consist of any of the following:

a. Detailed drawings which completely depict all information necessary for the fabrication and use of the items on inspection equipment.

b. A source control drawing or specification control as defined in DOD-STD-100.

c. An envelope drawing as defined in DOD-STD-100, which establishes the criteria which a detailed design shall meet. When envelope drawings are specified, the contractor shall prepare detailed designs which comply with criteria herein.

6.3.2 Contractor designs. Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by general public.) Contractor designs shall include appropriate operating instruction calibration procedures and maintenance procedures- Commercial equipment shall be fully described by catalog listing or together with means which provide sufficient information to permit identification and evaluation by the government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment or with SIE designs if not covered (6.3.1.c). Designs shall be of the categorry and form (Per DOD-D-1000) specified in the contract Data Requirements List (DD Form 1423). This specification number and the category number from section 4 shall be referenced on each contractor design together with the component of assembly drawing number, revision letter and date to which the specific design applies.

6.3.3 Submission of acceptance inspection equipment designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulation, time frame and distribution specified in the Contract Data Requirements Lists (DD Form 1423). Partial submission of inspection equipment designs is permissible and encouraged However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract.Contractors designs shall be sent to AMSMC-QAF-I (D). The address will be specified on the Contract Data Requirements List, DD Form 1423 in



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

the contract. Unless otherwise specified, data itme DI-R-1714 will apply. When the contractor submits inspection equipment designs thru the government for approval he shall give the following:

a. The contract number.

b. The contract item (name, model, number, etc.)

c.The designs remaining to be submitted and expected date of submittal.

6.4 Definitions.

6.4.1 Contractor. Unless otherwise specified, the word Contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors sub-contractors, Government Owned, Contractor Operated (GOCO) and Government Owned, Government Operated (GOGO) plants.

6.4.2 Technical data package (TDP). A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance It consists of all applicable technical data such as plans, drawings, and associated lists specifications? standards, models, performance requirements, quality assurance provisions, and packaging data.

6.4.3 Deformed strip. A strip whose shape or dimensions or both have been mutilated or altered by processing to the extent that it is unsuitable for its intended use.

6.4.4 Cracks-tears. See Figures 3, 4 and 5.

6.4.4.1 Cracks-tears in principal areas. Any visible fracture of the strip extending through the stock thickness in depth, or a distance in length equal to or greater than the stock thickness. See figure 5 and Note.

6.4.4.2 Cracks-tears in non-principal areas. Any visible fracture of the strip extending through the stock thickness in depth and equal to or greater than the stock thickness in length; or any visible fracture less than stock thickness in depth and greater than two times stock thickness in length.

6.4.5 Burr. Any rough edge on any part of the strip which, in the opinion of the Government representative, would produce a definite removal of metal from a cartridge case or which would injure personnel in handling.




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

6.4.6 Process deviation. A process deviation is defined as a change in the approved basic method of manufacture or an operational change which may alter the metallurgical or physical properties of the item.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

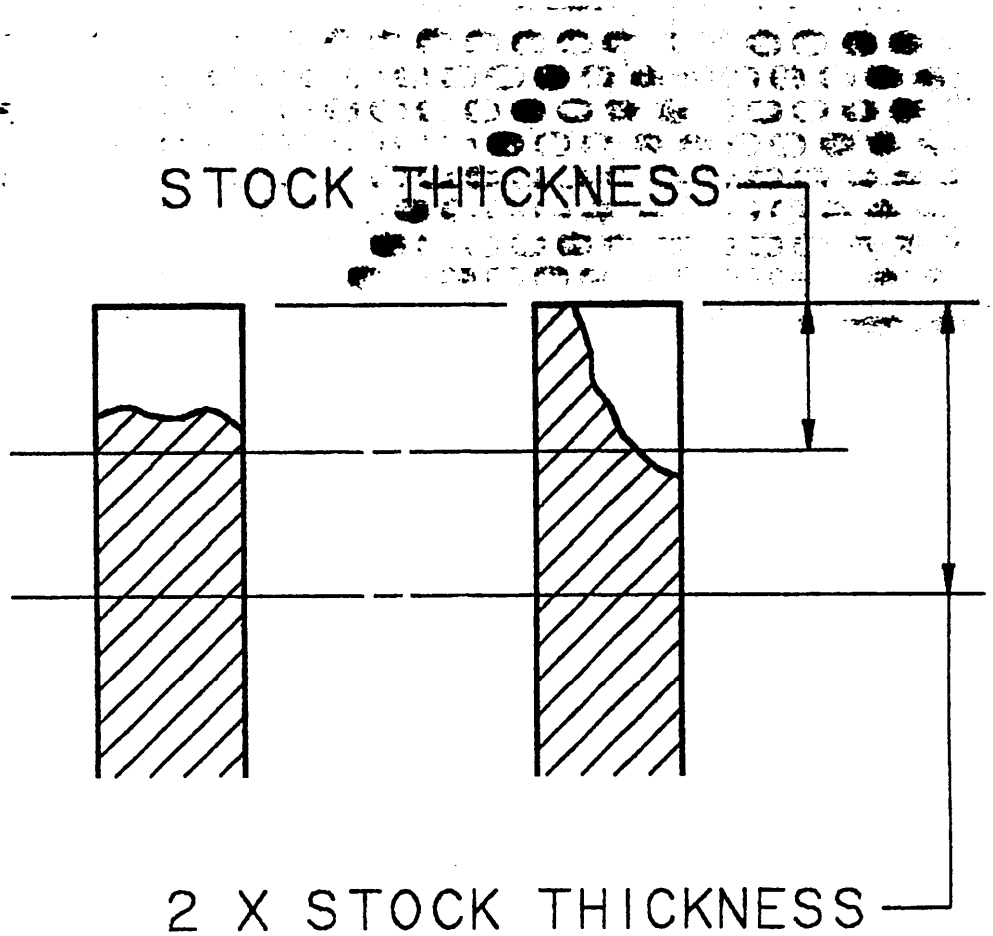



CRACKS - TEARS IN PRINCIPAL AREAS

FIGURE 3



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

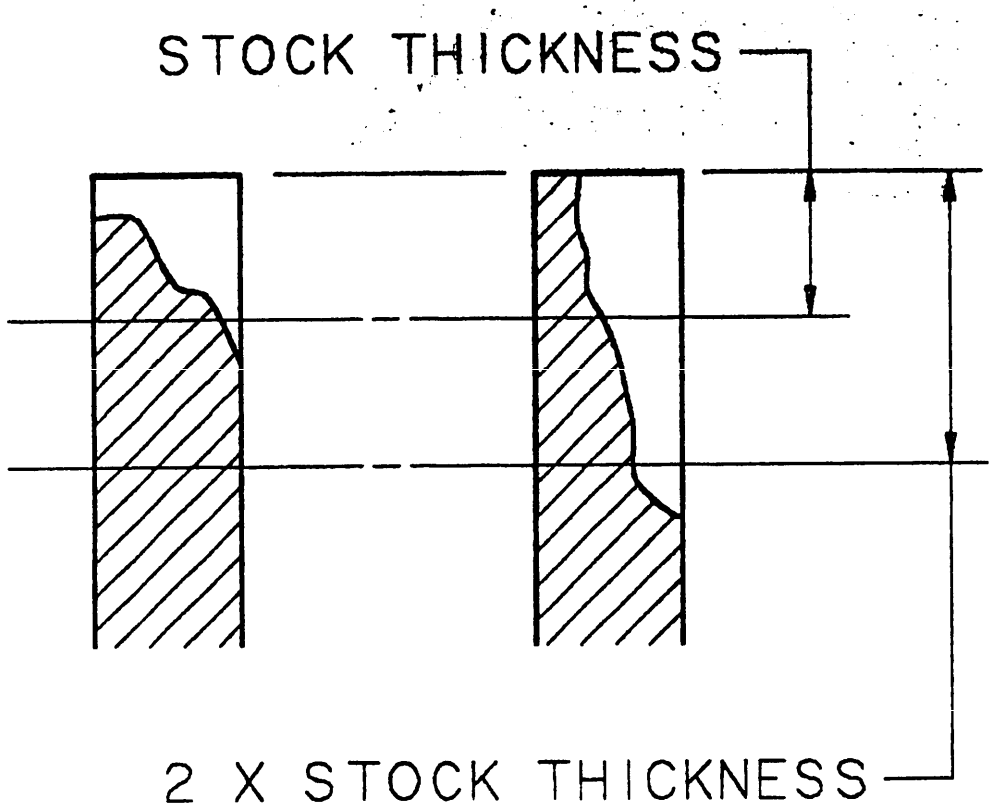



CRACKS - TEARS IN NON-PRINCIPAL AREAS

FIGURE 4




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

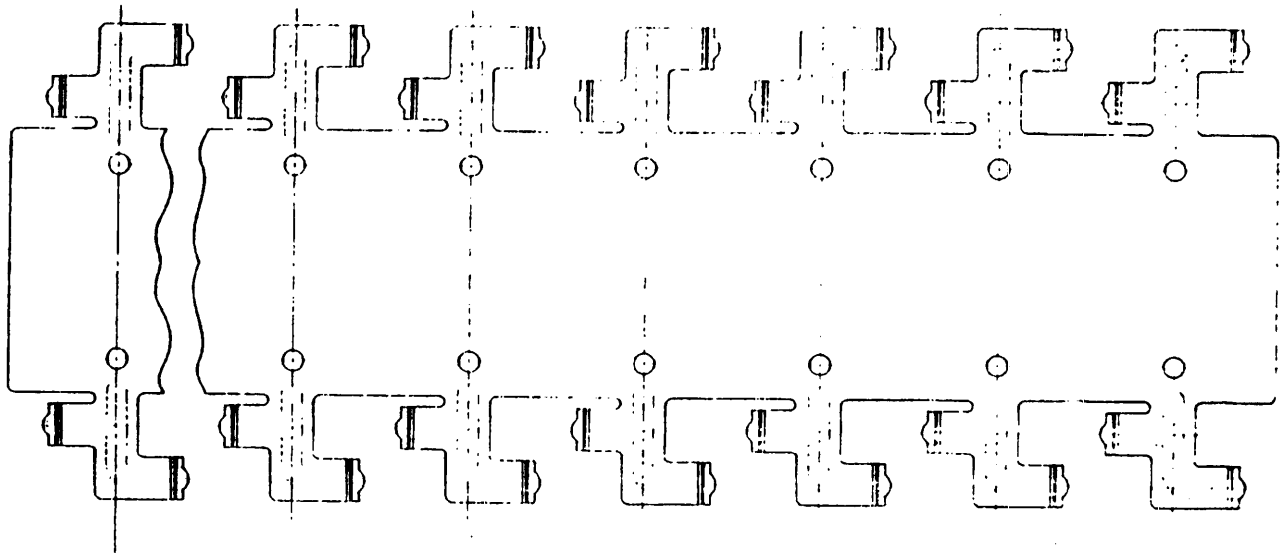

TOP VIEW OF ENTIRE STRIP



VIEW OF STRIP FROM RIGHT (OR LEFT) SIDE

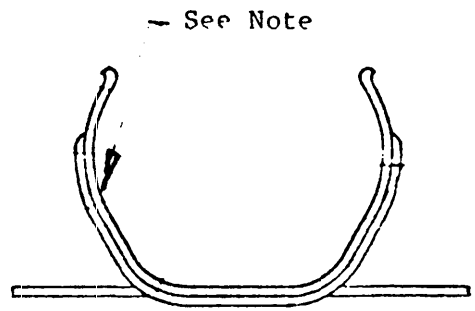


FRONT VIEW OF ONE CLIP

NOTE: Entire area inside clip is designated as a principal area.

FIGURE 5: DENOTATION OF PRINCIPLE AREAS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal, US Army Armament Research and Development Command (ARRADCOM) or US Army Armament Research and Development Center (ARDC) drawings. Technical data originally prepared by these activities are now under the cognizance of ARDEC.

6.6 Subject term (key word) listing,

30mm Metallic Ammuniion Strip
30mm Ammunition
30mm Automatic Weapon System

Custodian
Army-AR

Preparing activity:
Army-AR

(Project 1305-AD01)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-S-70745 (AR) | STRIP, AMMUNITION, METALLIC, 30MM |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: _____ |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

*(TO DETACH THIS FO CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:57Z
Check the source to verify that this is the current version before use.