
MILITARY SPECIFICATION SHEET

FITTINGS, TUBE, FLUID SYSTEMS, SEPARABLE, HIGH PRESSURE, DYNAMIC BEAM SEAL, DESIGN STANDARD FOR MALE END

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

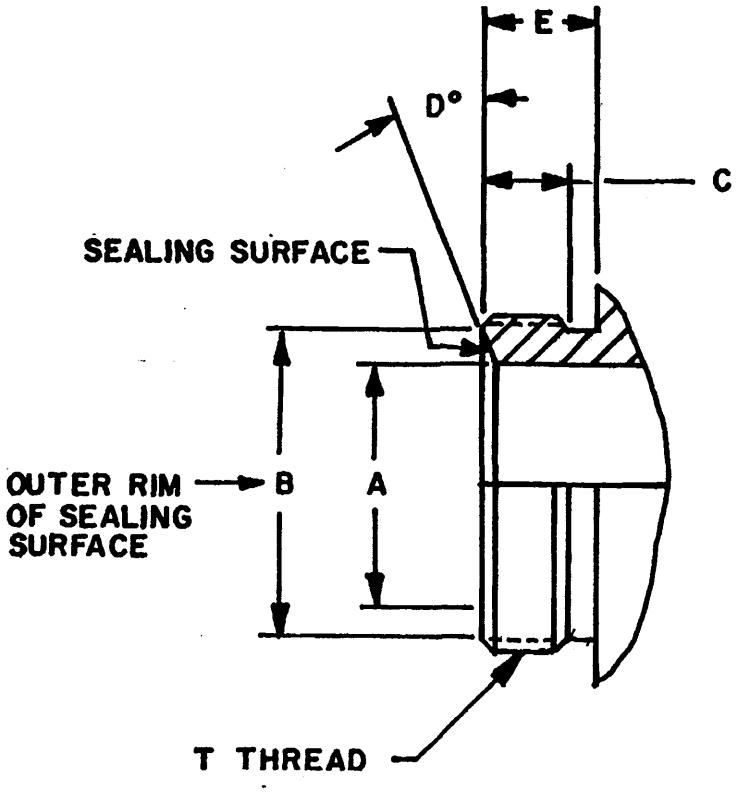

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER. DO NOT USE FOR PROCUREMENT OF PARTS.

NOTE: SEALING SURFACE SHALL BE 45Ra MAXIMUM. SEALING SURFACE AND THREADS SHALL BE COATED WITH SOLID FILM LUBRICANT PER MIL-L-8937.

FSC 4730

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED.

THIS DOCUMENT CONTAINS 2 PAGES

Source: https://assist.dla.mil -- Downloaded: 202610-23T11:26Z
Check the source to verify that this is the current version before use.

Size	Tubing O. D.	A	B	+0.030 -0.000 C	+0° 30' -0° D°	T THREAD MIL-S-8879	+0.030 -0.000 E
03	0.188	.164 .154	.329 .323	.164	3°	.3750-28 UNJS - 3A	.218
04	0.250	.194 .184	.383 .377	.197		.4375-24 UNJS - 3A	.260
05	0.313	.242 .232	.446 .440	.197		.5000-24 UNJS - 3A	.260
06	0.375	.307 .297	.497 .490	.205		.5625-20 UNJS - 3A	.280
07	0.438	.370 .360	.591 .583	.218		.6562-20 UNJS - 3A	.293
08	0.500	.408 .398	.654 .646	.218	8°30'	.7188-20 UNJS - 3A	.293
09	0.563	.460 .450	.709 .700	.274		.7812-18 UNJS - 3A	.357
10	0.625	.523 .512	.772 .763	.274		.8438-18 UNJS - 3A	.357
11	0.688	.602 .591	.857 .848	.303		.9375-16 UNJS - 3A	.397
12	0.750	.660 .649	.919 .910	.303		1.0000-16 UNJS - 3A	.397
14	0.875	.780 .769	1.044 1.034	.318		1.1250-16 UNJS - 3A	.415
16	1.000	.874 .862	1.158 1.148	.338		1.2500-14 UNJS - 3A	.445
20	1.250	1.128 1.115	1.486 1.476	.335		1.5781-14 UNJS - 3A	.442

Preparing activity:
Navy - AS
Project No. 4730-N702

Source: https://assist.dla.mil -- Downloaded: 202610-23T11:26Z
Check the source to verify that this is the current version before use.