MIL-S-48461B(AR)
30 June 1981
SUPERSEDING
MIL-S-48461A(AR)
1 March 1976

MILITARY SPECIF1CATION

SENSOR, CANT ANGLE: 11732800

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is l vailable far *use* by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Sensor, Cant Angle: 11732800 which is a unit of the M21 Ballistic Camputer, 11732979.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

BB-N-411	Nitrogen, Technical

MILITARY

MIL-F-13926	Fire Control Material; General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition .0of’
MIL-STD-45662	Calibration System Requirements

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

11732800	Sensor, Cant Angle
11732629	Amplifier, Operational

Inspection Equipment

11821748	Test Set - Immersion Leak, Purge and Fill
11822614	Test Station, Sensor Cant Angle
11823470	Settling Time - Test Fixture
11823471	Fixture - Vibration/Shock
11823472	Fixture - Altitude, Test Station

Packaging Data Sheet

P11732800	Packaging of Sensor Cant Angle: 11732800

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication. The cant angle sensor, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11732800 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Function. The assembly shall provide two 400 Hz voltage outputs which are functions of the assembly displacement in the roll axis. See figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

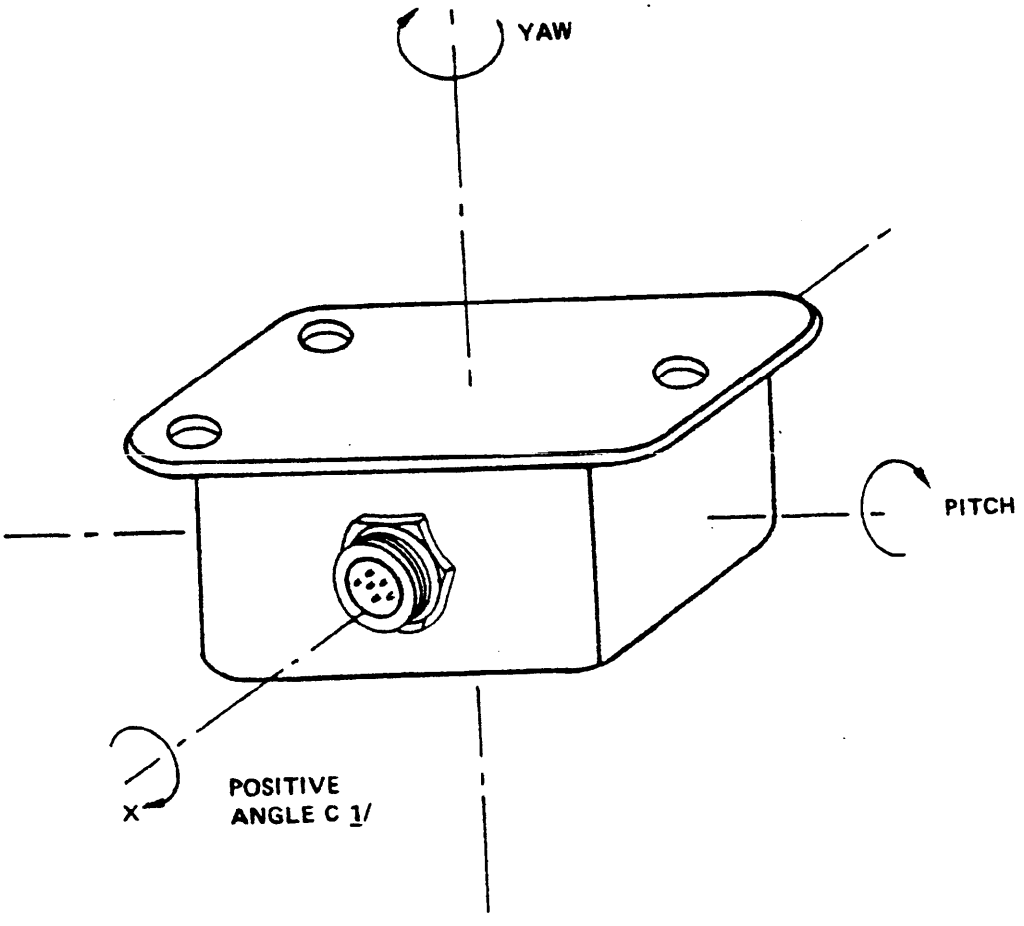


FIGURE 1. Cant assembly orientation.

1/ Roll and pitch angles are measured with respect to horizontal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finished
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a. Temperature	730 + 18°F
b. Relative humdity	50 percent + 30 percent
c. Atmospheric pressure	28.5 + 2.0 -3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first. article inspection and approval. (See 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements under the standard ambient conditions of 3.1.3. Unless otherwise specified, the assembly shall meet the requirements of 3.3.1 through 3.3.5 when connected in accordance with figure 2. Unless otherwise specified, all voltage measurements shall be the root mean square (rms) value of the voltage component which is in phase or 180 degrees out of phase with reference phase E_3(in phase component) and, where specified, j transfer function terms shall be voltage component which is + 90 degrees out of phase with E_3(quadrature component).

3.3.1 Rotor output voltages. The nominal output voltages ^{E}AC and ^{E}BC measured with respect to terminal C (see figure 2) shall be described by the following transfer functions: (See 4.6.2.1)

a. $^{E}AC = E1 * \cos C + E_2 * \sin C$

b. $^{E}BC = E_2 * \cos C - E_1 * \sin C$

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

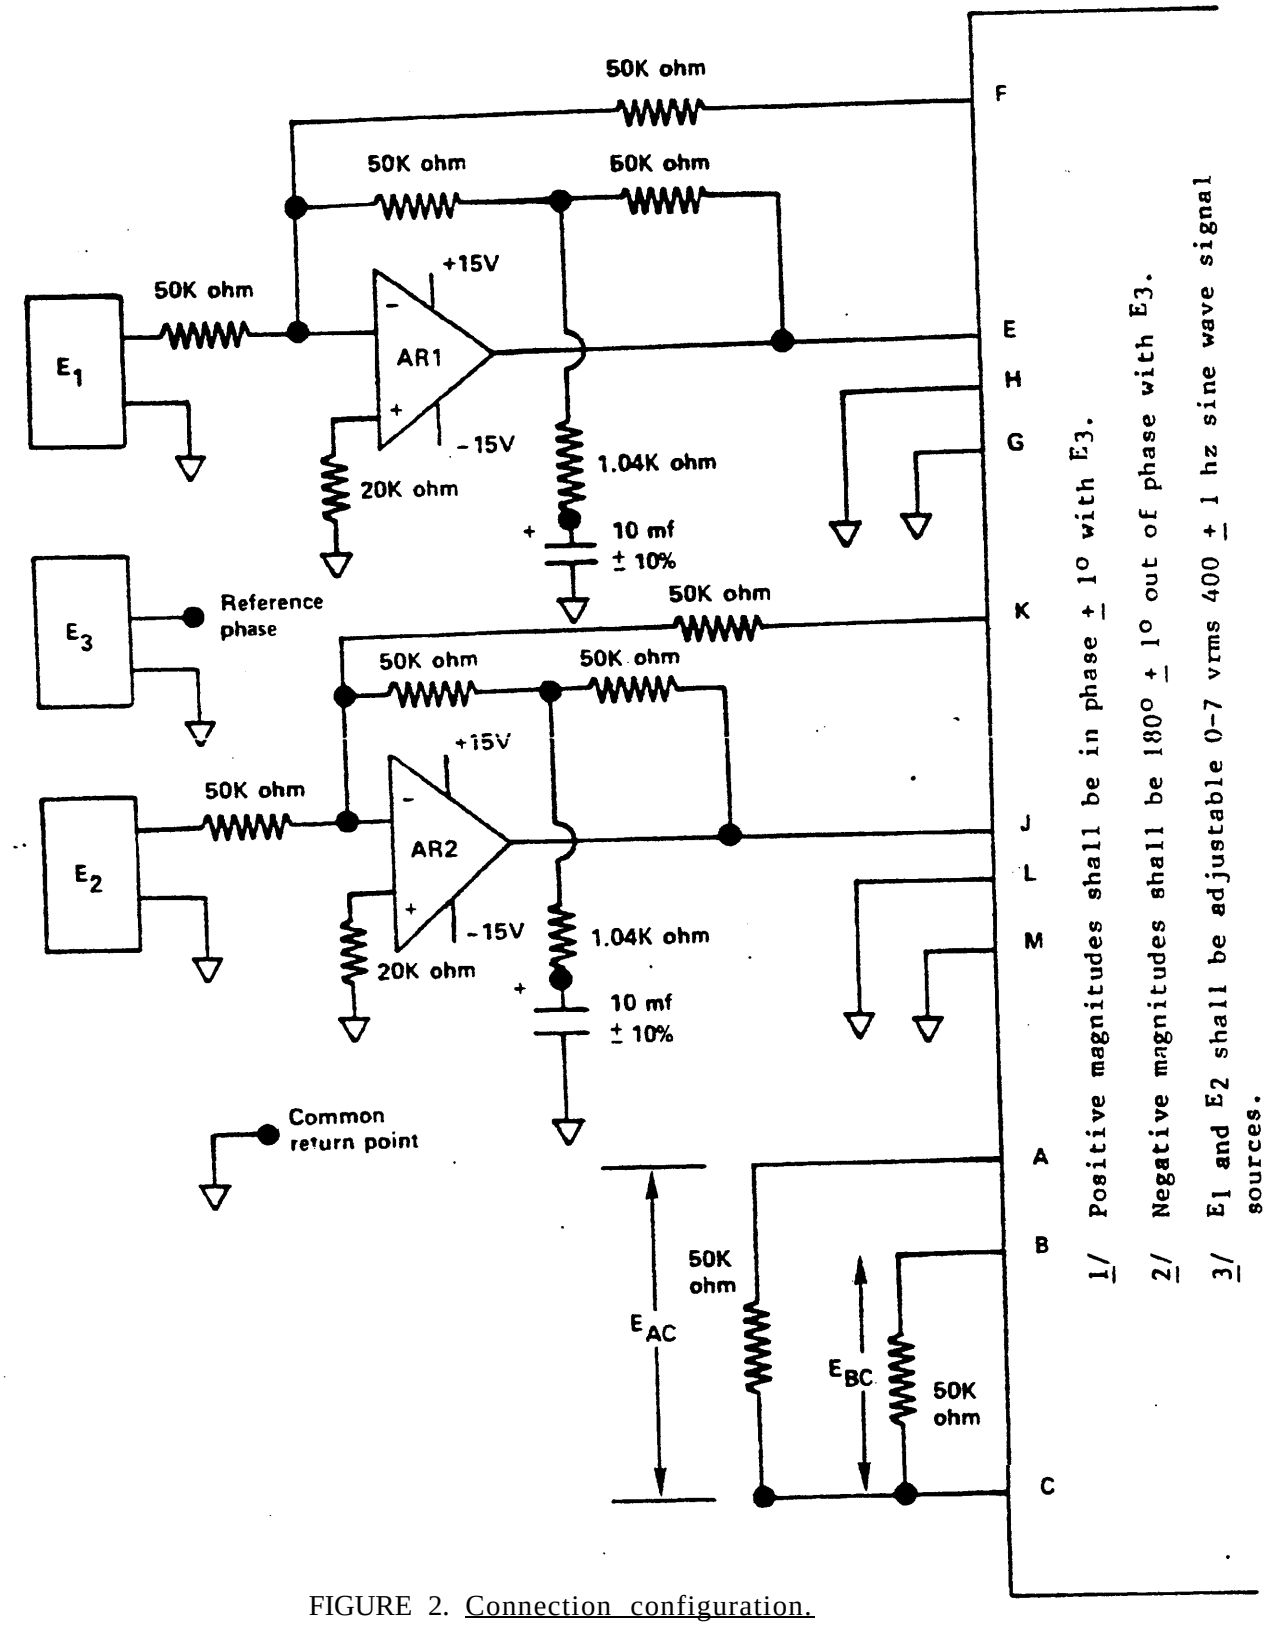


FIGURE 2. Connection configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

Where C is the assembly angular displacement about the roll axis in degrees (See figure 1) The tolerance of the outputs shall be not greater than the value of the following equations:

c. $\triangle E_{AC} = 0.0008 * |E_{AC}| + 0.00698 * |E_1 * \sin C| + 0.00582 * |E_2 * \cos C|$

d. $\triangle E_{BC} = 0.0008 * |E_{BC}| + 0.00582 * |E_1 * \cos C| + 0.00698 * |E_2 * \sin C|$

Application of the transfer function and tolerance equations shall be valid within the following limits:

e. $|E_1| < 7$ vrms

f. $|E_2| < 7$ vrms

g. $-15^\circ < C < 15^\circ$ (See figure 1)

h. $-15^\circ <$ Pitch angle $< 15^\circ$ (See figure 1)

3.3.2 Stator output voltages. The nominal output voltages E_{EH} and E_{JM} measured with respect to common shall be described by the following transfer functions: (See 4.6.2.2)

a. $E_{EH} = -1.026 * E1$

b. $E_{JM} = -1.026 * E2$

The tolerance of the outputs shall be not greater than value of the following equations:

c. $\angle E_{EH} = (0.025 \pm j\, 0.200) * E_1$

d. $\angle E_{JM} = (0.025 \pm j\, 0.200) * E_2$

Application of the transfer function and tolerance equations shall be valid within the following limits:

e. $|E_1| < 7$ vrms

f. $|E_2| < 7$ vrms

g. $-10^\circ < C < 10^\circ$

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.3.3 Rotor voltages at null. The maximum rms value for all voltage components shall be as specified for each item of table I after the assembly has been rotated about the roll axis to the position which reduces the in-phase component of the measured output voltage to a minimum value. (See 4.6.2.3)

TABLE I. Maximum null voltages.

Item	E_1 (vrms)	E_2 (vrms)	E_{AC} max.	E_{BC} max.
1	0.0 ± 0.5	5.0 ± 0.5	0.015	Do not measure
2	5.0 ± 0.5	0.0 ± 0.5	Do not measure	0.015

3.3.4 Spurius signal components. There shall be no periodic signal components of ^{E}AC, ^{E}BC, ^{E}EH, and ^{E}JM with the exception of the 400 Hz signal voltage and harmonics of the 400 Hz signal voltage. (See 4.6.2.4)

3.3.5 Settling time. The assembly output voltages shall attain steady state within one second of a 15 degree displacement of the roll axis. The displacement rate shall be not less than 150 degrees per second. (See 4.6.2.5)

3.4 Sealing. With an internal nitrogen pressure of 5.0 + 0.1 pounds per square inch gauge (psig), the assembly shall exhibit a pressure drop not greater than 0.2 psig for not less than 2 hours. The pressurized assembly shall be purged with dry nitrogen in accordance with BB-N-411, type I, grade B, class 1 with a dewpoint of -25°F or lower and shall have a final pressure of 0.0 + 0.2, -0.0 psig. (See 4.6.4)

3.5 Environmental.

3.5.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 + 4 gravity unit (g) for a duration of 18 + 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 + 10.0 g for a duration fo 1.5 + 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.5.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 3. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.5.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +125°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.5.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to 160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.5.5 Humidity. The assembly shall operate as specified herein at up to 100 percent relative humdity. (See 4.6.3.6)

3.5.6 Altitude. The assembly shall operate as specified herein under the following conditions:

a. during exposure to an atmospheric pressure equivalent to 10000 feet above sea level..

b. after exposure to an atmospheric pressure equivalent to 40000 feet above sea level for not less than 1 hour. (See 4.6.3.7)

3.5.7 Dust. The assembly shall operate as specified herein after exposure to moving dust for not less than 12 hours at velocities up to 1750 feet per minute. (See 4.6.3.8)

3.5.8 Salt fog. The assembly shall operate as specified herein after exposure to a 5 percent sodium chloride atomized spray for not less than 48 hours. (See 4.6.3.9)

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibilitity for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure that supplies and services confom to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.


4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (See 4.4).
2. Quality conformance inspection (See 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

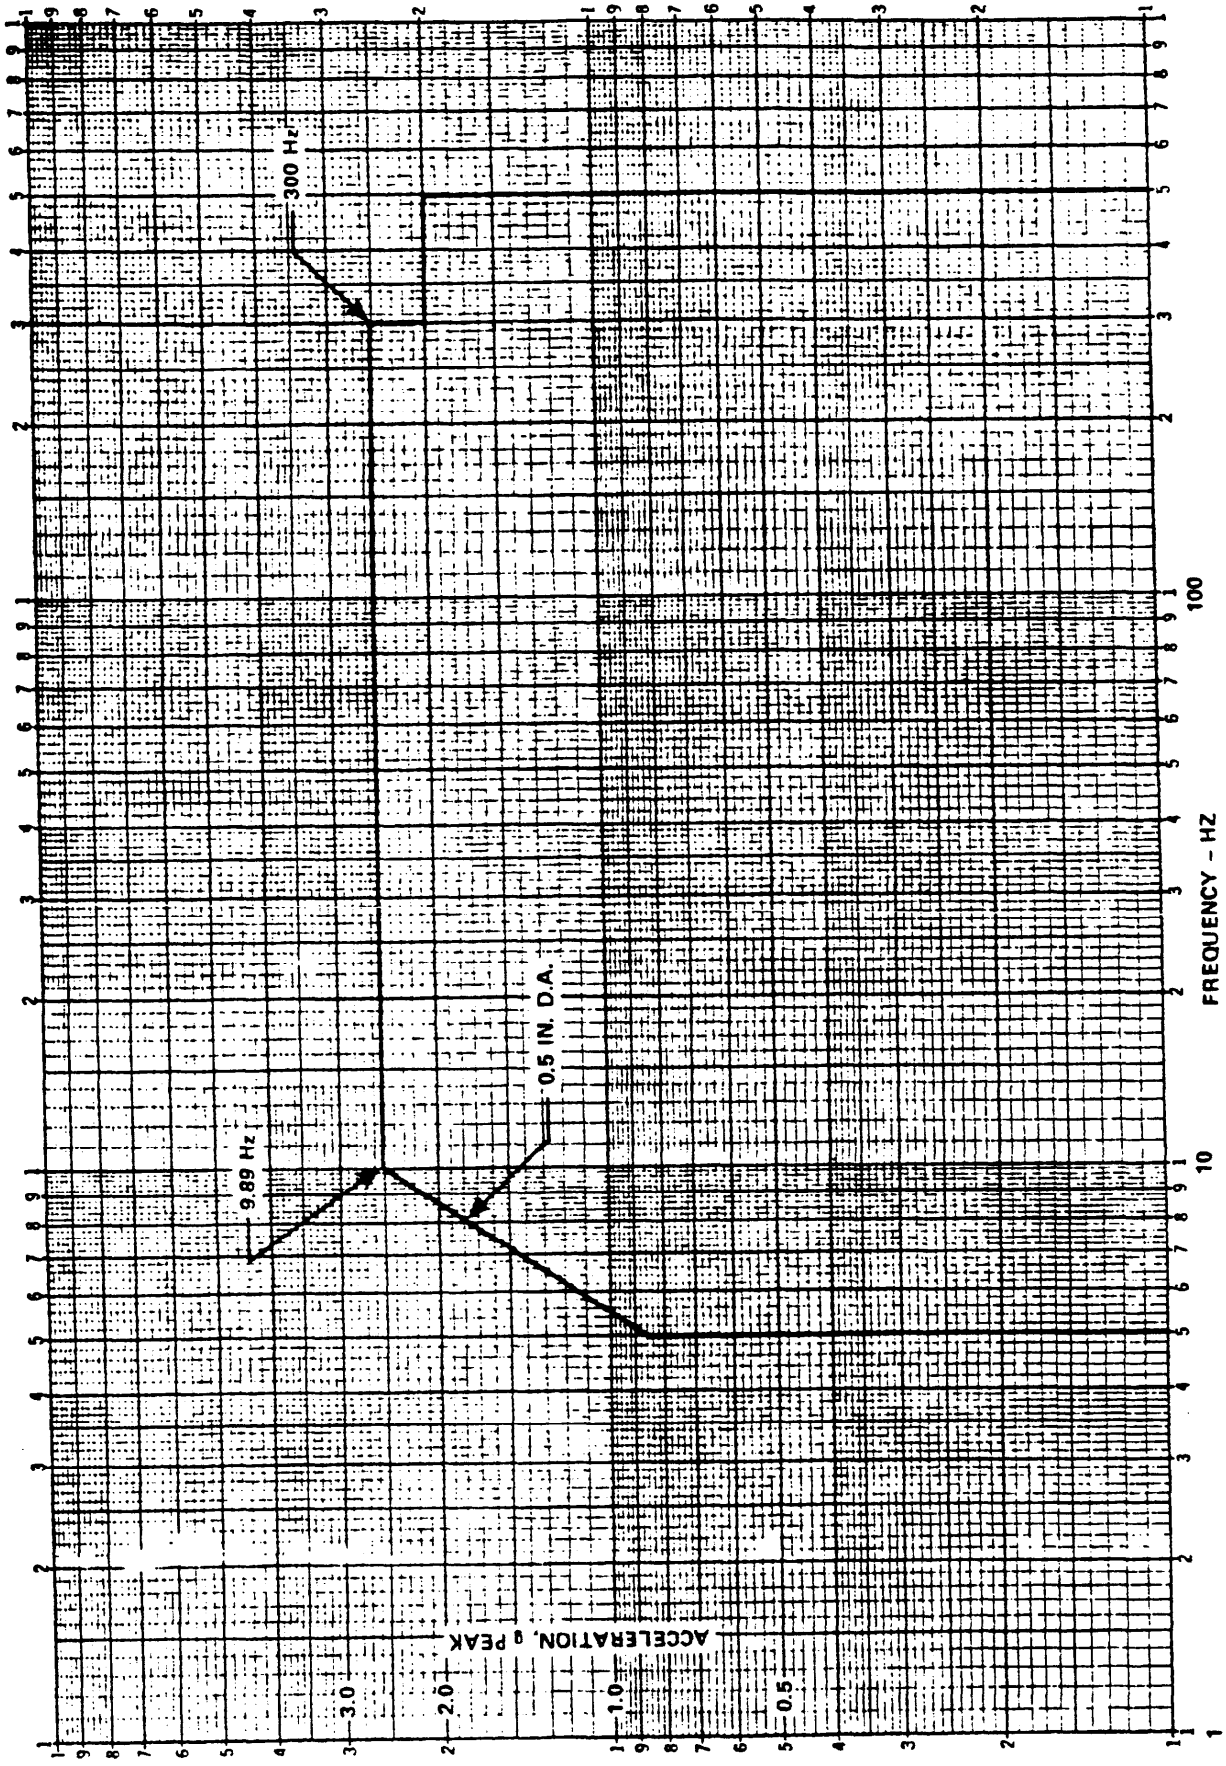

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

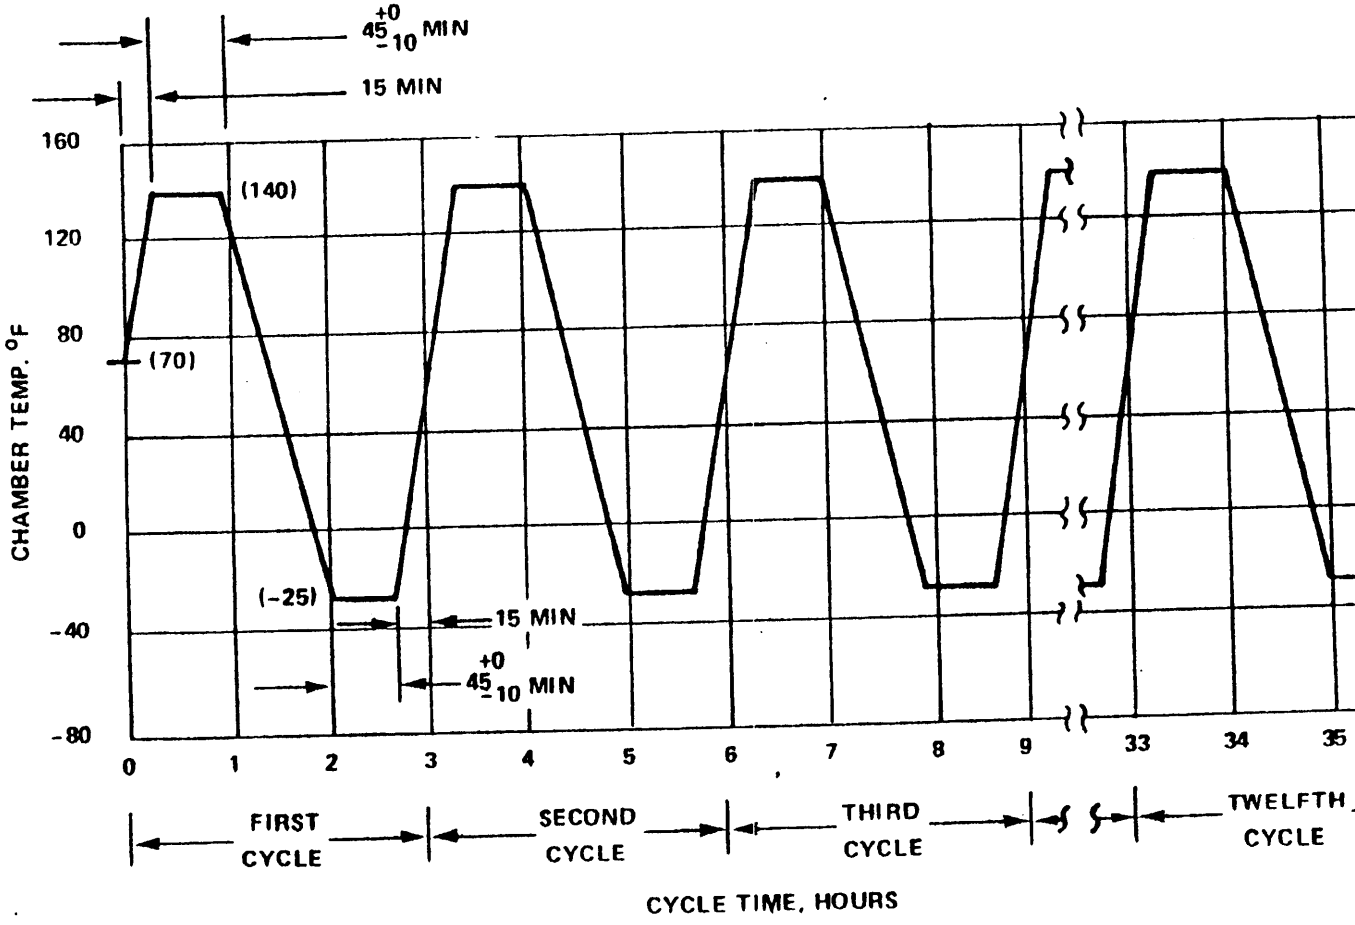


FIGURE 4. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in table II.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and ,shall be subjected to all the tests in table IV.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each months production, whichever occurs first. All the tests in table V shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

TABLE II. First article tests.

Item	Characteristic	Requirement	Test Procedure
1	Fabrication	3.1	Applicable drawings - Visual
2	General specification	3.1.2	MIL-F-13926 - Visual
3	Temperature cycling	3.5.3 and 3.5.4	4.6.3.5
4	Rotor output voltages	3.3.1	4.6.2.1
5	Stator output voltages	3.3.2	4.6.2.2
6	Rotor voltages at null	3.3.3	4.6.2.3
7	Spurious signal components	3.3.4	4.6.2.4
8	Settling time	3.3.5	4.6.2.5
9	Sealing A and B	3.4	4.6.4
10	Shock	3.5.1	4.6.3.1
11	Vibration A	3.5.2	4.6.3.2
12	High temperature	3.5.3 and 3.5.4	4.6.3.3
13	Low temperature	3.5.3 and 3.5.4	4.6.3.4
14	Humidity	3.5.5	4.6.3.6
15	Altitude	3.5.6	4.6.3.7
16	Dust	3.5.7	4.6.3.8
17	Salt fog	3.5.8	4.6.3.9

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table IV and only the test of item 307 in table V shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table III and shall be examined visually for completeness, improper assembly and evidence of poor workmnship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4,5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet

TABLE III. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Rotor output voltages	3.3.1	4.6.2.1
102	Stator output voltages	3.3.2	4.6.2.2
103	Rotor voltages at null	3.3.3	4.6.2.3
104	Spurious signal components	3.3.4	4.6.2.4
105	Settling time	3.3.5	4.6.2.5
106	Sealing A	3.4	4.6.4

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

TABLE IV. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General Specification	3.1.2	MIL-F-13926 - Visual

TABLE V. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.5.1	4.6.3.1
304	Vibration B	3.5.2	4.6.3.2
305	High Temperature	3.5.3 and 3.5.4	4.6.3.3
306	Low Temperature	3.5.3 and 3.5.4	4.6.3.4
307	Temperature cycling	3.5.3 and 3.5.4	4.6.3.5
308	Sealing B	3.4	4.6.4

4.6 Methods of inspection.

4.6.1 Test equipment. The test equipment in table VI shall be used where specified to perform the required test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

TABLE VI. Test equipment.

Item	Part Number	Nomenclature
1	11821748	Test Set - Immersion Leak, Purge and Fill
2	11822614	Test Station, Sensor - Cant Angle
3	11823470	Settling Time - Test Fixture
4	11823471	Fixture - Vibration/Shock
5	11823472	Fixture - Altitude, Test Station

4.6.2 Performance tests.

4.6.2.1 Rotor output voltages. Use items 2 and 3 of table VI to verify compliance with the requirements of 3.3.1.

4.6.2.2 Stator output voltages. Use items 2 and 3 of table VI to verify compliance with the requirements of 3.3.2.

4.6.2.3 Rotor voltages at null. Use items 2 and 3 of table VI to verify compliance with the requirements of 3.3.3.

4.6.2.4 Spurious signal components. Use items 2 and 3 of table VI to verify compliance with the requirements of 3.3.4.

4.6.2.5 Settling time. Use items 2 and 3 of table VI to verify compliance with the requirements of 3.3.5.

4.6.3 Environmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use item 4 of table VI and subject the assembly to the shock test specified in MIL-STD-810, method 516.2, procedure I, figure 515.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ± 4 g with a time duration of 18 + 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.6.3.1.2 High intensity. Use item 4 of table VI and subject the assembly to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 100.0 ± 10.0 g with a time duration of 1.5 + 0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.2 Vibration. Application of Vibration A and Vibration B shall be as determined by the procurement conditions of 4.5.1 and the first article conditions of 4.4.

4.6.3.2.1 Vibration A. Use item 4 of table VI and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 3 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Subject the assembly to the high temperature test specified. in MIL-STD-810, method 501.1, procedure I. “The highest operating temperature shall be 140°F. The performance tests of 4.6.2 shall be applied.

4.6.3.4 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of 4.6.2 shall be applied.

4.6.3.5 Temperature cycling. With power and loads of figure 2 applied, subject the assembly to the temperature profile specified in figure 4. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.6 Humidity. Place the assembly in a humidity chamber and subject it to the humidity test specified in MIL-STD-810, method 507.1, procedure IV. During steps 4, 6 and 8 of procedure IV, subject the assembly to the performance tests of 4.6.2. After exposure, subject the assembly to the performance tests of 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

4.6.3.7 Altitude. Use item 5 of table VI, place the assembly in an altitude chamber and subject it to the altitude test specified in MIL-STD-810, method 500.1, procedure I, except that:

a. First, the assembly in a non-operating condition, shall be exposed to an atmospheric pressure equivalent to 40000 feet above sea level for a period of not less than 1 hour.

b. Second, with the chamber presssure increased to an atmospheric equivalent to 10000 feet above sea level, subject the assembly to the performance tests of 4.6.2..

4.6.3.8 Dust. Subject the assembly to the dust test specified in MIL-STD-810, method 510.1, procedure I. At the conclusion of this test, subject the assembly to the performance test- of 4.6.2.

4.6.3.9 Salt fog. Subject the assembly to the corrosion test specified in MIL-STD-810, method 509.1, procedure I. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.4 Sealing. Pressurize the assembly with nitrogen to 5.0 + 0.1 psig and perform either Sealing A or Sealing B leakage test. After determination of compliance with the sealing requirement, purge the assembly with dry nitrogen at 1 psig for not less than 5 minutes and lower the pressure to 0.0 + 0.2 - 0.0 psig. Nitrogen shall be BB-N-411, type I, class 1, grade B with a dewpoint not greater than -25°F.

4.6.4.1 Test selection. Application of Sealing A and Sealing B shall be as determined by the procurement conditions of 4.5.1 and the first article conditions of 4.4.

4.6.4.2 Sealing A. Use item 1 of table VI and subject the assembly to the leakage (immersion) test specified in MIL-STD-810, method 512.1, procedure IV. The immersion period shall be not less than 5 minutes.

4.6.4.3 Sealing B. Use item 1 of table VI, place the assembly in the following environment for not less than 2 hours and verify that the pressure drop is not greater than 0.2 psig.

a. Temperature	73° + 2.5°F
b. Relative humidity	50 percent ± 5 percent
c. Atmospheric pressure	28.5 + 2.0 - 3.0 in. Hg.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing, and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P11732800. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. The assembly is a part of the M21 Ballistic Computer System.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Special tests and examination as required, the type of inspection required and the activity responsible for testing and its facility.

d. Serialization requirements, if applicable.

e. Requirements for first article sample, including data requirements for certificates of conformance for materials.

f. Applicable packaging data sheet number.

g. Selection of applicable levels of preservation, packaging and packing.

h. Applicable stock number.

6.3 Previous revisions of MIL-S-48461B was for the US Army Armament Research and Development Command's internal use only and were not forwarded, to the Naval Publications and Form Center for Publication.

Custodian:
Army-AR

Preparing Activity:
Army-AR
Project 1220-A288

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN:: DRDAR-QAF
DOVER, NJ 07801

OLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-48461B SENSOR, CANT ANGLE: 11732800

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.