1.2.1.1 Standard resistance values. The standard resistance values and the resistance value designators for the schematic "H" are as specified in table I.

TABLE I. Standard resistance values.

| Resistance designator | R1 (ohms) | R2 (ohms) | Resistance designator | R1 (ohms) | R2 (ohms) |
|---|---|---|---|---|---|
| A001 | 82 | 130 | A010 | 330 | 470 |
| A002 | 120 | 200 | A011 | 330 | 680 |
| A003 | 130 | 210 | A012 | 1.5 k | 3.3 k |
| A004 | 160 | 260 | A013 | 3.0 k | 6.2 k |
| A005 | 180 | 240 | A014 | 180 | 270 |
| A006 | 180 | 390 | A015 | 270 | 270 |
| A007 | 220 | 270 | A016 | 560 | 560 |
| A008 | 220 | 330 | A017 | 560 | 1.2 k |
| A009 | 330 | 390 | A018 | 620 | 2.7 k |

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-R-874 - Resistor Networks, Fixed, Film, Established Reliability, General Specification for.

MIL-R-39032 - Resistors, Packaging of.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specifications. The individual item requirements shall be in accordance with MIL-R-874, and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions as specified on figure 1.


3.2.1 Internal connection. Internal connections shall be accomplished by thermal compression bonding of gold to gold, to form a solid phase weld from the lead to the internal resistor connection. No solder connection eutetic or noneutetic shall be permitted in this construction.


3.3 Power rating. The power rating shall be as specified in table II, based on a full load operation at an ambient temperature of +70°C. For operation at temperatures higher than +70°C, derate in accordance with MIL-R-874.

3.4 Power conditioning. The power applied for power conditioning for schematics "C", "G", and "H" shall be 1.5 times rated power.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:44Z
Check the source to verify that this is the current version before use.

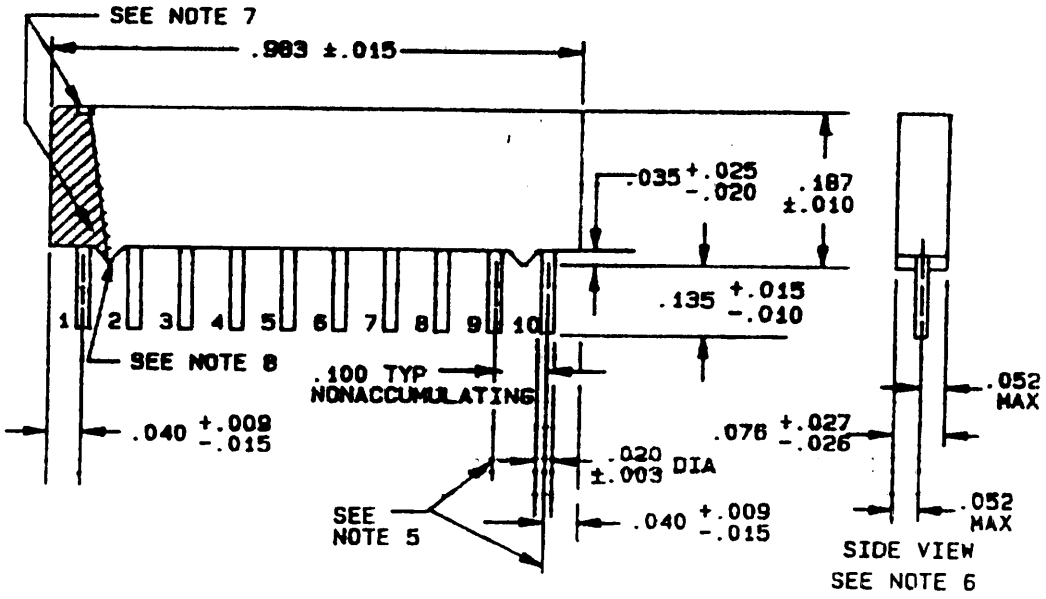

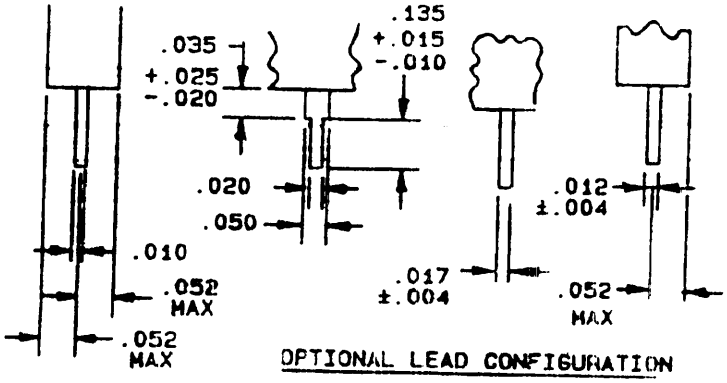
| Inches | mm | Inches | mm |
|---|---|---|---|
| .003 | 0.08 | .027 | 0.69 |
| .004 | 0.10 | .035 | 0.89 |
| .009 | 0.23 | .040 | 1.02 |
| .010 | 0.26 | .050 | 1.27 |
| .012 | 0.31 | .052 | 1.32 |
| .015 | 0.38 | .076 | 1.93 |
| .017 | 0.43 | .100 | 2.54 |
| .020 | 0.51 | .135 | 3.43 |
| .025 | 0.65 | .187 | 4.75 |
| .026 | 0.66 | .983 | 24.97 |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. The picturization of the styles above is given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.
5. Terminal centerline to centerline measurements made at a point of emergence of the lead from the body.
6. Measurement made at point of emergence of the lead from the body.
7. Pin 1 locator shall be a dot, notch, stripe, or numeral 1 adjacent to pin number 1 in the shaded area; also, additional marking may be placed on the top edge where the bevel may be located.
8. If the standoffs are located on the body, a minimum of two standoffs are required as illustrated. As an option, additional standoffs may be located on the body of the resistor network. If leads with standoffs are used, standoffs on the body are not required.

FIGURE 1. RZR91 style resistors.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:44Z
Check the source to verify that this is the current version before use.

3.5 Voltage rating. The maximum continuous working voltage for each style shall not exceed 45 volts dc or ac rms.

3.6 Resistance. Minimum and maximum resistance values shall be as specified in table III.

TABLE II. Power ratings.

| Schematic | Characteristic | Element power rating (watts) | Network power rating (watts) |
|---|---|---|---|
| A | H | 0.12 | 1.08 |
| | K | 0.12 | 1.08 |
| | M | 0.12 | 1.08 |
| B | H | 0.12 | 0.60 |
| | K | 0.12 | 0.60 |
| | M | 0.12 | 0.60 |
| J | H | 0.070 | 1.08 |
| | K | 0.070 | 1.08 |
| | M | 0.070 | 1.08 |

TABLE III. Resistance values.

| Resistance tolerance | Characteristic | Minimum resistance (ohms) | Maximum resistance (megohm) |
|---|---|---|---|
| F (±1.0 percent) | H, K, M | 10.0 | 1 |
| G (±2.0 percent) | K, M | 10.0 | 1 |
| J (±5.0 percent) | K, M | 10.0 | 1 |

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-874.

4.2 H schematic tests. For the tests on schematic H, the dc resistance measurements, resistance temperature characteristic measurement, and short time overload power application shall be made between each terminal and the applicable common terminal without compensation for the shunt circuits. The pin to pin dc resistance measurements shall be used directly to determine the acceptability to section 3 requirements.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39032.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-R-874 are applicable to this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:44Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

6.3 PIN. PIN is a new term encompassing previous terms used in specifications such as part number, type designator, identification number, etc. (see 1.2).

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1261-9)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:44Z
Check the source to verify that this is the current version before use.

standoffs are used, standoffs on the body are not resistor network. If leads with

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:44Z
Check the source to verify that this is the current version before use.