
METRIC

MILITARY SPECIFICATION SHEET

PIN, SPRING, TUBULAR, COILED, HEAVY DUTY, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pins described herein shall consist of this document and the latest issue of specification DOD-P-63477.

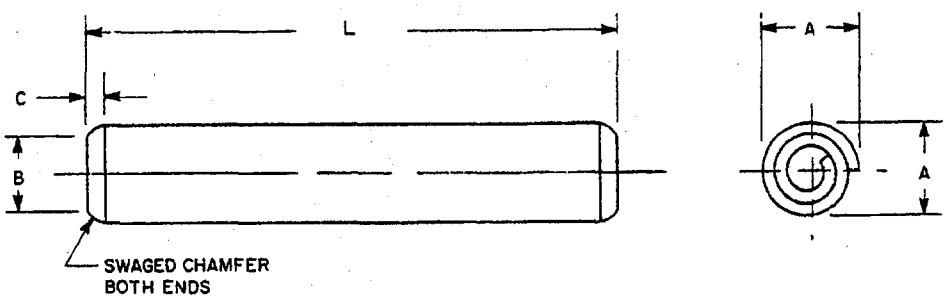

NOTE:

Unless otherwise specified, dimensions are in millimeters.

FIGURE 1. Pin, spring, tubular, coiled, heavy duty.

REQUIREMENTS

1. Material: Carbon steel, 1070 thru 1095.
2. Protective finish: Black oiled (code B); Cadmium plating (code C); Phosphate coating (code P).
3. Part number: Consists of the letter "D" the basic number of this specification sheet, the dash number taken from table I and a finish code identifier.

Example: D63477/8-139C

- finish code identifier
- dash number
- specification sheet number

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers.

Nominal size		1.5	2	2.5	3	4	5	6	8	10	12
A Diameter	max	1.71	2.21	2.73	3.25	4.30	5.35	6.40	8.55	10.65	12.75
	min	1.61	2.11	2.62	3.12	4.15	5.15	6.18	8.25	10.30	12.35
B Chamfer diameter	max	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80	9.75	11.70
C Chamfer length	ref	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0	2.5	3.0
Recommended hole size	max	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15	10.15	12.18
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00
Min double shear force (kN)		1.7	3.0	4.4	7.1	13.2	20.3	29.3	34.3	84.0	106.0

L - Length	Tol	Dash numbers									
4	+0.5 0	3	33								
6	+0.5 0	4	34	64	94						
8	+0.5 0	5	35	65	95	125					
10	+0.5 0	6	36	66	96	126	156				
12	+1.0 0	7	37	67	97	127	157	187			
14	+1.0 0	8	38	68	98	128	158	188			
16	+1.0 0	9	39	69	99	129	159	189	219		
18	+1.0 0	10	40	70	100	130	160	190	220		
20	+1.0 0	11	41	71	101	131	161	191	221	251	
22	+1.0 0	12	42	72	102	132	162	192	222	252	
24	+1.0 0	13	43	73	103	133	163	193	223	253	
26	+1.0 0	14	44	74	104	134	164	194	224	254	284
28	+1.0 0		45	75	105	135	165	195	225	255	285

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before us

TABLE I. Part numbers. - Continued

Nominal size		1.5	2	2.5	3	4	5	6	8	10	12
A Diameter	max	1.71	2.21	2.73	3.25	4.30	5.35	6.40	8.55	10.65	12.75
	min	1.61	2.11	2.62	3.12	4.15	5.15	6.18	8.25	10.30	12.35
B Chamfer diameter	max	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80	9.75	11.70
C Chamfer length	ref	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0	2.5	3.0
Recommended hole size	max	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15	10.15	12.18
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00
Min double shear force (kN)		1.7	3.0	4.4	7.1	13.2	20.3	29.3	34.3	84.0	106.0
L - Length	Tol	Dash numbers									
30	+1.0 0		46	76	106	136	166	196	226	256	286
32	+1.0 0		47	77	107	137	167	197	227	257	287
36	+1.0 0		48	78	108	138	168	198	228	258	288
40	+1.0 0		49	79	109	139	169	199	229	259	289
45	+1.0 0			80	110	140	170	200	230	260	290
50	+1.0 0				111	141	171	201	231	261	291
55	+1.5 0					142	172	202	232	262	292
60	+1.5 0					143	173	203	233	263	293
65	+1.5 0							204	234	264	294
70	+1.5 0							205	235	265	295
75	+1.5 0							206	236	266	296
80	+1.5 0									267	297

Custodians
Army - AR
Navy - OS
Air Force - 99

Review Activities
Army - ER, MI
DLA-IS
NSA-NS

User Activities
Army - AV, CE, ME
Navy - MC, YD

Preparing Activity
Army - AR

Agent
DLA-IS

(Project 5315-0346)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.