MILITARY SPECIFICATION SHEET

CONTACT ASSEMBLY, ELECTRICAL

This specification sheet is approved for use within Army Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the contact assembly described herein shall consist of this specification and the latest issue of MIL-C-55074(EL).

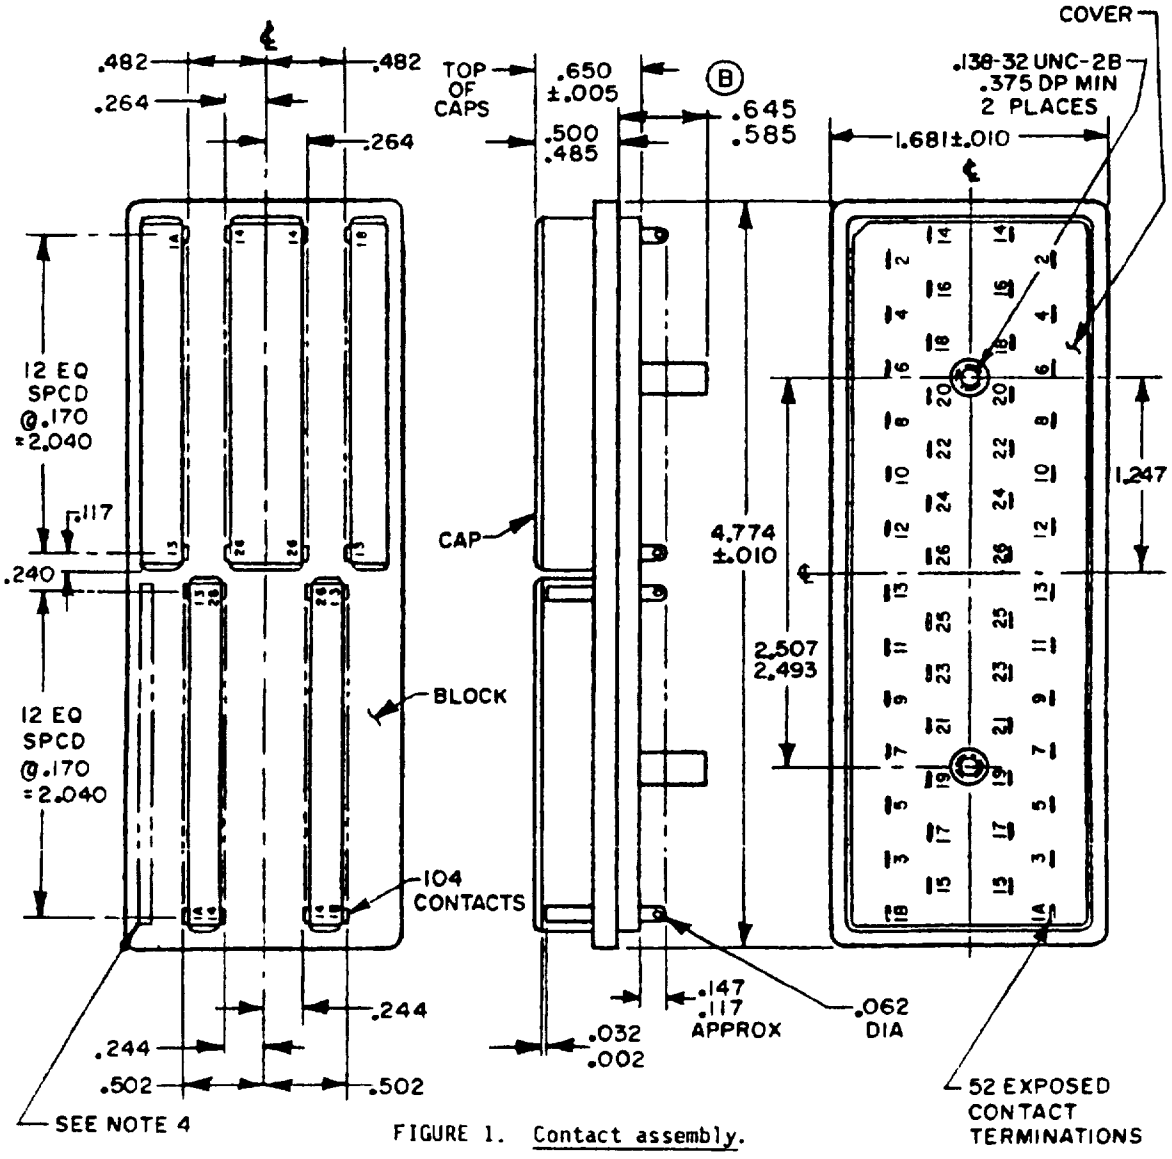


FIGURE 1. Contact assembly.

Ⓑ denotes change

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.002	0.05	.240	6.10	502	12.75
.005	0.13	.244	6.20	.585	14.86
.010	0.25	.264	6.71	.645	16.38
.032	0.81	.375	9.52	1.247	31.67
.062	1.57	.482	12.24	1 681	42.70
117	2 97	.485	12.32	2.040	51.82
.138	3.51	.500	12.70	2.493	63.32
.147	3.73			2.507	63 68
.170	4.32			4.774	121.26

NOTES:
1. Dimensions are in inches.
2 Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Marking to appear in area shown. Marking to consist of manufacturer's name or code identification, CONT. ASSY. ELEC., MX-3227/G (M 55074/4), molded in characters approximately 062 (1.57 mm) high
5 This contact assembly comes assembled in connectors M 55074/1 (U-185B/G), M 55074/2 (U-186C/G), and M 55074/3 (U-187A/G).
6. M 55074/4 represents MX-3227/G where applicable in MIL-C-55074
7 Contacts, studs, cover and caps to be fastened to block using epoxy resin or equivalent.
8. Contact assembly shall be manufactured in accordance with drawing number SC-DL-68558.
9 Contact assembly must conform to the interchangeability requirements of gauge number SC-GL-57982

FIGURE 1. Contact assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration: See figure 1.

Material.

Block - Diallyl phthalate, type SDGF in accordance with MIL-M-14, color green.

Cover - Diallyl phthalate, type SDGF in accordance with MIL-M-14, color green

Caps - Polycarbonate in accordance with L-P-393, color gray.

Contacts - Beryllium copper, in accordance with QQ-C-530. Finish - gold, type II, grade D, Class 2, in accordance with MIL-G-45204.

Epoxy resin - Shall be nonconductive and have a contrasting color with all parts of the assembly.

Part number: M55074/4-01

Custodian:
Army - CR

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-A325)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.