INCH-POUND
MIL-C-55302/32E
31 October 1988


SUPERSEDING
MIL-C-55302/32D
23 July 1981

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: CONTACTS, SOLDER EYELET AND WRAPOST REMOVABLE TYPES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector contacts described herein shall consist of this specification and the latest issue of MIL-C-55302.

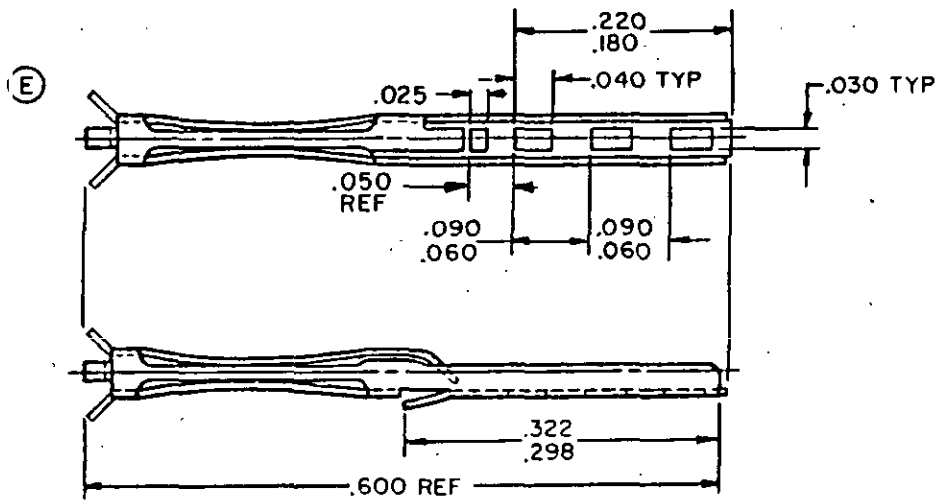

SOLDER EYELET-01

Inches	mm
.030	.76
.040	1.02
.060	1.52
.090	2.29
.180	4.57
.220	5.59
.298	7.57
.322	8.18
.600	15.24

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Maximum wire size, no. 26 AWG.

FIGURE 1. Contacts, removable types.

Ⓔ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

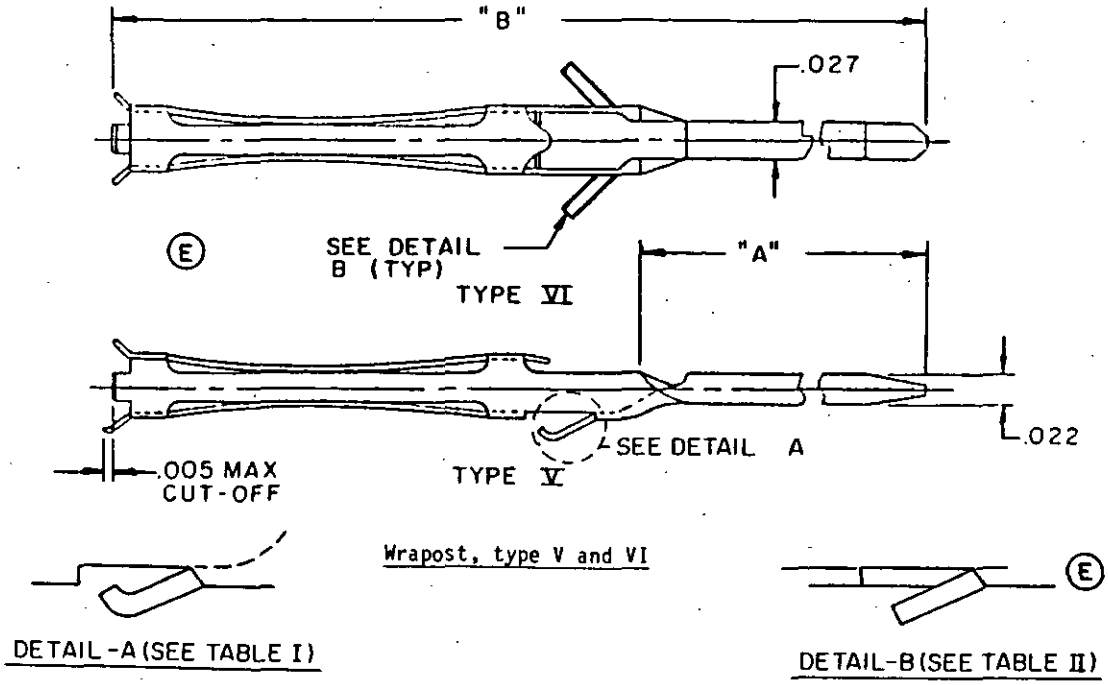


TABLE I. Detail A part numbers.

Wrapost contacts, type V		
Part number	A	B Max
M55302/32-02	.425	.795
M55302/32-03	.585	.955
M55302/32-04	.745	1.115

Inches	mm
.005	.13
.022	.56
.027	.69
.425	10.80
.585	14.86
.745	18.92
.795	20.19
.955	24.26
1.115	28.32

TABLE II. Detail B part numbers.

Wrapost contacts, type VI		
Part number	A	B Max
M55302/32-05	.425	.795
M55302/32-06	.585	.955
M55302/32-07	.745	1.115

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
Ⓔ 4. Use contact extraction tool M81869/9-01 for type V contacts.
5. Use contact extraction tool AMP part number 1-265871-7 for type VI contacts.

FIGURE 1. Contacts, removable types - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and tables I and II.

Material: Beryllium copper per QQ-C-533.

Plating (contact):

(E) Part number M55302/32-01:
Engagement area: Gold per MIL-C-55302 over .100 inch length over nickel per MIL-C-55302.

Termination area: Tin lead per MIL-C-55302, for .220 inch length over nickel per MIL-C-55302.

Other areas: Nickel plated per MIL-C-55302.

Part numbers M55302/32-02 through M55302/32-07: Entire part shall be plated with gold over nickel per MIL-C-55302.

QUALIFICATION AND QUALITY CONFORMANCE: Qualification and quality conformance requirements are not applicable. All contacts are tested in accordance with the applicable specification sheet.

SUPERSESSION DATA: See table III.

TABLE III. Supersession data.

(E)

Superseding part number M55302/32-	*Superseded manufacturer's* code 00779 part number
01	583218-2
02	2-583812-6
03	2-583812-8
04	3-583812-0
05	1-532466-2
06	1-532466-5
07	1-532466-8

(E) APPLICATION: Contacts, solder eyelet, are to be used with connectors conforming to MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, (type II). Contacts, *wrappost, are to be used with connectors conforming to* MIL-C-55302/27 (types V and VI) and MIL-C-55302/130 (type 2).

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, CR, MI
Navy - AS, OS, SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3645-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.