
INCH-POUND
MIL-DTL-55302/78D
12 November 2004
SUPERSEDING
MIL-C-55302/77C (USAF)
17 March 1989


DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: KEY, POLARIZING, CONNECTORS, ELECTRICAL PRINTED WIRING BOARDS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

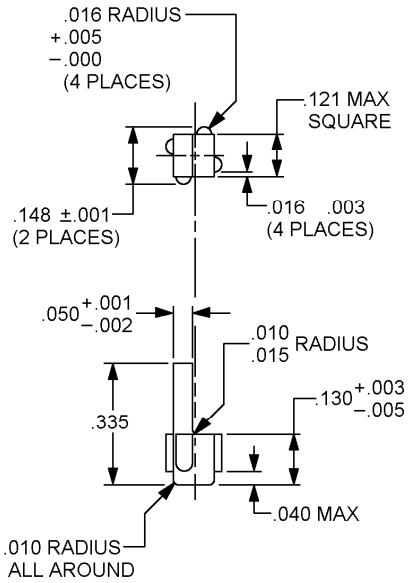

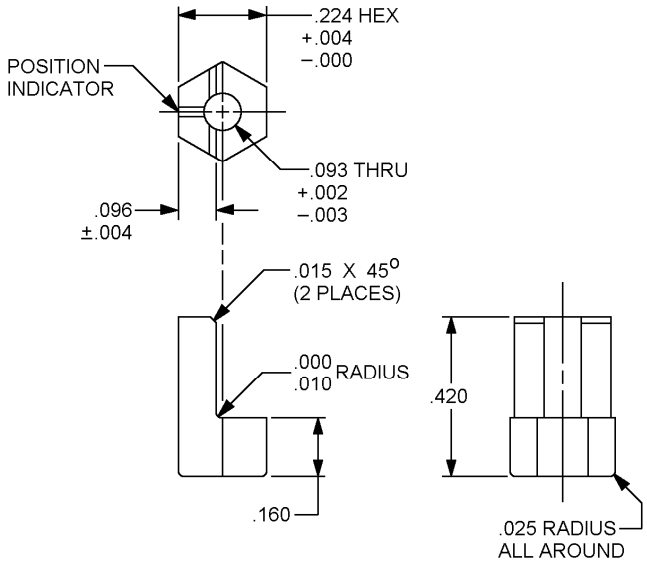

NOTES:
1. Material: Glass filled acetal plastic in accordance with ASTM D4181.
2. MIL-DTL-55302/75, and MIL-DTL-55302/166 through MIL-DTL-55302/170.

Square polarization

Patent number 3,611,272


NOTES:
1. Material: In accordance with L-P-410 (nylon 6/10)
2. MIL-DTL-55302/72, and MIL-DTL-55302/73.

Hex polarization

Patent number 3,582,867

FIGURE 1. Key polarizing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

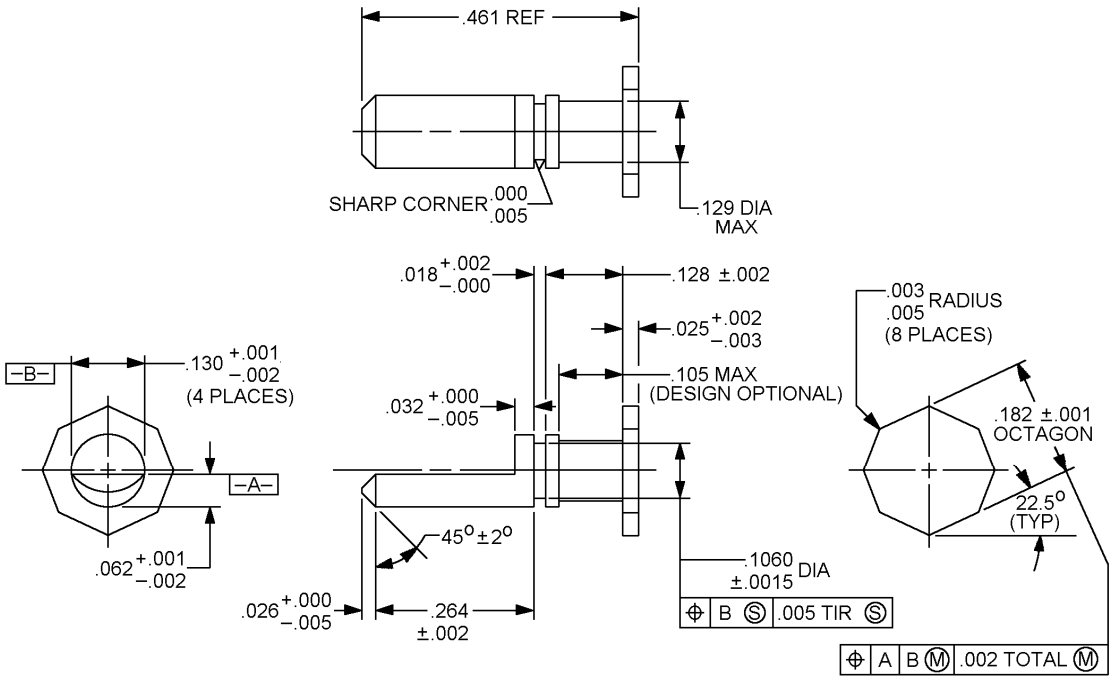


NOTES:
1. All dimensions are before coating.
2. Material is aluminum SAE-AMS-4150.
3. Coating: Anodize SAE-AMS-2470.
4. Installs in MIL-DTL-55302/76.

Polarization pin

Patent number 3,714,617

FIGURE 1. Key polarizing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

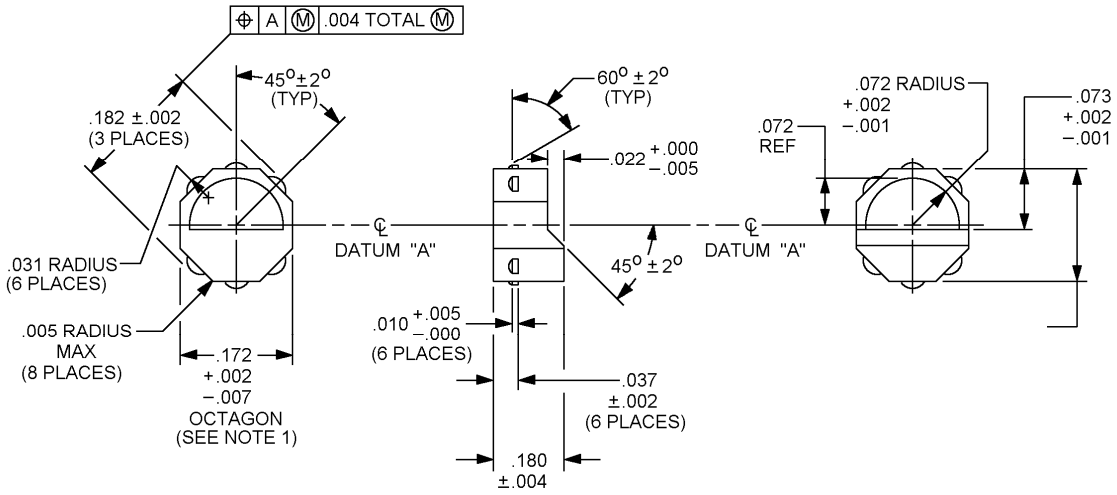

NOTES:
1. Indicated dimension applies for indicated length.
2. Material is in accordance with L-P-410 (nylon 6/6).
3. Installs in MIL-DTL-55302/77.

Bushing, polarization, octagon, molded

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.015	0.38	.037	0.94	.096	2.44	.160	4.06
.0015	0.038	.016	0.41	.039	0.99	.105	2.67	.172	4.37
.002	0.05	.018	0.46	.040	1.02	.1060	2.692	.180	4.57
.003	0.08	.022	0.56	.050	1.27	.121	3.07	.182	4.62
.004	0.10	.025	0.64	.058	1.47	.128	3.25	.224	5.69
.005	0.13	.026	0.66	.062	1.57	.129	3.28	.264	6.71
.007	0.18	.031	0.79	.072	1.83	.130	3.30	.335	8.51
.010	0.25	.032	0.81	.073	1.85	.141	3.58	.420	10.67
				.093	2.36	.148	3.76	.461	11.71

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).

FIGURE 1. Key polarizing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

Requirements:

Dimensions and configuration: See figure 1.

Material: See notes on figure 1.

Part or Identifying Number (PIN): M55302/78-(dash number from table I).

Used in connectors: See notes on figure 1.

TABLE I Dash number and dimensions.

Dash number	Description
01	Hex, polarization
01	Square, polarization
03	Bushing, polarization
04	Pin, polarization

Patent numbers 3,582,867 and 3,611,272. The Government has a royalty free license under these patents for the benefit of manufacturers of the items either for the Government or for use in equipment to be delivered to the Government.

Retention of qualification requirements: Not applicable.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/72
MIL-DTL-55302/73
MIL-DTL-55302/75
MIL-DTL-55302/76
MIL-DTL-55302/77
MIL-DTL-55302/166
MIL-DTL-55302/167
MIL-DTL-55302/168
MIL-DTL-55302/169
MIL-DTL-55302/170
L-P-410
ASTM D4181
SAE-AMS-2470
SAE-AMS-4150

Previous changes. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4440-003)

Review activities:
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.