INCH-POUND

MIL-T-55155/1B

19 March 1990


SUPERSEDING
MIL-T-55155/1A
27 October 1971

MILITARY SPECIFICATION SHEET

TERMINALS, FEEDTHRU (INSULATED), STYLE FT01

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

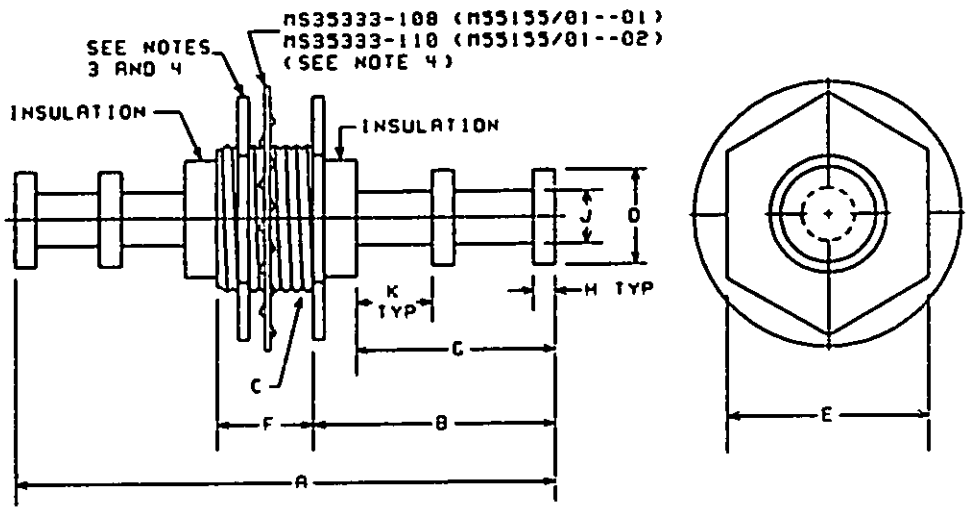

PART 1/ NUMBER	DIMENSIONS									
	A	B	C	D	E	F	G	H	-	K
M55155/01--01	.923	.367	1/4-28 UNF-2A	.062	.375	.250	.184	.028	.2-3	.054
M55155/01--02	1.307	.536	3/8-32 UNEF-2A	.080	.500	.375	.281	.032	.252	.093

FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Tolerance is ± .015 inch.
3. Hex nut, brass, 1/4-28 UNF-2B X .08 inch thick X .44 inch across flats (M55155/01--01); hex nut, brass 3/8-32 UNEF-2B X .08 inch thick X .56 inch across flats (M55155/01--02). 1/
4. The washer and the hex nut shall be plated with the same finish as that on the mounting base.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insulation material: Ceramic.

Dielectric withstanding voltage: See table I.

Table I. Dielectric withstanding voltage.

Part Number 1/	Pressure	Volts ac (rms) (min)
M55155/01--01	Atmospheric Reduced barometric	1,250 525
M55155/01--02	Atmospheric Reduced barometric	1,500 650

Pull: 10 pounds min.

Torque: 5 ounce-inches, min.

Type of mounting: Threaded metal bushing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

Part number in MIL-T-55155/1B 1/	Part number in MIL-T-55155/1A 2/
M55155/01--01	FT01-A01
M55155/01--02	FT01-A02

1/ The complete part number shall include the symbol for the insulation color (first dash) and the symbol for the conductor material and finish (second dash).

2/ The complete number included the symbol for the insulation color.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS
Air Force - 99
DLA-GS

User activities:
Army - AV
Navy - MC
Air Force -

Preparing activity:
Army - ER

(Project 5940-1099-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:29Z
Check the source to verify that this is the current version before use.