INCH-POUND
MIL-A-27670D(USAF)
15 DECEMBER 1994
SUPERSEDING
MIL-A-27670C(USAF)
16 AUGUST 1965

MILITARY SPECIFICATION

AMPLIFIER-INDICATOR GROUP INDICATED AIRSPEED A/A24G-10

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of aircraft indicated airspeed amplifier-indicator group, designated A/A24G-10.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-636 Box, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Oklahoma City Air Logistics Center/TICLA, 3001 Staff Drive, Tinker AFB OK 73145-5990 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6610

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation, Methods Of
MIL-C-675	Coating Of Glass Optical Elements (Anti-Reflection)
MIL-C-5015	Connectors, Electrical, "AN" Type
MIL-E-5400	Electronic Equipment, Aircraft, General Specification For
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification For
MIL-M-7793/6	Meter, Time Totalizing, Miniature, Digital, 115 Volts, 400 HZ
MIL-A-8625	Anodic Coatings, For Aluminum And Aluminum Alloys
MIL-T-25627	Transmitter, Synchro, Angle Of Attack Or Side Slip
MIL-L-27160	Lighting, Instrument, Integral, White, General Specification For
MIL-B-27497	Bearing, Jewel, Sapphire Or Ruby Synthetic
MIL-C-38037	Computer, Central Air Data CPU-43/A
MIL-C-83488	Coating, Aluminum, ION Vapor Deposited

STANDARDS

FEDERAL

FED-STD-595	Colors

MILITARY

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of U.S. Military Property
MIL-STD-461	Requirements For The Control Of Electromagnetic Interference Emissions And Susceptibility
MIL-STD-462	Measurement Of Electromagnetic Interference Characteristics
MIL-STD-470	Maintainability Program Requirements (For Systems And Equipments)
MIL-STD-471	Maintainability Demonstration
MIL-STD-704	Aircraft Electric Power, Characteristics
MIL-STD-781	Reliability Testing For Engineering Development
MIL-STD-810	Environmental Test Methods
MIL-STD-889	Dissimilar Metals
MIL-STD-970	Standard & Specification, Order Of Preference For The Selection Of
MIL-STD-2073-1	DOD Material Procedures For Development & Application Of Packaging Requirements
MS33558	Numerals And Letters, Aircraft Instrument Dial, Standard Form Of

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, BLDG 4D NPM-DODSSPf 700 Robbins Ave, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation. (Copies may be obtained from OC-ALC/LGTPL SPI 00-056-7151, Oklahoma Air Logistics Center/LGTPL, Tinker AFB OK 73145-5990).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing is this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.2) in accordance with 4.2.

3.2 Components. The amplifier-indicator shall consist of:

Indicator, Airspeed Mach Safe Speed AVK-16/A24G-10
Amplifier, Electronic Control ASK-10/A24G-10

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-970.

3.4 Materials

3.4.1 Fungus-proof materials. Materials that are nutrients for fungi shall not be used where it is practicable to avoid them. Where used and not hermetically sealed, they shall be treated with a fungicidal agent. If used with a hermetically sealed enclosure, fungicidal treatment shall not be required.

3.4.2 Metals. Metals shall be of a corrosion-resistant type or suitably treated to resist corrosion due to conditions likely to be encountered in storage or normal service.

3.4.2.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.4.3 Nonmagnetic materials. Nonmagnetic materials shall be used for all parts of the instrument, except where magnetic materials are essential.

3.4.3.1 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item.

3.4.4 Protective treatment. Materials that are utilized within the hermetically sealed case are suitably protected against corrosion.

3.4.5 Toxic and corrosive fumes. The materials, as installed and under the service conditions specified, shall not liberate gases or fumes which will result in corrosion that causes malfunction of equipment or discoloration of dials or indicator. Toxic gases or fumes that are detrimental to performance of the aircraft or health of personnel shall not be liberated under the service conditions specified herein.

3.5 Design and construction. The amplifier-indicator group shall be designed and constructed in accordance with figures 1 through 14 and shall have reliability consistent with the specified requirements and minimum weight specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.5.1 Life. The equipment shall be designed to have a reliable life of at least 1,000 hours without requiring servicing. The equipment shall be designed to have a minimum operating life of at least 2,000 hours with reasonable servicing and replacement of parts. The contractor shall prepare a list of parts requiring replacement within the minimum operating life of the equipment. Life requirements of lamps shall be in accordance with applicable specifications approved by the procuring activity.

3.5.2 Presentation.

3.5.2.1 Method of presentation. The method of presenting the information to the pilot shall be by means of a moving scale to be read against a fixed-center reference line for the aircraft mach number, indicated airspeed, and safe speed. The command and limit indications shall be by means of translational motion of the symbols along the graduated vertical scales. The scales and symbols shall be arranged as shown on figure 1.

3.5.2.2 Electrical synchro signal. The indicator shall present the following information derived from signal inputs in the form of electrical synchro signals from a central air data computer:

a. Aircraft mach number: Range, 0.2 to 1.0

b. Indicated airspeed: Range 50 to 600 knots

c. Safe speed: (In terms of angle of attack) -10° to 25° from an angle of attack transmitter

d. Command mach number: Range 0.2 to 1.0

e. Command airspeed: Range 50-600 knots.

3.5.2.2.1 Indicator synchros. Indicator, synchros or equivalent, shall be as follows:

a. Transmitting synchros (from CADC)

Aircraft mach - fine and coarse	AY50□42-A1
Indicated airspeed - fine and coarse	AY50□42-A1

b. Transmitting synchro (from angle of attack vane)
Angle of attack (safe speed) Clifton CGC-10-AS-7 or electrical equivalent

c. Indicator control transformer synchros (Receivers)

Aircraft mach	AY30□s-18-A1
Indicated airspeed	AY30□s-18-A1
Maximum safe speed	AY30□s-18-A1

3.5.3 Airspeed mach display. The airspeed-mach display shall conform to figure 1. The design shall be reasonably simple to permit overhaul or repair without requiring numerous special tools and fixtures. The amplifier-indicator group shall be so constructed as to withstand, without failure, the normal strains, jars, vibrations and such other conditions as are incident to shipping, storage, installation, and service use.

3.5.4 Maintainability. Ready access to the interior parts, terminals, and wiring of the amplifier and indicator shall be provided to permit adjustment, circuit checking, calibration, and removal and replacement of parts. If hermetic sealing is utilized, this requirement shall apply after removal of the unsealed case. The maintainability program requirements shall be in accordance with MIL-STD-470.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.5.5 Mean-time-between-failures (MTBF). The equipment shall have an MTBF of 600 hours based on a 90% confidence factor.

3.5.6 Compatibility and signal interchangeability. The AVK-16A24G-10 Indicator input requirements and ASK-10/A24G-10 Amplifier input and output requirements shall be interchangeable and compatible with the input and output characteristics of the following:

a. Computer, Central Air Data CPU-43/A in accordance with MIL-C-38037

b. AVK-16/A24G-10 Indicator manufactured by any prior alternate source

c. ASK-10/A24G-10 Amplifier; manufactured by any prior alternate source

d. Transmitter, Synchro, Angle of Attack or Side Slip in accordance with MIL-T-25627.

3.5.7 Jewel bearings. Jewel bearings shall be in accordance with MIL-B-27497.

3.6 Performance. The amplifier-indicator group shall be capable of meeting the requirements specified herein when subjected to the following conditions:

a. Temperature - Temperatures ranging from -55° to +71°C.
b. Scale error - Scale errors and tolerances specified in tables I, II, III, and IV.
c. Insulation leakage - Withstand a potential of 250V dc applied between any electrical pin contact and any metal part of the indicator case.
d. Vibration.
   (1) In accordance with Method 514.2 of MIL-STD-810.
   (2) In accordance with Method 514.2 of MIL-STD-810.
e. Temperature-altitude - Amplifier operation in accordance with figure 5.
f. Slew speed - Slew speed tolerances as specified in table III.
g. Altitude - Pressures ranging from 31.0 to 2.118 inches Hg.
h. Acceleration - In accordance with Method 513.2 of MIL-STD-810.
i. Shock - In accordance with Method 516.2 of MIL-STD-810.
j. Humidity - Relative humidity up to 100 percent.
k. Fungus - Exposure to simulated fungus growth as encountered in desert areas.
l. Salt fog - Exposure to simulated salt sea atmosphere.
m. Sand (fine dust) - Exposure to sand (fine dust) particles as encountered in desert areas.
n. Dielectric strength - Subjection to 250V 60 cps for five seconds.

3.6.1 Magnetic effect. The amplifier-indicator group shall not cause a free magnet to deflect more than 5° when the unit is held in various positions on an east-west line with its nearest part 12 inches from the center of the magnet in a magnetic field with a horizontal intensity of 0.18 ±0.01 oersted.

3.6.2 Electromagnetic interference. The amplifier-indicator shall meet the electromagnetic interference requirements of MIL-STD-461 as follows:

CE102	CS101	RE01	RS103
	CS114		
	CS115		
	CS116		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.6.3 Insulation breakdown. The amplifier shall withstand application of 500V for 5 seconds under the conditions specified in 4.6.10. The current leakage shall be not more than 4.5 ma.

3.7 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.8 Operation.

3.8.1 Aircraft mach number. The aircraft mach number moving scale shall be actuated by a servo mechanism with dual speed transmitting synchro input. The input to the instrument control transformer synchro shall be linearly proportional to mach number over the range of 0.2 to 1.0. The tape scale factor shall be 1.350 inches per 0.1 mach number.

3.8.1.1 Mach number mechanization. The servo-drive mechanism shall be so designed as to accurately position the moving scale at the center reference line. Provision shall be made to prevent the moving scale from being driven beyond specified limits. When the input signal is below 0.2 mach, the movable scale shall remain fixed at 0.2 mach. Electrical zero of the follow-up servo-synchro shall be at mach 0.2. Electrical scale factor shall be 1,000° per unit mach for the fine sycnhro and 200° per unit mach for the coarse synchro. Servo slew speed shall be at least seven mach per minute.

3.8.2 Command mach number. The command mach number symbol and associated numerical counter shall be actuated by the slew switch located below the mach tape.

3.8.2.1 Command mach number mechanization. The mechanism shall be designed to accurately position the command mach index at the appropriate position, with respect to the aircraft mach number moving scale, and this position shall also be displayed on the command mach counter. When the commanded mach number is beyond the visible range of the instrument dial, provision shall be made to disengage the drive mechanism; the index shall assume a position at the scale extremity and remain visible in the area marked B on figure 1. When the command index is positioned to any value on the aircraft mach number moving scale, there shall be no apparent relative motion between command index and moving scale resulting from servoed motion of the moving tape in either direction. Motion of either servoed element shall not result in interaction with the other. The reading of the command mach marker against the mach tape (when the command value is within the visible range of the mach scale) shall, at all times, read within 0.005 mach of the command value as read on the counter. When the switch is released, the servo shall provide suitable braking action to prevent coasting of the command index.

3.8.2.2 Maximum safe mach number. A fixed mach limit symbol shall be painted on the mach tape to indicate a mach limit of 0.825. The configuration and color shall be as shown on figure 1.

3.8.2.3 Indicated airspeed. The indicated airspeed moving scale shall be actuated by a servo mechanism with dual speed transmitting synchro input. The input to the sycnhro control transformer shall be linearly proportional to indicate airspeed over the range of 50 to 600 knots. Synchro electrical zero shall be at 100 knots. The tape scale factor shall be 1.25 inches per 50 knots, and the tape graduations shall be in increments of 10 knots starting at 50 knots. Numbered graduations shall be at 50-knot intervals,, starting at 50 knots, with each 20-knot between 100 and 200 knots numbered as shown on figure 1.

3.8.2.3.1 Mechanization. Mechanization shall be as specified in 3.8.2.1. When the signal input is below 50 knots, the moving scale shall remain fixed at 50 knots. Electrical scale factor shall be 166.67° per 100 knots fine and 33.33° per knots coarse. Servo slew speed shall be at least 2,000 knots per minute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.8.2.3.2 Maximum safe airspeed. A fixed symbol shall be painted on the tape to indicate an airspeed limit of 350 knots. The configuration and color shall be as shown on figure 1.

3.8.2.4 Command airspeed. The command airspeed index and associated numerical counter shall be actuated by the slew switch located below the IAS tape.

3.8.2.4.1 Command airspeed mechanization. The mechanism shall be designed to accurately position the command airspeed index at the appropriate position with respect to the airspeed moving scale; this position shall also be displayed on the command airspeed counter. When the command airspeed is beyond the visible range on the instrument dial, provision shall be made to disengage the drive mechanism and the index shall assume a position at the scale extremity and remain visible in the area marked B on figure 1. A center-lock position shall be provided on the command airspeed slewing switch which will position and retain the index on the center-reading reference line. In this position, the counter shall continuously provide numerical indication of indicated airspeed. The reading of the command airspeed marker against the airspeed tape (when the command value is within the visible range of the airspeed scale) shall, at all times, read within three knots of the command value as read on the counter. The servo shall provide suitable braking action to prevent coasting of the command index upon release of the switch.

3.8.2.5 Safe speed. The safe-speed moving scale shall be actuated by a servo mechanism with synchro input. The input to the indicator synchro control transformer shall represent a transmitting synchro angle range of +9° to -86°. Scale factor shall be 2.7° per 0.312 inch of tape.

3.8.2.5.1 Mechanization. Mechanization shall be as specified in 3.8.1.1 except that the servo mechanism shall position the moving scale in response to the angle of attack input from a remote computer. Electrical zero shall be at 0° angle of attack. Electrical zero of the indicator followup synchro shall position the tape display to the midpoint of the stall warning band.

3.8.2.5.2 Damping. A damping adjustment shall be provided, accessible externally on the amplifier, for the purpose of adjusting to optimum damping characteristics.

3.8.2.6 Counters. The command airspeed and mach counters shall be of the continuous-rotation type for the counter wheel displaying only the least significant digit. Counter wheels that operate intermittently shall not be used.

3.8.2.7 Slewing switches. Manually operated slewing switches as shown on figure 1 shall be provided to operate the command symbols and associated counters. The switch shall be spring centered. The slewing speed imparted to the command symbol shall be proportional to the amount the switch is displaced from center within the minimum and maximum speeds specified. The up position of the switch shall drive the command symbol and corresponding counter display toward increasing value of the function. The slew switch shall incorporate a detent that will permit indexing of one unit on the associated counters. The slew switch dimensions shall be in accordance with figure 15.

3.8.2.8 Elapsed time indicator. A 10,000-hour four digit type elapsed time indicator conforming to MIL-M-7793/6 shall be provided and so mounted in each indicator that the dial is visible on the side or rear of the case.

3.8.2.9 Decompression. The indicator shall be so designed as to withstand explosive decompression of the surrounding atmosphere. Operation shall not be affected when a pressure difference of 16 inches of mercury is applied instantaneously between the interior and exterior of the case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.8.2.10 Self-test circuit. A self-test circuit shall be provided in the indicator so that the mach and airspeed tapes may be positioned at a present value.

3.8.2.11 Monitor circuits. Monitor circuits shall be provided that will detect malfunctions in the airspeed and mach components and in the intercabling, including the transmitting synchro within the air data system. Malfunction shall cause the IAS and mach warning flags to appear. A calibrated series voltage (stick-off) shall be included in the monitor circuits to provide self-test capability. This series voltage, which is equivalent to the maximum trip level, for airspeed only, shall cause the warning flag to appear when the excitation voltage is removed from the air data transmitter.

3.8.2.12 External pressure. The indicator shall withstand an external pressure of 56 inches Hg absolute without failure of the hermetic seal or cover glass, and without such distortion of the case that would affect subsequent normal operation.

3.8.2.13 Circuit isolation. The angle of attack display and transmitter circuits shall be electrically isolated, except for ground faults, from the remainder of the indicator display circuits through the use of a one-amp fuse housed in the amplifier in an area that is not hermetically sealed.

3.8.3 Amplifiers. The servo amplifiers shall be transistor-mag or transistor type amplifiers. The design shall provide for plug-in modules for the power supply, auxiliary circuits, and amplifier circuits. Envelope dimensions shall not exceed those specified on figure 8. The amplifier shall be equipped with a mounting base in accordance with figure 4.

3.8.3.1 Servo-response. Response of the airspeed, mach, safe speed, and angle of attach servos shall be as follows:

Function	Bandwidth	Damping Ratio
Airspeed	3-8 Hz	0.2 to 0.7
Mach	3-9 Hz	0.4 to 0.7
Safe speed (Angle of attack)	variable 2 to 5 Hz	0.4 to 0.5 minimum range

3.9 Power requirements. The equipment shall meet all applicable requirements of MIL-STD-704 and shall operate from the power defined therein. The power requirements shall be of the following type and shall not exceed the indicated amounts:

A-C Power

Operating limits: 102 to 124V
Standby voltage limits or emergency supply: 90 to 130V
Operating frequency limits: 380 to 420 Hz
Standby frequency limits or emergency supply: 380 to 420 Hz
Max operating voltamperes: 98
Max warmup time: one minute if temperature has been -35°C or higher,
three minutes if temperature has been -55°C.

3.10 Lighting. The indicator shall be lighted internally in accordance with MIL-L-27160. Lighting acceptability shall be based on visual comparison with a prime standard indicator only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.10.1 Prime standard. The prime standard lighting reference instrument shall be prepared as follows: A minimum of 20 areas, covering the entire face of the indicator, shall be measured for brightness level in foot-lamberts. The reference instrument and its recorded overall brightness measurements shall be approved by the procuring activity.

3.10.2 Integral lighting supply. A 400 Hz voltage, variable from 0 to 5V rms, shall supply power for internal lighting for both normal and emergency operation. The frequency of the supply voltage shall be as specified in MIL-STD-704.

3.11 Reflective surfaces. All reflecting glass surfaces shall be provided with a reflection reducing coating which meets the requirements of MIL-C-675, in addition to withstanding the environmental conditions specified herein, except that the following reflectance tolerances shall apply:

Angle of Incidence	Wave Length Millimicrons	Percent Reflectance
0°	450 to 675	0.6 Maximum
0°	425 to 700	0.5 Average
30°	450 to 625	1.0 Maximum
30°	25 to 700	0.5 Average.

3.12 Connectors. Electrical connectors used on the indicator case shall be of the hermetic-seal type and shall conform electrically to MIL-C-5015. Miniature connectors, Scintilla type as specified herein, or the electrical equivalent, shall be utilized. Keying provisions shall be made where necessary. Connector pin arrangements shall be as specified in table IV.

3.12.1 Extra contacts in receptacles. Extra contacts shall not be required unless necessary for conducting tests.

3.13 Excitation. Unless otherwise specified, excitation for all remote transmitting synchros or potentiometers shall be furnished from the amplifier-indicator.

3.14 Electron tubes. Electron tubes shall not be used.

3.15 Electronic components. The electronic components shall be in accordance with MIL-E-5400.

3.16 Case. The amplifier-indicator case shall be of nonferrous, low-density material and shall conform to figures 3, 6, and 8 with respect to dimensions and tolerances. The case shall be finished in durable dull black, color No. 37038 of FED-STD-595.

3.16.1 Case hermetic seal. The case shall provide a hermetically sealed enclosure for the internal mechanism. The design of the case shall be such that the internal mechanism may be removed from the case, replaced, and the case resealed. Tear strips, provided for this purpose, and filling tubes shall not have end pieces protruding outside the case dimensions. Filling tubes, if used, shall not be left exposed to possible damage from impact or tampering.

3.16.2 Filling medium. The filling medium shall be at least 98 percent pure, free of dust particles, and contain not more than 0.006 milligram of water vapor per liter (dewpoint -65°C) at the filling pressure. The filling medium shall be either 100 percent helium or a mixture of 90 percent nitrogen and the remainder helium. The absolute pressure of the filling medium shall be approximately one-half to one atmosphere as required. Where practicable, the 100 percent helium shall be utilized.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.17 Dial.

3.17.1 Dial layout. The dial layout and dimensions shall be in accordance with figures 1 and 2.

3.17.2 Dial markings. All markings shall be so durable as to withstand usage encountered in service. The style and proportion of numerals and graduations shall conform to FIGURE 1.

3.17.3 Numerals. Numerals shall distinctly indicate the graduation to which each applies. If practicable, each shall be so placed that the center of mass of the numeral will be on a line joining the appropriate graduation. There shall be no doubt as to which graduation the numeral applies. When serial numerals are used in one group, the space between shall be approximately 0.016 inch.

3.17.4 Dial to lighting wedge distance. The distance from dial to rear surface of lighting wedge shall not exceed 0.200 inch.

3.18 Screw threads. Unless otherwise specified, the threads of all machine screws shall conform to MIL-S-7742.

3.19 Weight. The weight of the indicator shall not exceed 10 pounds 8 ounces and the weight of the amplifier, including the mounting base, shall not exceed 9 pounds 2 ounces.

3.20 Finishes and protective coatings

3.20.1 Plating. Plating shall not be required on normally lubricated parts such as gears, bearings, and shafts (fabricated from brass), bronze, or corrosion-resistant steel.

3.20.2 Steel parts. Steel parts shall be coated with ion vapor deposited aluminum where practical, in accordance with MIL-C-83488, Type I or II as applicable and of a class that is adequate to achieve the degree of protection required. Other protective coating, in lieu of MIL-C-83488 may be used if demonstrated to be satisfactory by cognizant engineering activity. Cadium plating must be avoided when satisfactory alternate processes can be used.

3.20.3 Aluminum alloy parts. Aluminum alloy parts shall be covered with an anodic film in accordance with MIL-A-8625, except that small holes, straight threads, and case inserts need not be anodized.

3.21 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130. The component nomenclature shall be as follows (as applicable):

Indicator, Airspeed Mach Safe Speed AFK-16/A24G-10
or
Amplifier, Electronic Control ASK-10/A24G-10.

3.22 Government loaned equipment. When specified (see 6.2), one each of the following equipment will be loaned by the Government to the contractor upon his request:

a. Computer, Central Air Data CPU-43/A in accordance with MIL-C-38037.
b. AVK-16/A24G-10 indicator
c. ASK-10/A24G-10 amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

3.23 Workmanship. The amplifier-indicator group, including all parts and accessories, shall be sufficiently high grade to ensure satisfactory operation and service life. Particular attention shall be given to neatness and thoroughness of marking of parts and assemblies, and freedom of parts from burrs and sharp edges.

3.23.1 Dimensions. Dimensions and tolerances not specified shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the equipment, they shall be held or limited accordingly.

3.23.2 Gears. Gear assemblies shall be properly aligned and meshed, and shall be operable without interference, tight spots, loose spots, or other
irregularities. Where required for accurate adjustments, gear assemblies shall be free from backlash.

3.23.3 Cleaning. After final assembly, the equipment shall be thoroughly cleaned and loose, spattered, or excess solder, metal chips, resin flash that may crumble, and other foreign material removed..

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)
b. Quality conformance inspection (see 4.5)
c. Where specified, the indicator and the amplifier shall be tested as individual components.

4.3 Inspection conditions. Unless otherwise specified, all inspection shall be performed in accordance with the test conditions specified in this specification.

4.3.1 Standard atmospheric conditions. Whenever the pressure, temperature, tests are made with atmospheric pressure or room temperature differing materially from the above values, proper allowance shall be made for the difference from the specified condition.

4.3.2 Vibration. Unless otherwise specified, the indicator shall not be subjected to any form of vibration or tapping during the performance of any of the tests specified in this specification.

4.3.3 Attitude. Unless otherwise specified, the indicator shall be tested in the normal operating position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.3.4 Electrical power. Unless otherwise specified, the indicator shall be tested with 115V 400 cycle a-c power. The voltage and frequency shall be maintained within ±2 percent and 28V ±2 percent d-c power.

4.3.5 Standard test equipment. The indicator shall be tested with standard AY-201S-1-B synchros (or equivalent) and precision potentiometers with a resistance of 10K ohms ±5 percent, 2.5w at 25°C, and a resolution of 0.01 percent. The monitor transmitter shall be an AY50□-42-A1 or electrical equivalent.

4.3.6 Test synchros. The synchros transmitters used to provide indicator input functions shall be accurate to within ±0.1° either by selection or calibration.

4.3.7 Test potentiometers. The potentiometers used to provide indicator input functions shall have a linearity of at least 0.01 percent.

4.3.8 Standard test amplifier. The standard test amplifier shall be a standard production amplifier which has passed all individual test specified herein.

4.3.9 Electrical zero and rotation reference. The indicator synchros shall be so oriented electrically that each function will be servoed to the indication listed in table V when a standard test transmitter is set at electrical zero and connected to the indicator and amplifier in accordance with TABLE IV.

4.3.9.1 Indicated airspeed. The aircraft mach and indicated airspeed coarse synchros shall be checked simultaneously with their respective fine synchros. After the function is servoed to the EZ point by the fine autosyn, the coarse synchros shall be excited as shown on figure 9. The vacuum tube voltmeter shall indicate less than 250 mv.

4.3.9.2 Transmitter rotor. A clockwise rotation of the standard test transmitter rotor (viewed from the shaft end) shall cause increasing function.

4.3.9.3 Standard test transmitter. A standard test transmitter is as follows: The rotor leads are arbitrarily labeled H and C. One stator is arbitrarily labeled Z. Z is connected to C and 26V 400 Hz is applied across H-C. At EZ, there will be a null voltage measured across the two unlabeled stator leads (V_1). The voltage between H and either of the unlabeled stator leads shall be 38V (approximate) (V_2). If this voltage is 15V (approximate), the synchro is 180° away from EZ (see figure 10). If clockwise rotation (viewed from the shaft end) of the synchro rotor causes V_3) to increase (within 30° of EZ), V_2 is between X and Z.

4.3.10 Potentiometer zero. Unless otherwise specified, the low end of the potentiometer shall correspond to the low end of the function.

4.3.11 Amplifier test equipment. The test equipment shall not load or affect normal operation of the unit under test. The tolerances specified are acceptable limits of performance and are not to be confused with meter accuracy's. The following instruments, or their equivalents, may be used:

a. Vacuum Tube Voltmeter Model 400C
Hewlett-Packard Co.
Palo Alto, California

b. Megger
James Biddle Co.
Philadelphia, PA

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

c. Cathode-Ray Oscilograph Type 304A
Allen B. Dumount Laboratories, Inc.
Harrison, N.J.

d. Voltohmmeter-Senior Volt Ohmyst WV-98A
Radio Corporation of America
Harrision, N. J.


e. Phase Comparator.

4.3.11.1 Amplifier attitude. Unless otherwise specified, the unit under investigation shall be tested in its normal operating position.

4.3.11.2 Power supply.

4.3.11.2.1 Alternating current. The amplifier shall be tested with 115 ±3V rms, 400 cycles, single phase, with a total harmonic distortion less than five percent and a maximum frequency deviation of less than one percent, capable of supplying 150 va.

4.3.11.2.2 Phase. A voltage specified as being "from pin X to pin Y" shall be measured, using pin X as a reference or ground terminal. The direction of leading phase angle can be established by use of the following circuit:

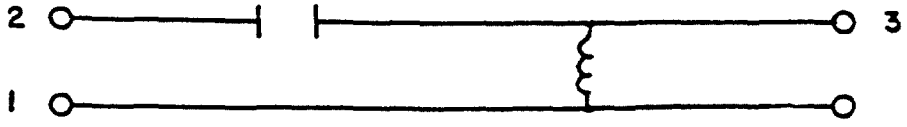

In this circuit, the voltage from pin 1 to pin 3, V_{13} leads the voltages from pin 1 to pin 2, V_{12}. All phase measurements shall be taken with respect to the a-c excitation measured from pin A to pin H on connector PT02A-12-10PW.

4.3.11.2.3 Direct current. Twenty-eight ±IV capable of supplying 250 ma shall be applied. Ripple and noise on direct current shall not exceed 5 percent.

4.3.11.3 Signal source (AC). The 400-cps signal source shall have the following characteristics:

a. An output impedance not exceeding 1,000 ohms
b. A voltage range of 0 to 1V continuously variable
c. A phase of 0° and 180° ±3°, selectable
d. A distortion not exceeding 5 percent.

4.3.11.4 Signal source (DC). The d-c signal source shall have the following characteristics:

a. An output resistance not exceeding 1,000 ohms
b. A voltage range of 0 to 1V continuously variable
c. Polarity - Both polarities shall be available (positive and negative)
d. Ripple - The total rms voltage appearing at the signal source shall not exceed 2.0 mv.

4.3.11.5 Loads. Unless otherwise specified, the loads (Z) specified herein shall consist of 155 /40° ±1 percent ohms, measured at 26V 400 cps unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.4 First article inspection

4.4.1 Inspection samples. The first article inspection samples shall consist of three amplifiers and three indicators representative of the preproduction equipment. Samples shall be identified with the manufacturer's part number and such other information as required by the procuring activity. The samples that were tested shall be submitted to the procuring activity.

4.4.2 First article inspections. The first article inspections shall consist of all the tests specified under 4.6.

4.5 Quality conformance inspections. Quality conformance inspections consist of:

a. Individual tests
b. Sampling plans and tests.

4.5.1 Individual tests (indicator). Each indicator shall be subjected to the following tests as described under 4.6:

a. Examination of product
b. Functional check
c. Synchro correspondence
d. Indicator case leak
e. Dielectric strength
f. Scale error
g. Warning flag
h. Slew speed
i. Lighting

4.5.1.1 Individual tests (amplifier). Each amplifier shall be subjected to the following tests as described under 4.6:

a. Examination of product
b. Insulation breakdown
c. Leakage test
d. Circuit connections
e. Voltage and current measurements
f. Null
g. Gain
h. Phase shift
i. Saturation
j. Power consumption
k. Functional test.

4.5.2 Sampling plans and tests.

4.5.2.1 Sampling plan A (indicator). One indicator, selected at random from each 100 or less produced on the contractor or order, shall be subjected to the following tests as described under 4.6:

a. Individual tests
b. Low temperature operation, indicator
c. High temperature operation, indicator

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

d. Vibration error
e. Frequency response test
f. Lighting.

4.5.2.1.1 Sampling plan A (amplifier). One amplifier, selected at random from each 100 or less produced on the contractor or order, shall be subjected to the following tests as described under 4.6:

a. Individual tests
b. Low temperature operation, amplifier
c. High temperature operation, amplifier
d. Vibration.

4.5.2.2 Sampling plan B (indicator). Unless otherwise specified, three indicators shall be selected at random from the first 15 items on the contract or order and subjected to the following tests as described under 4.6. When a change is made in design or material which affects the performance of the indicator in any of these tests, the tests so affected shall be performed on the number of new units specified above.

a. Sampling plan A tests
b. Magnetic effect
c. Vibration failure, indicator
d. Acceleration, indicator
e. Humidity, indicator
f. Fungus resistance, indicator
g. Salt fog, indicator
h. Altitude
i. Sampling plan B tests of MIL-L-27160
j. Decompression test
k. Compatibility and signal interchangeability tests
l. External pressure.

4.5.2.2.1 Sampling plan B (amplifier). Unless otherwise specified, three amplifiers shall be selected at random from the first 15 items on the contract or order and subjected to the following tests as described under 4.6. When a change is made in design or material which affects the performance of the amplifier in any of these tests, the tests so affected shall be performed on the number of new units as specified above.

a. Sampling plan A tests
b. Extreme temperature exposure
c. Temperature-altitude test
d. Vibration failure, amplifier
e. Shock
f. Acceleration, amplifier
g. Humidity, amplifier
h. Electromagnetic interference
i. Salt fog, amplifier
j. Fungus resistance, amplifier
k. Magnetic property, amplifier
l. Compatibility an signal interchangeability tests

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.5.2.3 Rejection and retest. When on item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure are determined. After corrections have been made, all necessary tests shall be repeated.

4.5.2.3.1 Individual tests may continue. For operational and production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or later produced shall not be made until it is determined that items meet all the requirements of the specification.

4.5.2.4 Sampling plan C. Unless otherwise specified (see 6.2), two systems (indicators and amplifiers) shall be selected at random from the first 10 of each production quantity of 150 or fraction thereof and subjected to the test specified in 4.6.42.2. Accept/reject criteria shall be as specified therein.

4.5.2.5 Sampling plan D. Unless otherwise specified (see 6.2), four systems (indicators and amplifiers) shall be selected at random from the first 10 of each production quantity of 150 or fraction thereof and subjected to the test specified in 4.6.42.2. Accept/reject criteria shall be as specified therein.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.6 Test methods.

4.6.1 Examination of product. The indicator and the amplifier shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, and markings.

4.6.2 Functional check. The functional check shall be performed prior to final sealing and final inspection of the indicator. The indicator functions shall be cycled simultaneously at the rate of one cycle every two minutes for a minimum of two hours. A cycle shall consist of the excursion from minimum value of the function to maximum value, and return to minimum value. The indicator shall meet all requirements after completion of the functional check.

4.6.3 Synchro correspondence. Any indicator section that has a dual speed input shall have these synchros inspected to assure that the coarse synchro is set in satisfactory correspondence with its associated fine synchro. The coarse synchros shall be considered to be in satisfactory correspondence when the rotor output is less than 150 mv with the stator excited as on figure 9 for a fine synchro setting of precisely EZ. The 10V supply may be replaced by a precision synchro transmitter set precisely at EZ.

4.6.4 Leak tests.

4.6.4.1 Indicator case leak. The indicator shall be filled with a dust-free 10-percent-helium 90-percent-nitrogen mixture at a pressure of approximately one atmosphere and with a dewpoint below -65°C. Following final sealing, the indicator shall be tested for case leaks. The leak rate shall not exceed 7.5 micron cubic feet per hour.

4.6.4.2 Leakage test. Each module of the amplifier unit shall be marked indicating that it has been subjected to a leakage test and that the leakage rate of helium, as detected by a mass spectrometer, did not exceed 0.1 micron cubic foot per hour at a pressure differential of one atmosphere.

4.6.5 Dielectric strength. The application of 250V 60 cps between the pins and the shell of the connector for five seconds shall cause no evidence of voltage break-down, pin to be exempted from this test shall be identified in installation drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.6 Scale error.

4.6.6.1 Aircraft mach. The coarse synchro shall be set at the value specified in table I. The tape shall be brought into the specified reading using the fine synchro only and being careful to approach from the right direction.

4.6.6.1.1 Mach accuracy. Test readings shall be obtained from both function increasing and function decreasing. No readings shall be in error in excess of 5.0° (0.005 mach) as read on the fine synchro transmitter.

4.6.6.2 Command mach correlation. Not only shall each presentation meet its individual accuracy requirements but they shall also maintain close correlation between themselves.

4.6.6.2.1 Command mach correlation accuracy. The marker reading shall not differ from the counter reading at any test point by more than 0.005 mach.

4.6.6.2.2 Command mach disengagement. When the transfer function commands a position beyond the viewing range of the indicator, the marker shall position itself at the window extremities, in view, and resume indexing against the aircraft mach tape when that portion of the tape is stationed in the window area.

4.6.6.2.3 Command mach disengagement. With dual speed synchros set in 0.2 mach on the mach tape, the following shall apply:

a. Set in 1.0 mach with the command slew switch. The marker shall position itself at the lower extremity of the window.
b. Set in 1.0 mach with the dual synchro inputs.
c. The tape shall so position the marker that some part of the marker is obscured by the lubber line.
d. Set in 0.2 mach with the command slew switch.
e. The marker shall position itself at the upper extremity of the window.
f. Set in 0.2 mach with the dual synchro inputs.
g. The tape shall so position the marker that some part of the marker is obscured by the lubber line.
h. The counter shall display the command mach throughout.

4.6.6.3 Manual mode. The manually operated slew switch below the mach window actuates the command marker and the command counter. The up position of the switch shall increase command function. The down position shall decrease command function. The rate of slew shall be proportional to switch displacement.

4.6.6.4 IAS (indicated airspeed). The coarse synchro shall be set at the values specified in TABLE II,. The tape shall be brought into the specified reading using the fine synchro only, being careful to approach from the right direction.

4.6.6.4.1 IAS accuracy. Test readings shall be obtained for increasing function. No readings shall be in error in excess of 1.67° (1 knot) as read on the fine synchro transmitter. The following stations shall also be checked for a decreasing function: 200, 400, and 600 knots.

4.6.6.5 Command IAS correlation. Not only shall each presentation meets its individual accuracy requirements, but they shall also maintain close correlation between themselves.

4.6.6.5.1 Command IAS correlation accuracy. The marker reading shall not differ from the counter reading at any station by more than three knots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.6.5.2 Command IAS disengagement. When the transfer function commands a position beyond the viewing range of the indicator, the marker shall position itself at the window extremities, in view, and resume indexing against the tape when that portion of the tape is stationed in the window area.

4.6.6.5.3 Command IAS disengagement test. With dual speed synchros set in 100 knots on IAS tape, the following shall apply:

a. Set in 600 knots with the command slew switch.
b. The marker shall position itself at the lower extremity of the window.
c. Set in 600 knots with the dual synchro inputs.
d. The tape shall so position the marker that some part of the marker is obscured by the lubber line.
e. Set in 100 knots with the command slew switch.
f. Set in 100 knots with the dual synchro inputs.
g. The tape shall so position the marker that some part of the marker is obscured by the lubber line.
h. The counter shall display the command IAS throughout.

4.6.6.6 Manual mode. The manually operated slew switch below the IAS window actuates the command marker and command counter when it is moved in the vertical plane. The up position of the switch shall increase command function and the down position shall decrease command function. The rate of slew shall be proportional to switch displacement.

4.6.6.7 Centering transmitter. The side-throw position of the IAS switch shall detent the lock into place and actuate and position the command marker to the lubber line to within ±1 knot.

4.6.6.7.1 Conjunction. The centering transmitter may be checked in conjunction with the scale error test for the IAS tape.

4.6.6.7.2 Center-lock operation. With the centering transmitter engaged, the command IAS counter shall continuously provide numerical indication of the air-speed tape reading.

4.6.6.7.3 Centering accuracy. With the transmitter set at the angles listed in TABLE II, the counter readings shall be accurate to within three knots, except that between the range of 140 knots to 250 knots, the readings shall be within ±1 knot. Readings shall be taken in an increasing direction. The following stations shall also be checked in a decreasing direction: 200, 400, and 600 knots.

4.6.6.8 Safe speed (angle of attack). The test points listed below shall be brought under the lubber line, being careful to approach from the right direction. The transmitter angle shall be recorded.

Test Points	Transmitter Angles
Midpoint of stall warning band	EZ
Apex of triangle (1.2)	-35.1°
Base of triangle (1.3)	-51.3°
Base of rectangle (1.4)	-66.15°

4.6.6.8.1 Safe speed accuracy. Readings shall be taken in both increasing and decreasing directions. No reading shall be in error in excess of a central transformer followup synchro angle equivalent to 0.75°.

4.6.6.9 Position error. There shall be no shift of any of the presentations due to indicator attitude. With al servoes at null, change the attitude of the indicator, then observe and record change in any reading.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.7 Mach warning flag. When the indicator is connected to the test amplifier and the mach tape satisfies the input signal, the flag shall disappear from view.

4.6.7.1 IAS warning flag. When the indicator is connected to the test amplifier and the IAS tape satisfies the input signal, the flag shall disappear from view.

4.6.7.2 Self-test circuit. Connecting pin G of PT1H-18-32P to 28 ±5V dc (by closing self-test switch) shall result in the mach tape being positioned at 0.92 ±0.005 mach number and the airspeed tape being positioned at 225 ±2.0 knots. The low side of the 28V dc shall be connected to frame ground. During the period in which the tapes are being positioned, the IAS warning flag shall be in view if the IAS is at least four knots from the self-test point at initiation of the test. The mach warning flag shall be in view if the mach function is at least 0.005 mach from the self-test point.

4.6.7.3 Monitoring circuit. The airspeed and mach monitor shall detect the following malfunctions:

a. Inaccuracies in excess of four knots and 0.007 mach
   (Note: The monitor shall not trip for inaccuracies less that two knots or 0.003 mach and shall not produce nuisance trips during the functional test (4.6.18))
b. Fine transmitter or C. T. stator or rotor failure due to actual component failure or intercabling failure
c. Loss of power to fine transmitter
d. Coarse transmitter or C.T. stator failure due to actual component failure or intercabling failure
e. Slippage of the airspeed or mach tape resulting in an error of four knots or 0.007 mach
f. Removal of excitation power to the monitor transmitter for airspeed only.

Rotation of the monitoring test transmitter to angles listed in tables I and II (fine transmitters) 3.33° shall not cause the monitor flags to appear. Rotation of the test transmitters to angles of 6.67° from those listed in the tables shall cause the warning flags to appear. This test shall be performed at the 100-, 300-, and 500-knot test values and at the 0.4-, 0.6-, and 0.8-mach test values.

4.6.8 Slew speed. Using a stop watch, record the time for full excursion of the various presentations listed in table III. The times shall not exceed those specified for either increasing or decreasing function.

4.6.9 Lighting.

4.6.9.1 Visual comparison. Indicator lighting shall be checked by comparison with a prime standard as defined in 3.10.1. The prime standard and the instrument under test shall be placed side by side, at eye level. Both units shall be connected to a common variable source (0-5V). The brightness of the two units shall be compared with 2.85V ±0.1V applied to the standard and 2.85V ±0.1V applied to the unit under test. If the brightness lighting of the two units appears the same visually, the unit under test shall be considered acceptable. If any area of the instrument under test appears visually to differ from the same area of the prime standard, it shall then be subjected to all display tests listed in MIL-L-27160 and sufficient data shall be taken to substantiate conformance to the display requirements of MIL-L-27160.

4.6.9.1.1 Color comparison. Apply 4.5V to the prime standard and the indicator being tested. The two indicators shall be compared and shall visually appear identical in color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.9.2 Stray light. The lighting system shall be housed to prevent the leakage of stray light and to shield all lamp filaments from direct view. Stray light measurements shall be made as follows: A flat white reflecting surface of 85 ±5 percent reflectance shall be placed perpendicular to the front cover glass and parallel to the top edge of the mounting flange. Brightness readings shall be made looking down (perpendicular) on this reflecting surface and one inch in front of the cover glass. When the reflecting surface is positioned in the lower half of the display, the readings shall not exceed 1.5 foot-lamberts, and when positioned in the upper half, shall not exceed 0.2 foot-lambert. Measurements shall be repeated looking upon the reflecting surface. In no case shall the readings exceed 0.2 foot-lambert. All measurements shall be made at 4.5 ± 0.1V.

4.6.10 Insulation breakdown. This test shall be performed with the equipment de-energized and not connected to the rest of the circuitry, and with the chassis ground lugs removed from ground. Application of the specified sine wave rms voltage at commercial frequency between each terminal designated and the case for a period of 5 seconds shall not cause insulation breakdown. The current leakage shall not exceed 4.5 ma.

Test Voltage	Connector	Pin
500V	10PW	A

CAUTION - This is a destructive test and shall not be performed repeatedly.

4.6.11 Circuit connections. The airspeed, mach, and safe speed amplifier shall consist of five separate signal channels (aircraft mach, command mach, indicated airspeed, safe speed, and command airspeed channels) having a common power transformer. Each channel shall be tested separately. The load on each channel shall be 155 ohms /40° ±1 percent. The common ground shall be used for all loads. Connection between output pins shall be removed when the load is removed.

4.6.12 Voltage and current measurements

4.6.12.1 A-C voltages. The a-c voltages and their corresponding phase angles shall be measured with respect to reference phase from ground to each of the following designated pins:

Connector	Pin	RMS Voltage	Phase
41PW	S	26 ±2 percent	0° ±5°
10PW	C	18 ±2V	0° ±5°
41PW	I	18 ±2V	0° ±5°
41PW	b	9 ±2 percent	0° ±5°
41PW	M	26 ±2 percent	0° ±5°
41PW	L	9 ±2 percent	0° ±5°
41PW	g	26 ±2 percent	0° ±5°
41PW	E	9 ±2 percent	0° ±5°
41PW	a	9 ±2 percent	0° ±5°
41PW	r	26 ±2 percent	0° ±5°

4.6.12.2 IAS and mach flag circuits. With proper application of power to the system, the flags shall disappear from view.

4.6.13 Null.

4.6.13.1 Safe speed, amplifier. With the input shorted, the total rms voltage across the load shall not exceed 900 mv.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.13.2 Command mach. amplifier. With the a-c input shorted, the total rms voltage across the load shall not exceed 900 mv.

4.6.13.3 Aircraft mach. amplifier. With the fine input shorted, the total rms voltage across the load shall not exceed 900 mv.

4.6.13.4 Indicated airspeed amplifier. With the fine input shorted, the total rms voltage across the load shall not exceed 900 mv.

4.6.13.5 Command airspeed. amplifier. With the a-c input shorted, the total rms voltage across the load shall not exceed 900 mv.

4.6.14 Gain.

4.6.14.1 Safe speed. amplifier. With an input signal of 10 mv (0° and 180°), the output shall be 5 ±1.5V.

4.6.14.2 Command mach. amplifier. With an input signal of 10 mv (0° and 180°), the output shall be 5 ±1.5V.

4.6.14.3 Aircraft mach. amplifier. The gain of the amplifier with the signal applied to the coarse input terminals and fine input terminals shall be as follows:

a. These tests shall be made for both polarities

b. Fine input - The output shall be 5 ±1.5V when 12 mv is applied to the fine input terminals

c. Coarse input - When the coarse input is 150 mv, the output shall not exceed 1.5V. When the coarse input is 1.0V, the output shall be 5V minimum.

4.6.14.4 Command airspeed. With an input signal of 10 mv ac (0° and 180°), the output shall be 5 ±1.5V.

4.6.15 Phase shift.

4.6.15.1 Safe speed. amplifier. The output voltage shall lead the input signal voltage by 90° ±15°. Tests shall be performed with a 10 mv signal voltage applied in phase with the reference excitation voltage and 180° away from this reference voltage.

4.6.15.2 Command mach. amplifier. The 400 Hz output voltage shall lead the 400-cps input signal voltage by 90° ±15°. Tests shall be performed with a 10-mv input signal voltage applied in phase with the reference excitation voltage and 180° away from this excitation voltage.

4.6.15.3 Aircraft mach. amplifier. The output voltage shall lead the input signal voltage by 90° ±15°. Tests shall be performed with a 12-mv signal voltage applied in phase with the reference excitation voltage and 180° away from this reference voltage. The signal shall be applied to the fine input terminals.

4.6.15.4 Indicated airspeed. amplifier. The output voltage shall lead the input signal voltage by 90° ±15°. Test shall be performed with a 12-mv signal voltage applied in phase with the reference excitation voltage and 180° away from this reference voltage. The signal shall be applied to the fine input terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.15.5 Command airspeed, amplifier. The 400 Hz output voltage shall lead the 400-cps input signal voltage by 90° ±15°. Tests shall be performed with a 10-mv input signal voltage applied in phase with the reference excitation voltage and 180° away from this excitation voltage.

4.6.15.6 Indicated airspeed, amplifier. The gain of the amplifier with the signal applied to the coarse input terminals and fine input terminals shall be as follows:

a. These tests shall be made for both polarities
b. Fine input - The output shall be 5 ±1-0.50V when 12 mv is applied to the fine input terminals
c. Coarse input - When the coarse input is 150 mv, the output shall not exceed 0.20V. When the coarse input is 1.0V, the output shall be 5V minimum.

4.6.16 Saturation.

4.6.16.1 Safe speed, amplifier. The output shall be not less than 13V when the input signal is 200 mv of either phase.

4.6.16.2 Command mach, amplifier. The output voltage shall be not less than 13V when the input signal is 200 mv rms of either phase.

4.6.16.3 Aircraft mach, amplifier. The output voltage shall be not less than 13V when the fine input is 200 mv of either phase.

4.6.16.4 Indicated airspeed, amplifier. The output voltage shall be not less than 13V when the fine input is 200 mv of either phase.

4.6.16.5 Command airspeed, amplifier. The output shall be not less than 13V when the fine input is 200 mv rms of either phase.

4.6.17 Power consumption. With the amplifier excited with an applied voltage of 115V 400 Hz and all loads connected, the power consumption shall be not greater than 98 va.

4.6.18 Functional test. The amplifier shall be excited and all channels shall be used to simultaneously cycle indicator functions at the rate of 1 cycle each two minutes for two hours. A cycle shall consist of the excursion from minimum value of the indicator function to maximum value and return to minimum value.

4.6.19 Low temperature operation, indicator. The indicator shall be subjected to a temperature of -54° ±2°C for a period of four hours with no electrical power applied. At the end of that period and after a three-minute warmup, while still at the specified temperature, the unit shall meet the tests specified in 4.6.6.1, 4.6.6.1.1, 4.6.6.2, 4.6.6.2.1, 4.6.6.3, 4.6.6.6, 4.6.6.7.1, 4.6.6.8, 4.6.6.8.1, 4.6.7, and 4.6.8, except that the permissible tolerance shall be increased by 75 percent.

4.6.20 Low temperature operation, amplifier. The amplifier shall be subjected to a temperature of -54° ±2°C for a period of four hours. After exposure with the temperature maintained at -54°C and following a three-minute warmup period, the unit shall meet the requirements of 4.6.12.1 and 4.6.13 through 4.6.17 except that the following tolerances shall apply:

Null: 1.5V maximum
Gain: AC 5 ±2V
Phase shift: 90° ±30° and 270° ±30°
Saturation: 13V minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.21 High temperature operation, indicator. The indicator shall be subjected to a temperature of +71° ±2°C for a period of four hours with no electrical power applied. At the end of this period and while still at the specified temperature, the unit shall meet the requirements of 4.6.6.1, 4.6.6.1.1, 4.6.6.2, 4.6.6.2.1, 4.6.6.3, 4.6.6.6, 4.6.6.7, 4.6.6.7.1, 4.6.7, and 4.6.8, except that the permissible tolerance shall be increased by 75 percent.

4.6.22 High temperature operation, amplifier. The amplifier shall be subjected to a temperature of +71° ±2°C for a period of four hours. The amplifier shall then meet the requirements of 4.6.12.1 and 4.6.13 through 4.6.17 except that the following tolerances shall apply:

Null: 1.5V maximum with a-c inputs shorted
Gain: AC 5 ±2V
Phase shift: 90° ±30° and 270° ±30°
Saturation: 13V minimum

4.6.23 Vibration error. While operating the indicator shall be subjected to a vibration test in accordance with Method 514.2, procedure I, part 1 (curve C), category b.1 equipment of MIL-STD-810, except as follows: Cycling time shall be the time of one sweep time. A range for curve c of 5 to 50 Hz and an acceleration level of + 1g from 23 to 50 Hz. Also, only the sinusoidal cycling portion will be required. Permissible tolerances during vibration shall not exceed the room temperature scale error tolerances specified in 4.6.6. Scale error shall be determined at not less than three test points for each servo.

4.6.24 Vibration. The unit shall be subjected to a vibration test in accordance with Method 514.2, procedure I, part 2, category b.1 equipment of MIL-STD-810, except as follows: A .4 inch double amplitude from 5 to 10 Hz and maximum of + 1g acceleration from 10 to 500 Hz, in lieu of Figure 514.2-2 and a given curve. Also, only the sinusoidal cycling portion will be required.

4.6.25 Frequency response test. Response test shall be performed for each servo system within the amplifier-indicator, Figure 11 depicts a typical circuit for obtaining the necessary data. The bandwidth and damping factor shall be determined by plotting the ratio of phase-out to phase-in versus frequency as specified on figure 12. For a servo less than critically damped, the damping ratio is related to response curve peak by the equation:

4.6.26 Magnetic effect. The magnetic effect of the unit shall be determined in terms of deflection of a free magnet approximately 1-0.50 inches long, suspended in a magnetic field with a horizontal intensity of 0.18 ±0.01 oersted. It shall not cause the free magnet to deflect more than 5° when the nit is held in various positions on an east-west line with its nearest part 12 inches from the center of the magnet. Tests shall be made with power applied to the unit.

4.6.27 Vibration failure indicator. The indicator shall be subjected to a vibration test in accordance with Method 513.2, procedure I, part 1 (curve c), category b.1 equipment of MIL-STD-810. The frequency of vibration shall be varied uniformly at a sweep time of one hour. Curve c shall be modified as follows: "A range for curve c of 5 to 50 Hz and an acceleration level of + 1 g from 23° to 50 Hz."

4.6.28 Acceleration indicator. The indicator shall be subjected to a acceleration test in accordance with Method 513.2, procedure II of MIL-STD-810. The forward acceleration (A) level shall be 1.5g and produced by means of a centrifuge facility.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.29 Acceleration, amplifier. The unit shall be subjected to a acceleration test in accordance with Method 513.2, procedure II of MIL-STD-810. The forward acceleration level (A) shall be 2g and produced by means of a centrifuge facility. During the test, the amplifier shall meet the requirements of 4.6.12.1 and 4.6.13 through 4.6.17.

4.6.30 Humidity, indicator. The indicator or a suitable hermetically sealed mockup shall be subjected to a humidity test in accordance with Method 507.1, procedure I of MIL-STD-810 with relative humidity up to 100 percent.

4.6.31 Humidity, amplifier. The amplifier shall be subjected to the test specified in Method 509.1, procedure I of MIL-STD-810. At the completion of the test, each amplifier shall meet the requirements of 4.6.12.1 and 4.6.13 through 4.6.17.

4.6.32 Fungus resistance, indicator. The indicator, or a suitable hermetically sealed mockup that exactly duplicates the external portion of the unit, shall be subjected to fungus growth as encountered in a tropical climate in a mold chamber maintaining an internal temperature of 30°C and a relative humidity of 95 percent for a period of 28 days. At the end of this test, the parts shall be visibly examined. Deterioration or corrosion of any internal components which could in any manner prevent the indicator meeting operational requirements during service life shall be considered failure.

4.6.33 Fungus resistance, amplifier. The amplifier shall be subjected to the fungus resistance tests as specified in Method 507.1, procedure I of MIL-STD-810. At the completion of the tests, the amplifier shall not suffer deterioration which could in any manner prevent the equipment from meeting operational requirements of 4.6.12.1 and 4.6.13 through 4.6.17.

4.6.34 Salt fog, indicator. The indicator or a suitable hermetically sealed mockup that exactly duplicates the external portion of the indicator shall be subjected to a salt fog test in accordance with Method 509.1, procedure I of MIL-STD-810.

4.6.35 Salt fog, amplifier. The amplifier shall be subjected to the salt fog in accordance with Method 509.1, procedure I of MIL-STD-810. At the completion of the test, the unit shall meet the requirements of 4.6.12.1 and 4.6.13 through 4.6.17.

4.6.36 Altitude. The indicator shall be subjected to a pressure of 2,118 inches Hg. At this pressure, all functions of the indicator shall be capable of operating through full scale. After being returned to sea level pressure, the indicator shall be capable of meeting the requirements of 4.5.1.

4.6.37 Extreme temperature exposure. After alternate exposures to temperatures of -54° and +71°C for periods of 24 hours each and a delay of three hours at room temperature following completion of this exposure, the amplifier shall meet the requirements of 4.6.12.1 and 4.6.13 through 4.6.17.

4.6.38 Temperature-altitude tests. The temperature-altitude tests shall be conducted in accordance with the conditions of FIGURE 5. At any combination of temperature-altitude specified on curves A, B, and C, the amplifier shall meet the requirements of 4.6.11, 4.6.12.1 and 4.6.13 through 4.6.17 except that the following tolerances shall apply:

Null: 1.5V maximum with a-c input shorted
Gain: AC 5 ±2V
Phase shift: 90° ±30° and 270° ±30°
Saturation: 13V minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.39 Shock. The amplifier shall be subject to the tests as specified in Method 516.2, procedure I and III of MIL-STD-810. Shock pulse shape shall be in accordance with FIGURE 516.2-2 (amplitude and a and time duration c) for both procedures. The amplifier shall be operated during procedure I.

4.6.40 Electromagnetic interference. The amplifier-indicator shall be tested in accordance with MIL-STD-462, to demonstrate compliance with the requirements of paragraph 3.6.2.

4.6.41 Magnetic effect. The amplifier shall be magnetically shielded. When held in any position so that the nearest portion of the amplifier is a distance of 12 inches from the pivot of the card of an aircraft magnetic compass in a horizontal magnetic field having a strength of 0.18 oersted, the amplifier shall not cause a change in reading of the compass card to exceed 5°.

4.6.42.1 First article. The two systems specified in 4.5.2.4 shall be subjected to a reproduction reliability test in accordance with MIL-STD-781, test plan I, except as modified herein, which shall demonstrate a contractual MTBF of 600 hours. Each of the two indicators and amplifiers shall be tested in a minimum of 1,320 hours of actual electrical operation. The cycling time of five to six minutes per cycle for each indicator function display, with a minimum of 13,200 cycles per function, shall include monitor test, self test, and operation of all slew switches. A cycle shall consist of the excursion from the function minimum value to maximum and return to minimum. The test shall begin when rated power is applied to the system. After four hours of rated power on, the power shall be turned off for a period of two hours. This procedure of rated power-on, power-off shall be repeated until the test is completed. Only the power-on portion of the test shall be used in calculating the total test time required by test plan I. The system shall be tested at room temperature for approximately 64 percent of the test time, at -10°C for approximately 14 percent of the test time, and at + to 50°C for approximately 22 percent of the test time shown in table VI. During the fifth cycle, the system shall be vibrated in accordance with paragraph 4.6.23 of this specification except as follows: 'The indicator shall be vibrated at a frequency of 35 Hz and a double amplitude of 0.036 inch in lieu of curve C.' The transition from the fourth to the fifth cycling period shall be completed in the shortest possible time to allow the vibration test to be conducted during a temperature change from -10° + 25°C. After each cycling period of electrical operating shown in table VI, the system shall be subjected to a scale error test of at least three stations per function. Any malfunction, including failure to meet the scale error test, shall be recorded, the test interrupted while repairs are made, and the test then continued from the point of interruption. Upon completion of the reliability test, the system shall again be tested for scale error with a 50 percent increase in tolerances. Failure to meet the increased-tolerance scale error test shall be considered malfunction. This test may be interrupted for normal weekend shutdown. If a reject decision is reached in accordance with test plan I of MIL-STD-781, or 13 or more failures occur in 3,660 hours of testing, delivery of production units shall be stopped and within ten days the proposed corrective action shall be submitted to the contracting activity for approval. The equipment under test shall be modified to the approved configuration and the test rerun or continued until an accept or reject decision in accordance with test plan I (except as modified herein) is reached. At the conclusion of the redemonstration test, all equipment produced to date and all equipment subsequently produced shall be modified to the approved configuration (see 6.2). In the event a continue-test decision is reached at the end of 3,600 hours of testing, the test shall be continued until an accept or reject decision in accordance with test plan I (except as modified herein) is reached. If two or less failures occur in 3,600 hours of testing, the test samples and the first production quantity of 150 systems shall be accepted. Between 3,600 and 6,060 hours of testing, the equipment shall be accepted if the accept conditions of test plan I are met, or 6,060 hours of testing with 12 failures will constitute acceptance; 13 failures will constitute rejection. Failure to reach an accept decision in accordance with the criteria specified shall stop all deliveries until an accept decision is reached. Pattern failures, as defined in MIL-STD-781, shall require corrective action for all equipment produced to date and produced subsequently regardless of an accept or reject decision. Reporting shall be in accordance with MIL-STD-781.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.42.2 Production. The four systems specified in 4.5.2.5 shall be subjected to a production reliability test in accordance with MIL-STD-781, test plan I, except as modified herein, which shall demonstrate a contractual MTBF of 600 hours. Each of the four indicators and amplifiers shall be tested a minimum of 900 hours of actual electrical operation. The cycling time of five to six minutes per cycle for each indicator function display, with a minimum of 13,200 cycles per function, shall include monitor test, self test, and operation of all slew switches. A cycle shall consist of the excursion from the function minimum value to maximum and return to minimum. The test shall begin when rated power is applied to the system. After four hours of rated power on, the power shall be turned off for a period of two hours. This procedure of power-one, power-off shall be repeated until the test is completed. Only the power-on portion of the test shall be used in calculating the total test time required by test plan I. The system shall be tested at room temperature for approximately 64 percent of the test time, at -10°C for approximately 14 percent of the test time, and at + 50°C for approximately 22 percent of the test time shown in table VI. During the fifth cycle, the indicator shall be vibrated in accordance with Method 514.2, procedure 1, part 1 (curve c), category b.1 equipment of MIL-STD-810, except as follows: Cycling time shall be the time of one sweep time. A range for curve c of 5 to 50 Hz and an acceleration level of + 1g from 23 to 50 Hz. Also, only the sinusoidal cycling portion will be required. The transition from the fourth to the fifth cycling period shall be completed in the shortest possible time to allow the vibration test to be conducted during the temperature change from -10°C to + 25°C. After each cycle period of electrical operation shown in table VI, the system shall be subjected to a scale error test of at least three stations per function. Any malfunction, including failure to meet the scale error test, shall be recorded, the test interrupted while repairs are made, and the test then continued from the point of interruption. Upon completion of the reliability test, the system shall again be tested for scale error with a 50 percent increase in tolerances. Failure to meet the increased-tolerances scale error test shall be considered a malfunction. This test may be interrupted for normal weekend shutdown. If a reject decision is reached in accordance with test plan I of MIL-STD-781, or 13 or more failures occur in 3,660 hours of testing, delivery of production units shall be stopped and within ten days the proposed corrective action shall be submitted to the contracting activity for approval. The equipment under test shall be modified to the approved configuration and the test rerun or continued until an accept or reject decision in accordance with test plan I (except as modified herein) is reached. At the conclusion of the redemonstration test, all equipment produced in the particular production quantity and all equipment subsequently produced shall be modified to the approved configuration (see 6.2). In the event a continue-test decision is reached at the end of 3,600 hours of testing, the test shall be continued until an accept or reject decision is reached in accordance with test plan I (except as modified herein). If two or less failures occur in 3,600 hours of testing, the particular production quantity of 150 systems shall be accepted. Failure to reach an acceptance decision in accordance with the criteria specified shall stop deliveries of production equipment until an accept decision is reached. Pattern failures as defined in MIL-STD-781 shall require corrective action to all equipment produced in the particular production quantity and all equipment subsequently produced regardless of an accept or reject decision. This test shall be repeated for each 10 units or fraction thereof produced. Reporting shall be in accordance with MIL-STD-781.

4.6.43 Dust (fine sand). The unit shall be subjected to a dust (fine sand) test in accordance with Method 510.1, procedure I of MIL-STD-810. At the completion of this test, the unit shall operate satisfactorily.

4.6.44 Decompression test. The indicator shall be placed in a cabinet in which the pressure is maintained the same as inside the hermetically sealed case. The pressure within the cabinet shall be released in such a manner that a pressure differential of 16 inches Hg is instantaneously applied between the interior an exterior of the case. Operation of the indicator shall not be affected by the sudden decrease in pressure.

4.6.45 External pressure. The indicator shall be subjected to a pressurization test by applying an absolute pressure of 56 inches Hg (approximately 26 inches Hg above atmospheric pressure) for a period of 15 minutes with rated power on the indicator. Normal subsequent operation shall not be affected by this test and no failure of the cover glass, hermetic seal, or case shall occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

4.6.46 Compatibility and signal interchangeability tests. Compatibility and signal interchangeability tests (see 6.2), as required to demonstrate compliance with 3.5.6 shall be conducted in accordance with the applicable document for the equipment specified herein.

4.6.47 Maintainability demonstration. Maintainability demonstration shall be in accordance with MIL-STD-471, appendix B, method 2.

4.7 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements, Section 4 of MIL-P-116. The sampling and inspection of the packing for shipment and storage shall be in accordance with the quality assurance provisions of applicable container specification shown in Section 5. The inspection of marking for shipment and storage shall be in accordance with MIL-STD-129. The inspection of commercial packaging shall be as specified in the contract (see 6.2).

5. PACKAGING

5.1 Preservation. Preservation shall be level "A" or "C" as specified (see 6.2).

5.1.1 Preservation-packaging. Unless otherwise specified by the contracting activity, item shall be packaged in quantity unit pack (QUP) of one each. Each item will be provided a preservation method IA-8 in accordance with (IAW) MIL-P-116.

5.1.2 Cleaning. Item shall be cleaned IAW MIL-P-116 C-1 process.

5.1.3 Drying. Immediately after cleaning, the item shall be dried following any one or combination of the drying procedures listed in MIL-P-116. The drying procedures employed shall not be injurious to the item.

5.1.4 Level A. Item shall be preserved IAW MIL-P-116 and MIL-STD-2073-1 to provide a method IA-8.

5.1.5 Level C. Item shall be individually preserved in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity as specified in MIL-P-116 and MIL-STD-2073-1.

5.2 Packing. Packing shall be level "A". "B", or "C", as specified (see 6.2).

5.2.1 Container-cushioning. Unit container requirements shall conform to established procedures, as specified in 654 ABG/LGTPL Special Packaging Instructions (SPI) 00-0056-7151, unless otherwise specified by the contracting activity. Unit container shall be large enough to allow for application of sufficient cushioning/wrap material, between the item and unit container. Item cushioning/wrap material shall be of sufficient density and thickness to protect the unit container from punctures. Intermediate container requirements shall conform to 654 AFB/LGTPL SPI 00-056-7151 unless otherwise specified by the contracting activity. Cushioning material requirements shall comply with 654 ABG/LGTPL SPI 00-056-7151.

5.2.2 Level A. Fiberboard containers do not meet Level "A" container criteria.

5.2.3 Level B. Item will be preserved as specified in 5.1 and shall be packed in exterior containers as specified in 654 ABG/LGTPL SPI 00-056-7151 unless otherwise specified by the contracting activity. Closure shall be in accordance with appropriate PPP-B-636 procedures, as specified by 654 ABG/LGTPL SPI 00-056-7151, and contracting activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

5.2.4. Level C. Item will be packed in such a manner that will afford adequate protection against physical damage during direct domestic shipment from the supply source to the first receiving activity. These packs shall conform to MIL-STD-2073-1.

5.3 Marking. Unit, intermediate, and exterior containers shall be marked IAW special markings required by the contracting activity, 654 ABG/LGTPL 00-056-7151 SPI, and MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The A/A24G-10 amplifier-indicator group covered herein is intended for use within the cockpit of a high performance weapon system.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1)
c. When guide pins are required (see figure 3)
d. When Government loaned equipment will be available for loan to the contractor (see 3.22)
e. When sampling plan B tests will not be conducted
f. Procedure for conducting compatibility and signal interchangeability tests (see 4.6.46)
g. Levels of packaging and packing required (see section 5)
h. When sampling plans C and D, tests will not be performed (see 4.5.2.4 and 4.5.2.5)
i. That systems modified to an approved configuration will be at no additional contract cost (see 4.6.42.1 and 4.6.42.2)
j. When first article is required (see 3.1).

6.3 First article. When the first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article, a first article sample, a first production item, a sample selected from the first production items, or a standard production item from the contractor's current inventory (see 3); and the number of items to be tested as specified in 4.2.

6.4 Subject term (key word) listing.

Amplifier - indicator
Indicator Group
Transmitter
Synchro

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

TABLE I.

Mach Section.

Aircraft Mach	Transmitter Coarse°	Angle Fine°
0.2	0	0
0.4	40	200
0.6	80	40
0.8	120	240
1.0	160	80

TABLE II.

Indicated Airspeed.

IAS Knots	Transmitter Coarse°	Angle Fine°
80	353.33	326.67
100	0	0
200	33.3	166.67
300	66.7	333.33
400	100	140
500	133.3	306.67
600	166.7	113.33

TABLE III.

Slew Speed.

Function	Maximum Time In Seconds
1. Aircraft mach tape (0.2 TO 1.0)	7
2. Command mach, manual mode (with maximum switch displacement (0.2 to 1.0)) (room test only)	9
3. Indicates airspeed (50 to 600)	12
4. Command indicator airspeed manual mode (with maximum switch displacement (50 to 600))	12
5. Safe speed (angle of attack (-10 to +25))	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

TABLE IV. Pin connection table for mach-airspeed indicator indicator-amplifier interconnections

Connector: PT02A-20-41PW PT06A-20-41SW	Connector: PT1H-20-41PW PT06A-20-41SW	Function	Section
Pin-Amplifier	To Indicator		
W	W	Power ground	
A	A	Spare	
B	B	Spare	
V	V	Spare	
j	j	Spare	
X	X	Spare	
Y	Y	Spare	
C	C	R G out	
U	U	CT H R G out	
i	i	R G & Motor exc	SAFE SPEED
k	k	Amp out	
Z	Z	Capacitor	
D	D	5X CT H R G out	
T	T	Amp out	
s	s	Capacitor	I. A. S.
m	m	1X CT H	
E	E	R G exc	
S	S	Motor fix Ø	
h	h	Amp out	
t	t	Capacitor	
a	a	R G exc	COMM
F	F	Slew switch out	A. S.
r	r	Motor Fix Ø	
n	n	Amp Out	
R	R	Capacitor	
g	g	Motor fixed Ø	COMM.
b	b	Rate gen exc	MACH
G	G	Signal ground	
q	q	Slew switch out	
p	p	Spare	
P	P	Spare	
f	f	Spare	
c	c	1X CT H	
H	H	5X CT H R G out	
N	N	Spare	
e	e	Spare	
d	d	Amp out	MACH
J	J	Capacitor	
M	M	Motor fix Ø	
L	L	R G exc	
K	K	Chassis Ground	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

TABLE IV. Pin connection table for mach-airspeed indicator indicator-amplifier interconnections - Continued.

Connector PT1H-18-32P PT06A-18-32S Pin-Indicator	Function	Section
T	CT X	MACH MONITOR
A	CT Y	
S	CT Z	
U	CT X	SAFE SPEED
B	CT Y	
R	CT Z	
e	CT X	COARSE MACH
K	CT Y	
V	CT Z	
C	CT X	FINE MACH
P	CT Y	
d	CT Z	
f	CT X	COARSE IAS
W	CT Y	
D	CT Z	
N	CT X	FINE IAS
c	CT Y	
j	CT Z	
g	Spare	
X	CADC	IAS MONITOR SIGNAL (28V DC)
E	CADC	MACH MONITOR SIGNAL (28V DC)
M	Spare	
b	Spare	
h	Spare	
Y	Lights	
F	Lights	
L	CT X	IAS MONITOR
a	CT Y	
Z	CT Z	
G	Self-test	(NORMALLY GROUNDED-CONNECT TO 28V DC FOR SELF-TEST)
J	Flag trip level voltage	IAS MONITOR
H	Flag trip level voltage	MACH MONITOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

TABLE IV. Pin connection table for mach-airspeed indicator indicator-amplifier interconnections - Continued.

Connector PT02A-12-10PW PT06A-12-10SW Pin Amplifier	Function
H	115V 400 cycles (H) from AC bus (/0° ref)
A	AC Common Cold (C)
B	Spare
G	Spare
K	Spare
J	Spare
C	18 ± 2 - To Angle of Attack Sensor
F	Spare
E	Spare
D	Spare

TABLE V. Electrical zero.

Function	Indicator Reading With Transmitter Set at E.Z.	Standard Test Transmitter Pin Connections				
		H	C	X	Y	Z
Mach (fine synchro)	0.2 mach	26V 400 4°	AC cold w/41 PW	C/32P	P/32P	a/32P
IAS (fine synchro)	100 knots	26V 400 4°	AC cold w/41 PW	N/32P	c/32P	j/32P
Angle of attack	Midpoint of stall warning band	26V 400 4°	AC cold w/41 PW	U/32P	B/32P	R/32P

NOTE: The 4° phase angle shown for the 26V 400 ~ supply is to indicate that it is of the same phase as the 115V 400 ~ 4° supply (see table IV).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

TABLE VI

Reliability Test Table

Cycling Period	Number of Hours	Ambient Temp (°C)
1	50	25
2	50	50
3	100	25
4	50	10
5	50	25
6	50	50
7	100	25
8	50	10
9	100	25
10	50	50
11	50	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

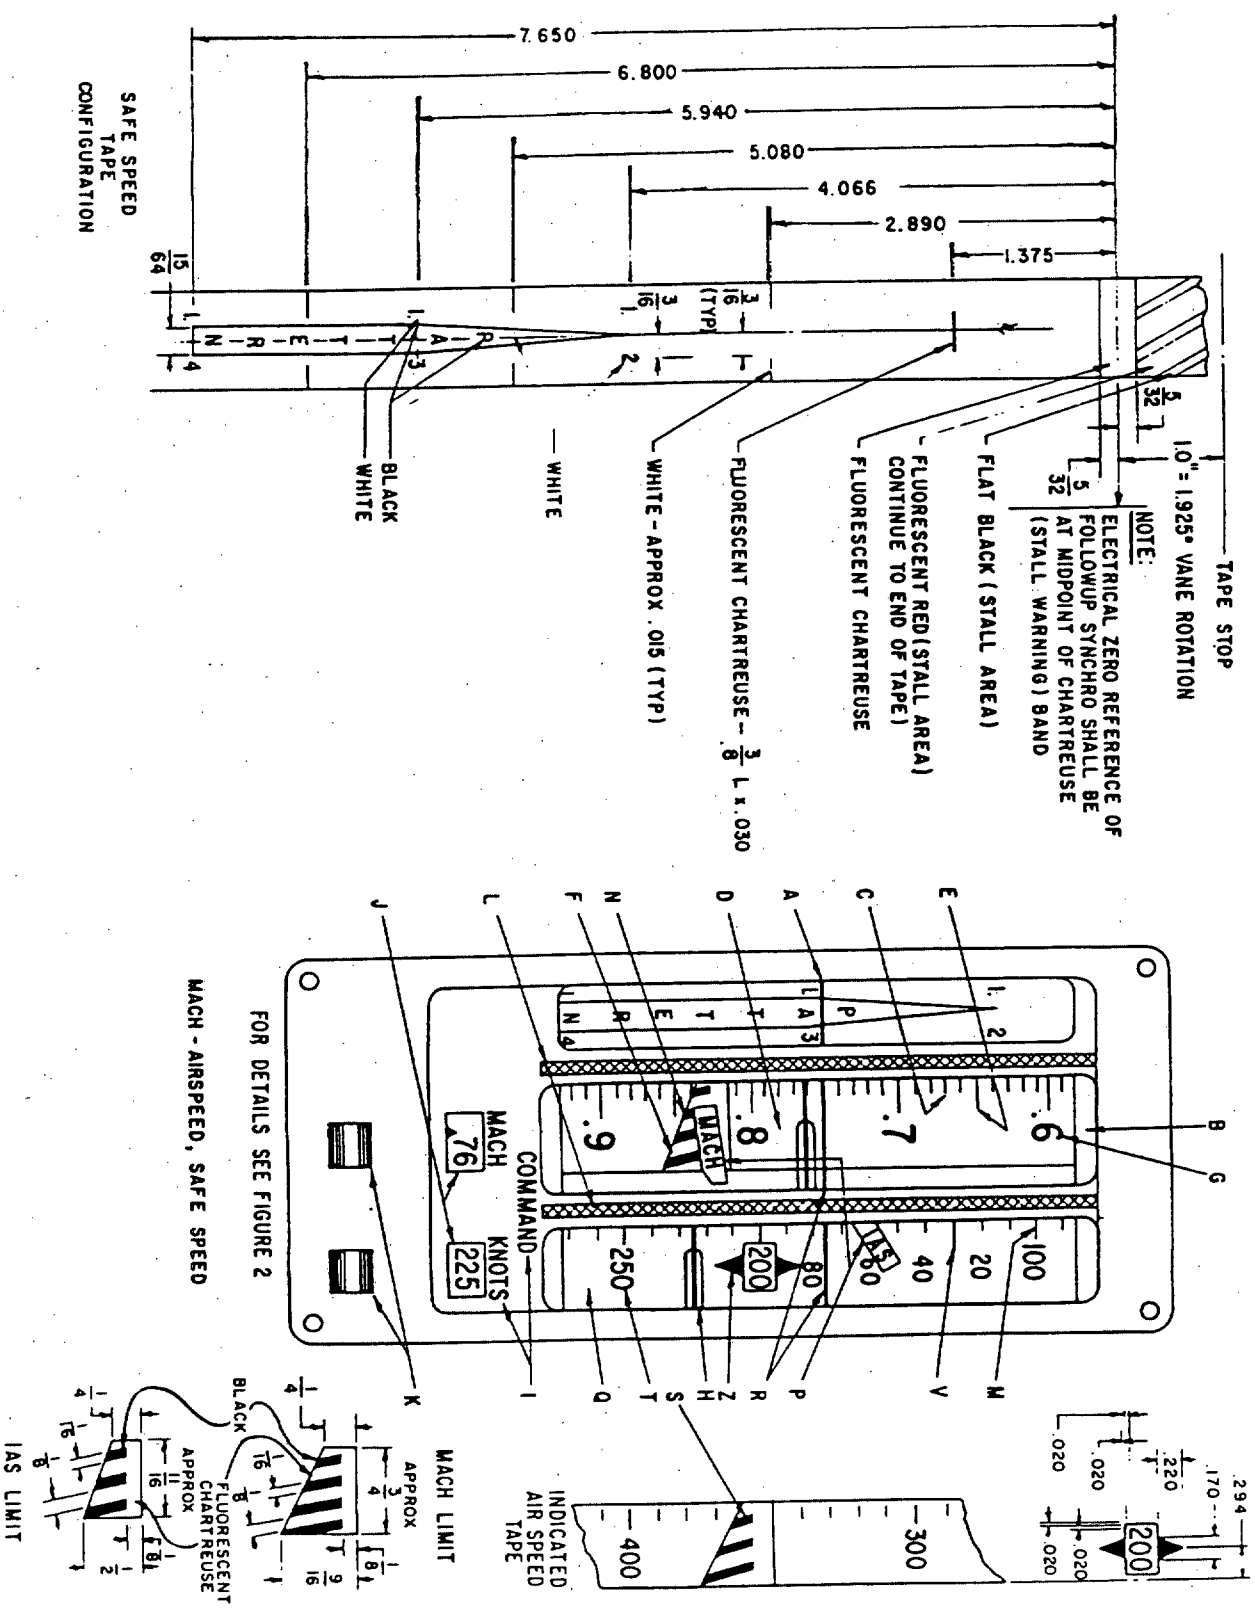


FIGURE 1. Presentation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

A 0.030
B Black
C 3/16 White
D Black tape
E 5/16 White
F Black
G 5/16 White numerals
H White command marker with 0.030 black centerline total width 1/8
This marker shall be located below the fixed read reference line
I 1/8 White lettering to be illuminated by instrument lighting
J 1/4 White numerals
K Spring centered switch gray
L Gray
M 3/16 White
N Chartreuse fluorescent
P Red 3/16 x 9/16 black letters 1/8 high; location optional within 3/4 lubber line
Q Black tape
R 0.030 White fixed read reference
S IAS limit indication: Chartreuse and black diagonal lines
T 7/32 White numerals
V 1/8 White
Y Mach limit indication: Chartreuse and black diagonal line
Z White

Letters and numerals shall conform to MS33558. Stroke width numerals and grads 1/16 to 1/8 of height; width of numerals to be 3/5 of height.

All colors to conform to FED-STD-595.

Black, color No. 37038, White, color No. 37875, Gray, color No. 36231


Red - Red Fluorescent 116-1548 (Switzer Brothers, Cleveland, Ohio or equal)

Chartreuse - Chartreuse Fluorescent (Switzer Brothers Saturn Yellow, or equal)

DIMENSIONS IN INCHES

FIGURE 2. Dial and case details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

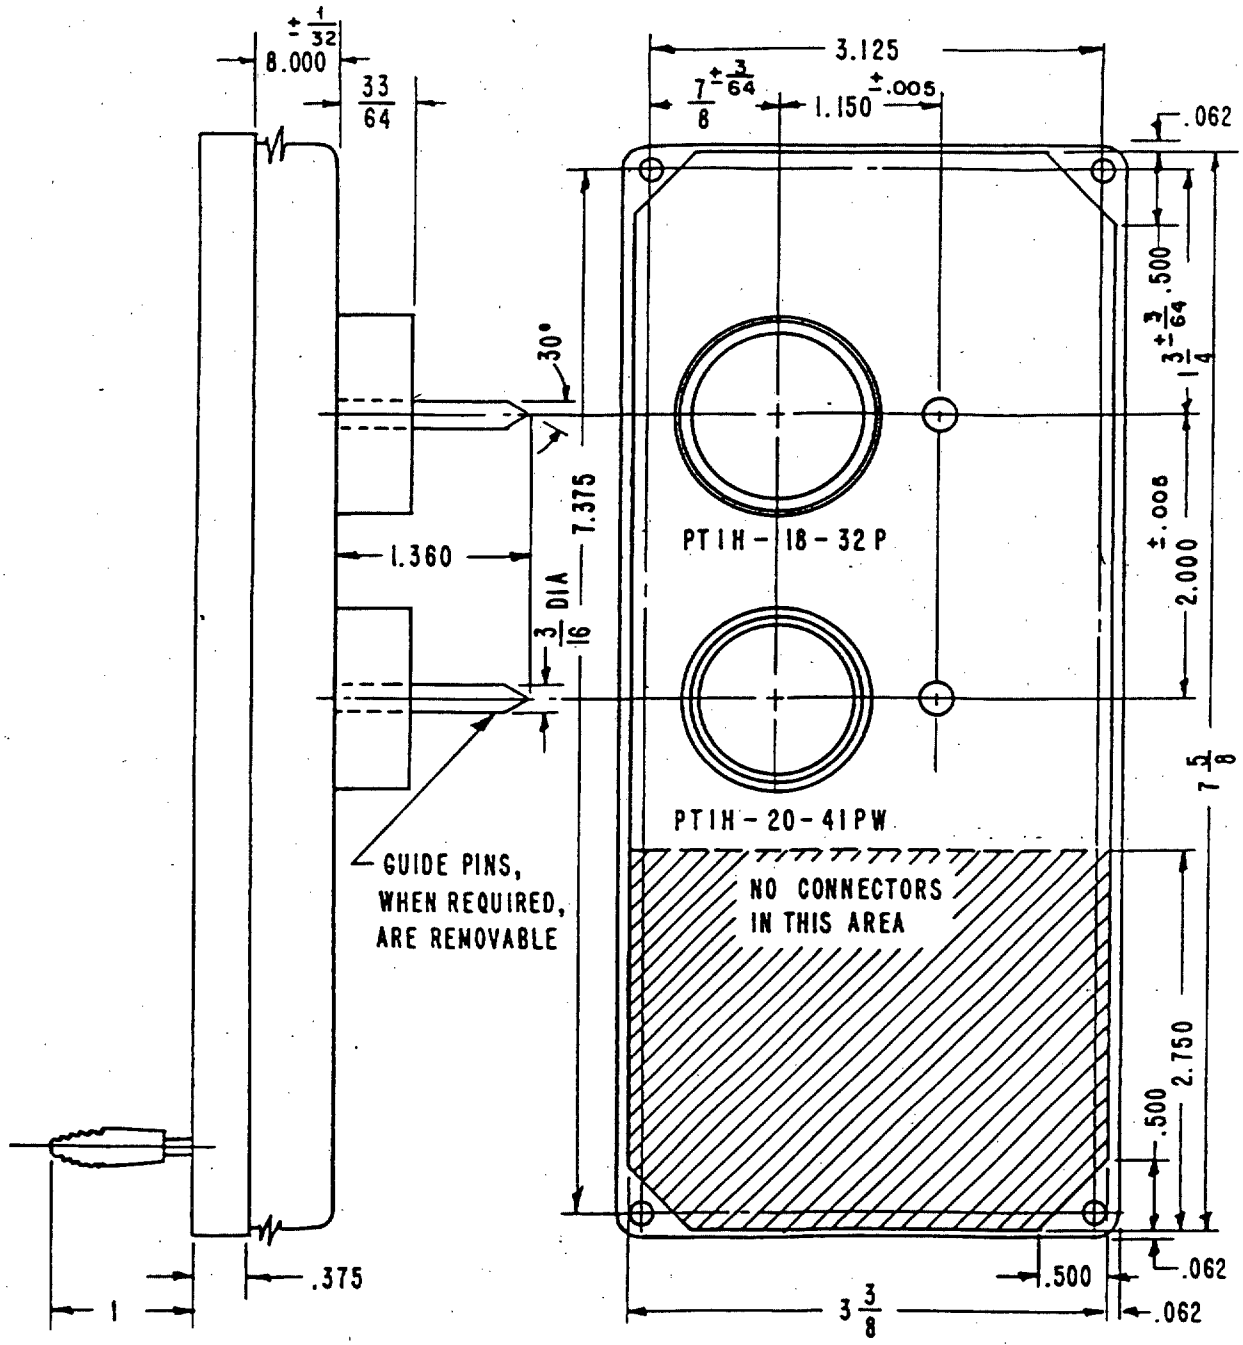

DIMENSIONS IN INCHES
TOLERANCES
FRACTIONS ±1/32
DECIMALS ±.010

FIGURE 3. Case, mach-airspeed rear & side view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

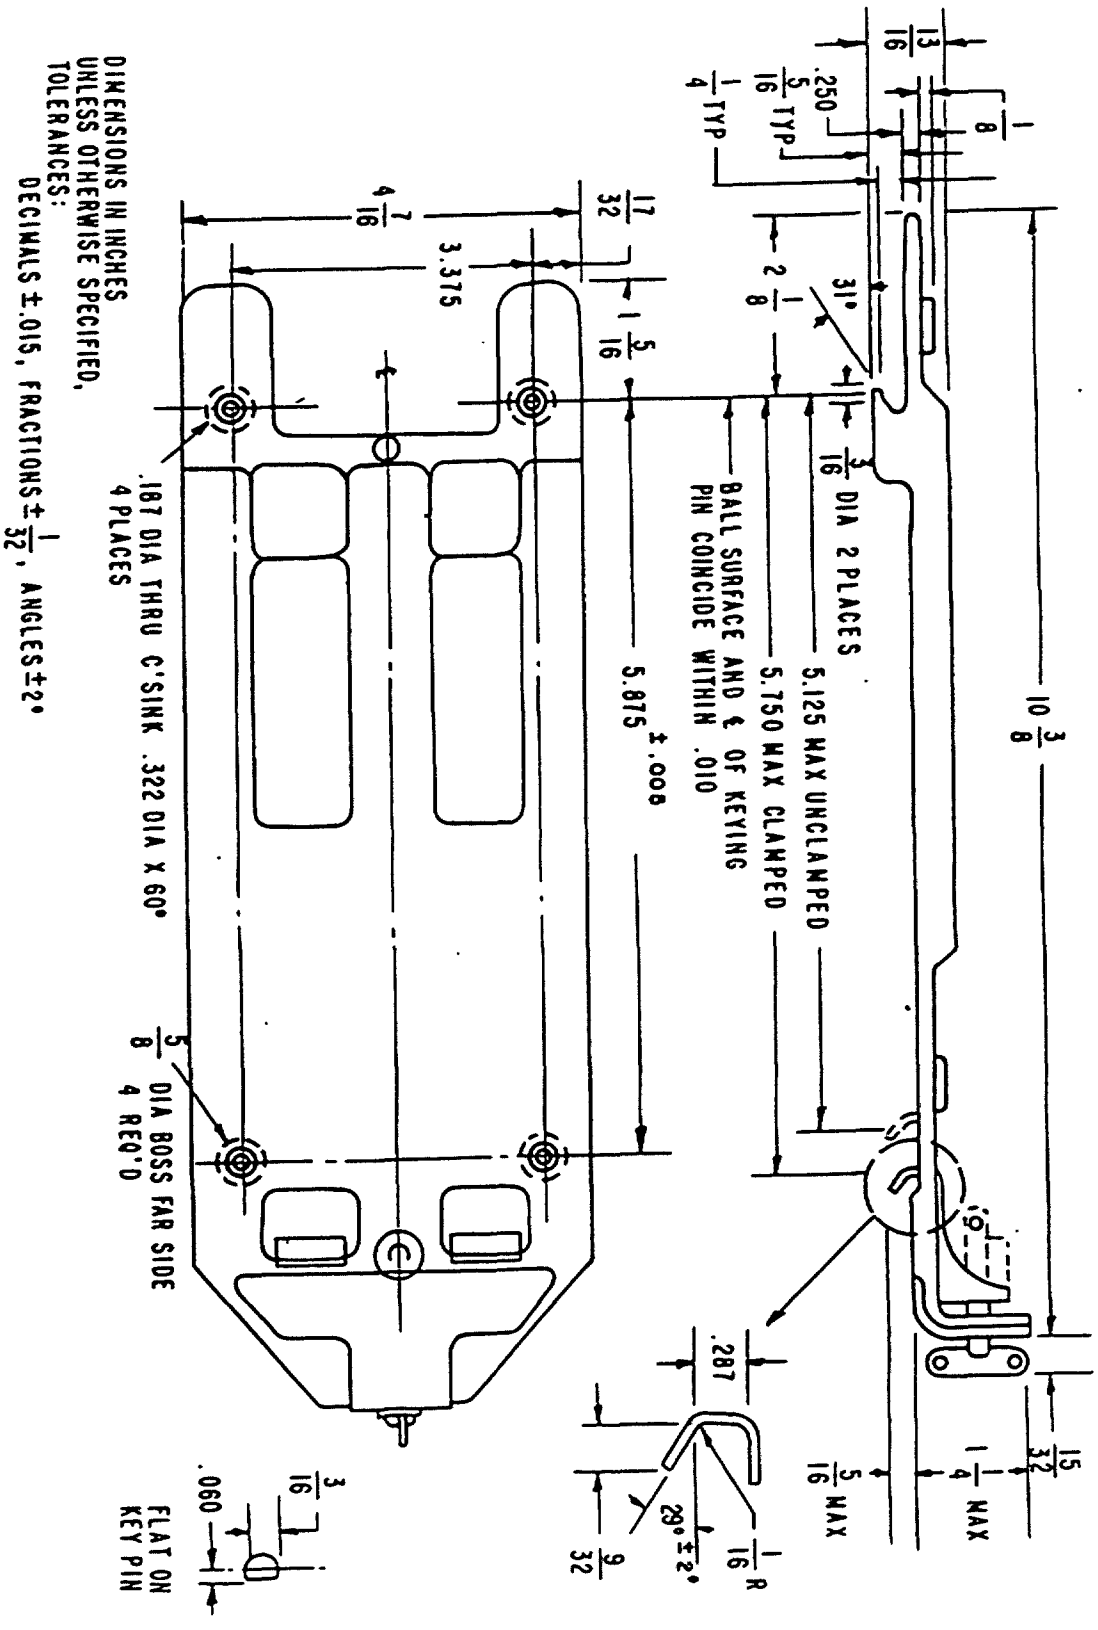


FIGURE 4. Mounting base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

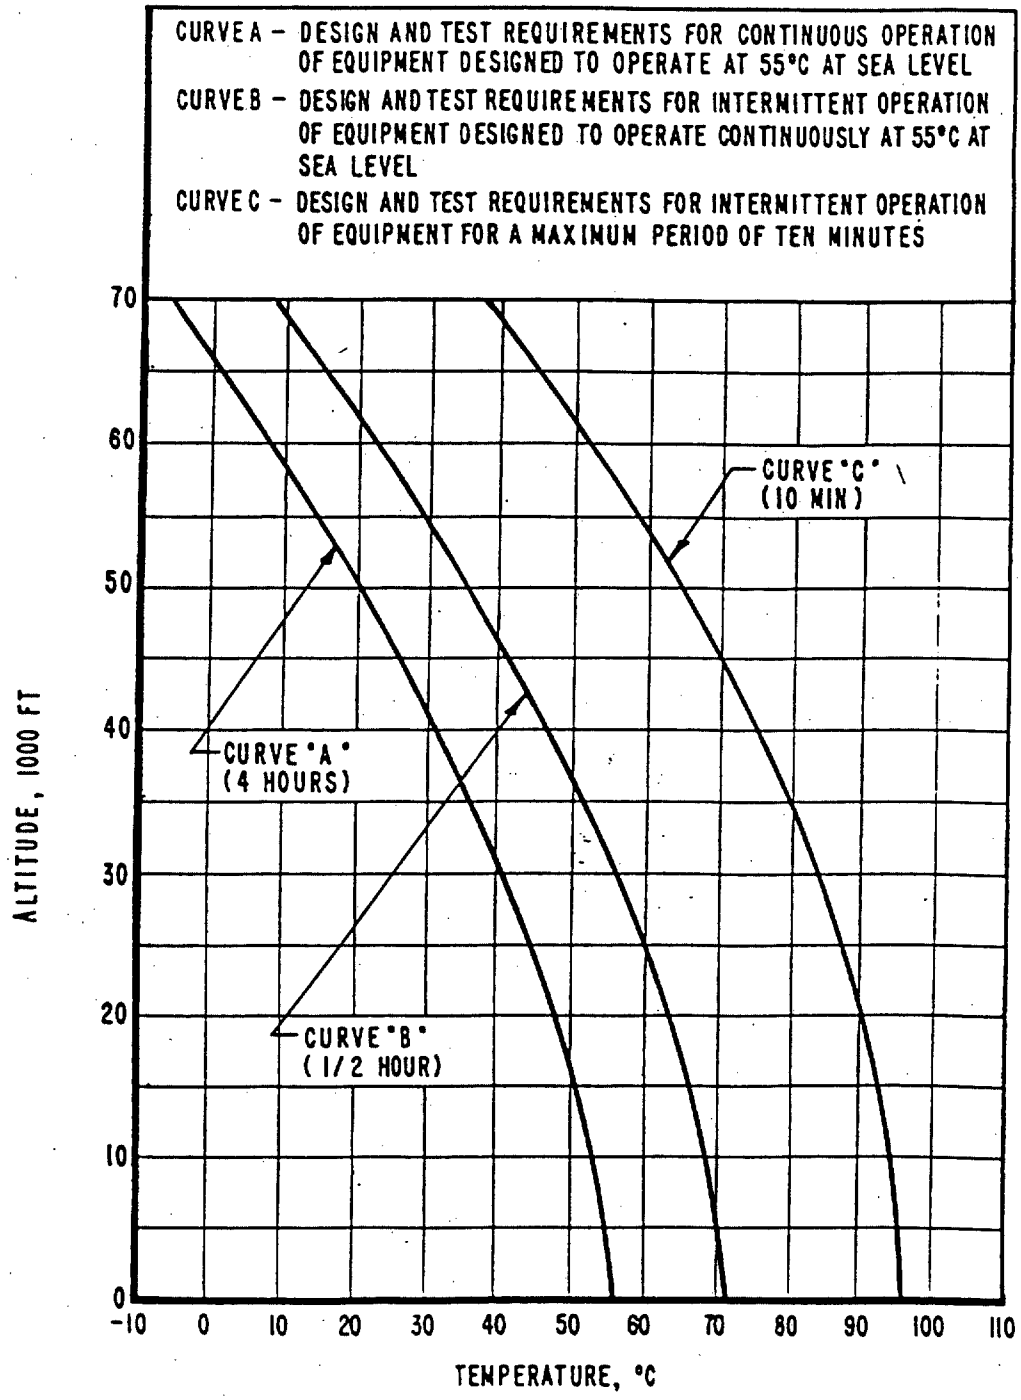


FIGURE 5. Curves for altitude vs temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

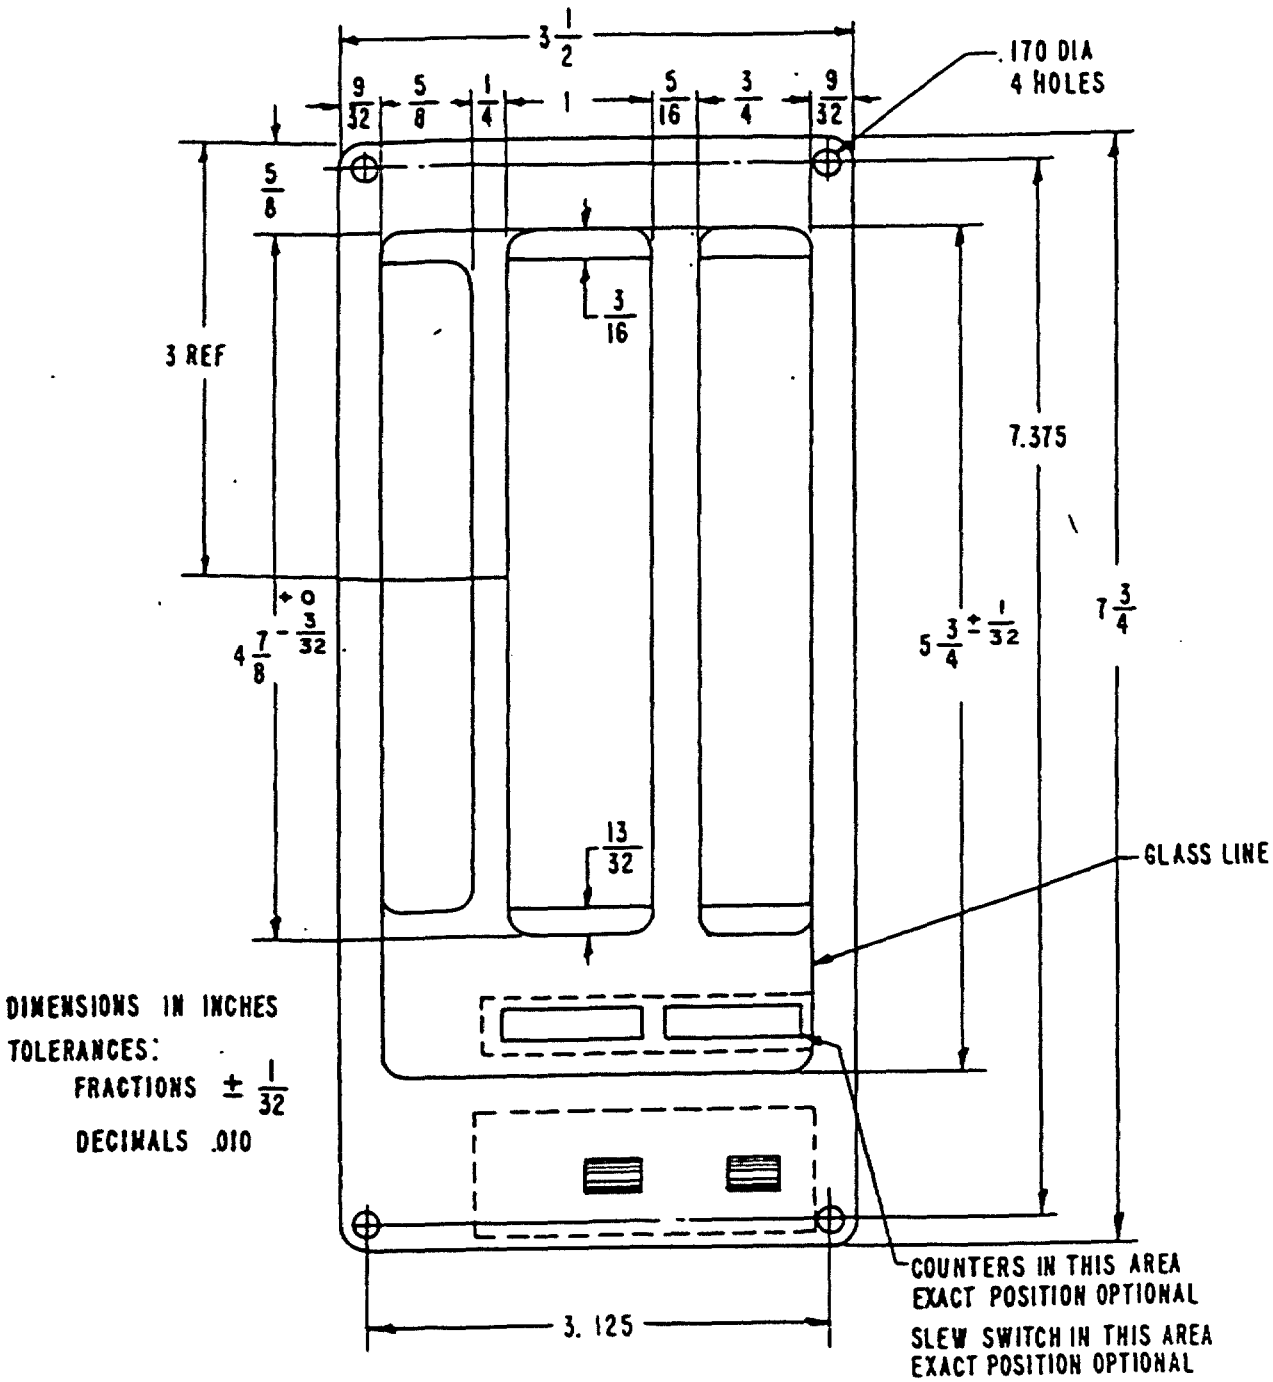


FIGURE 6 Bezel, mach-airspeed-safe speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

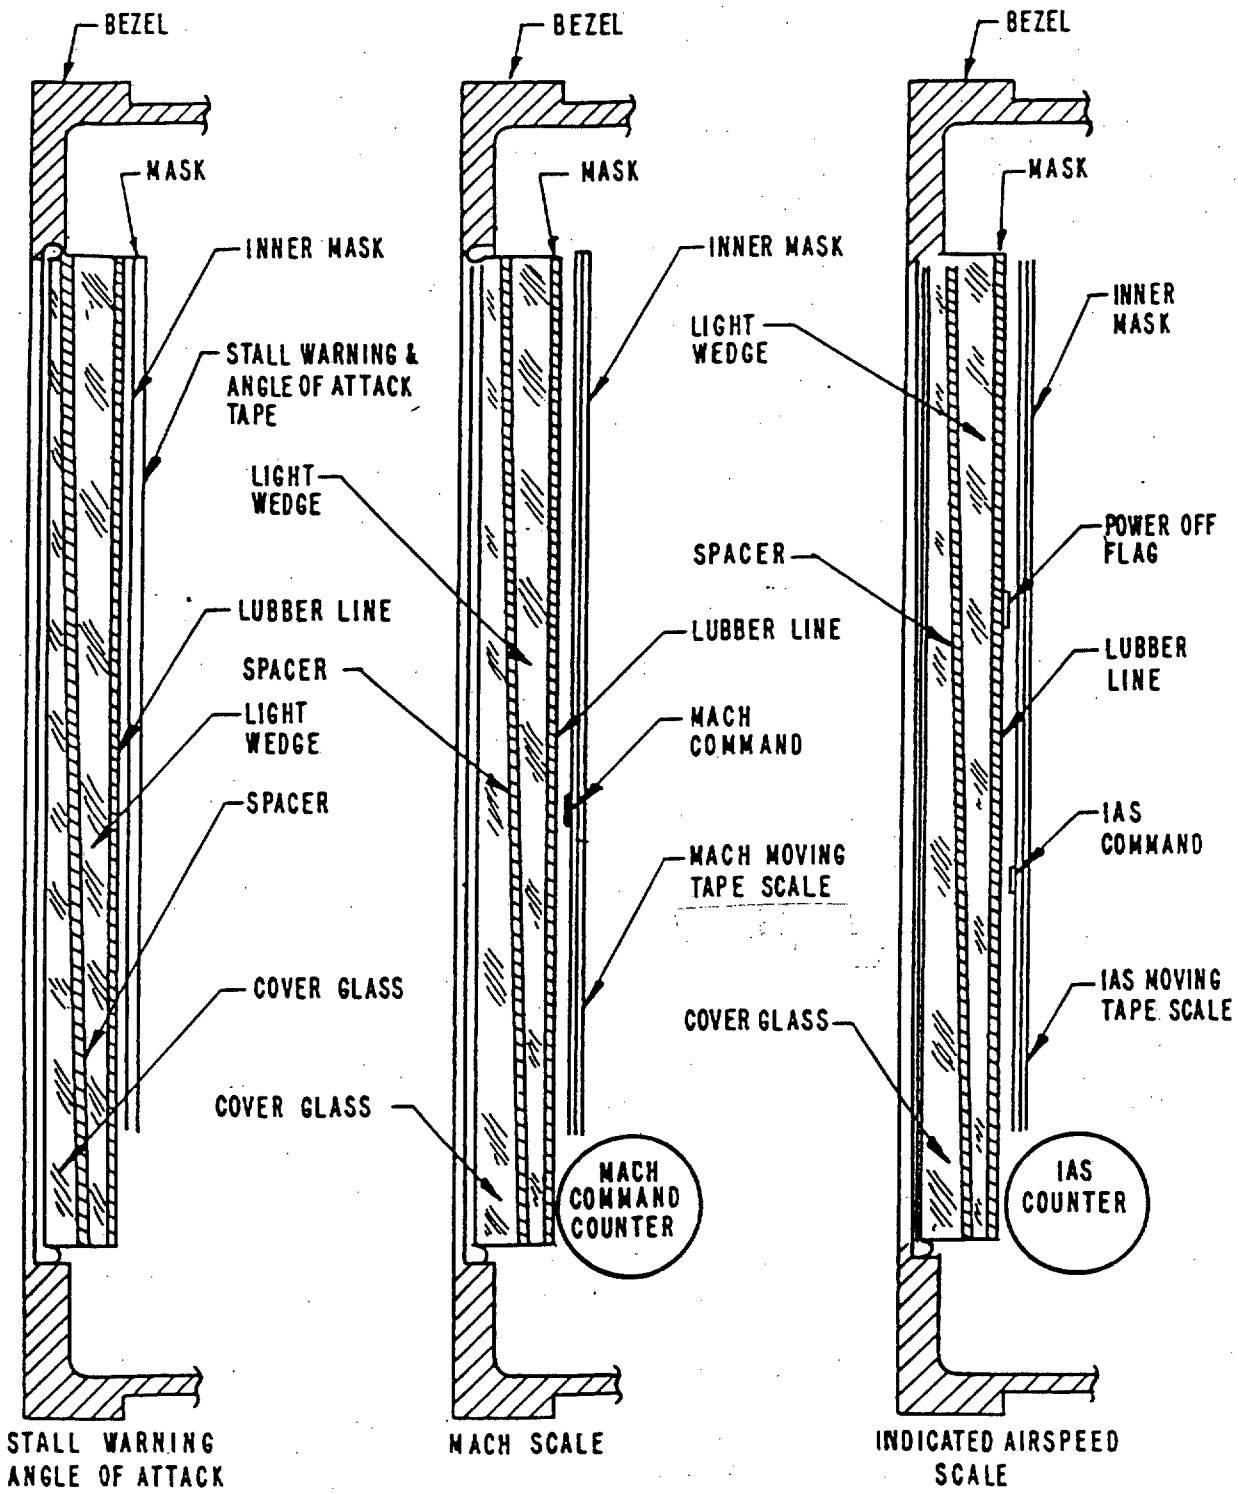


FIGURE 7. Sections, mach-airspeed safe speed

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

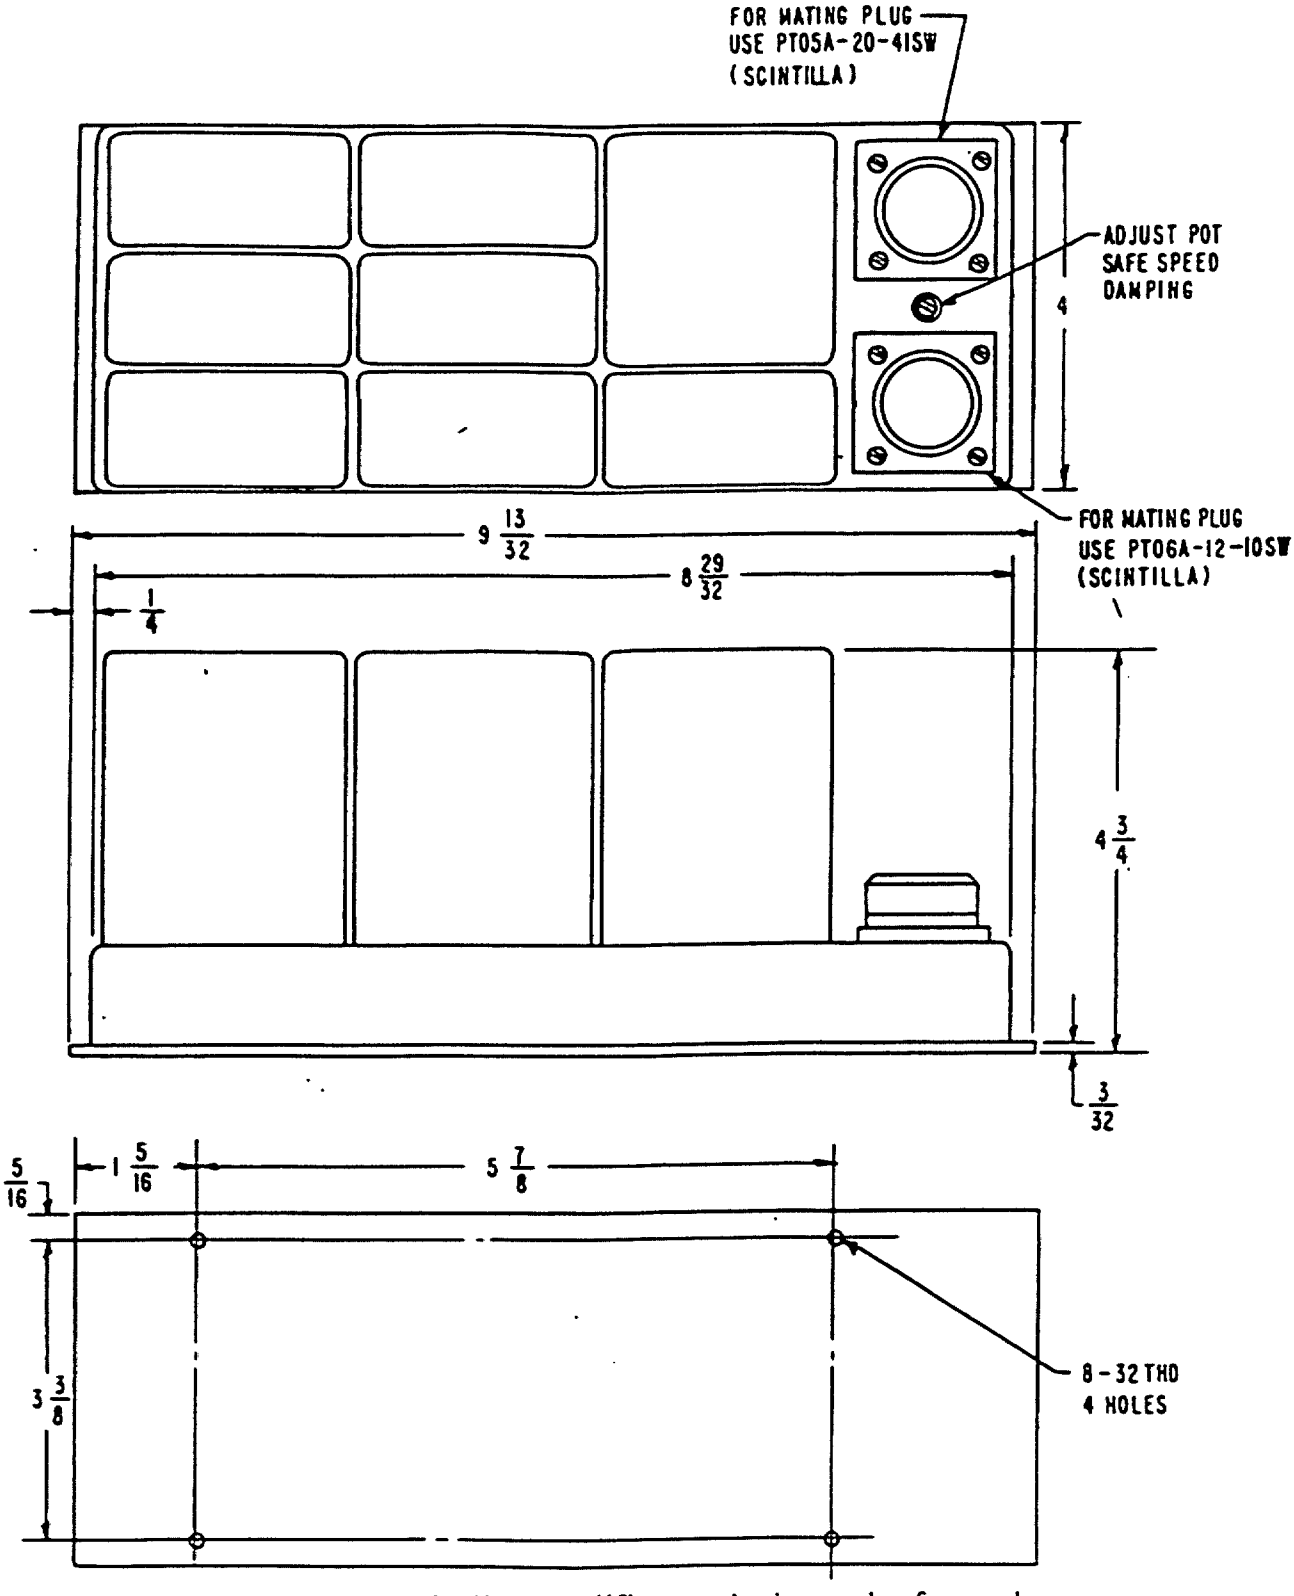


FIGURE 8. Outline, amplifier, mach-air speed safe speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.


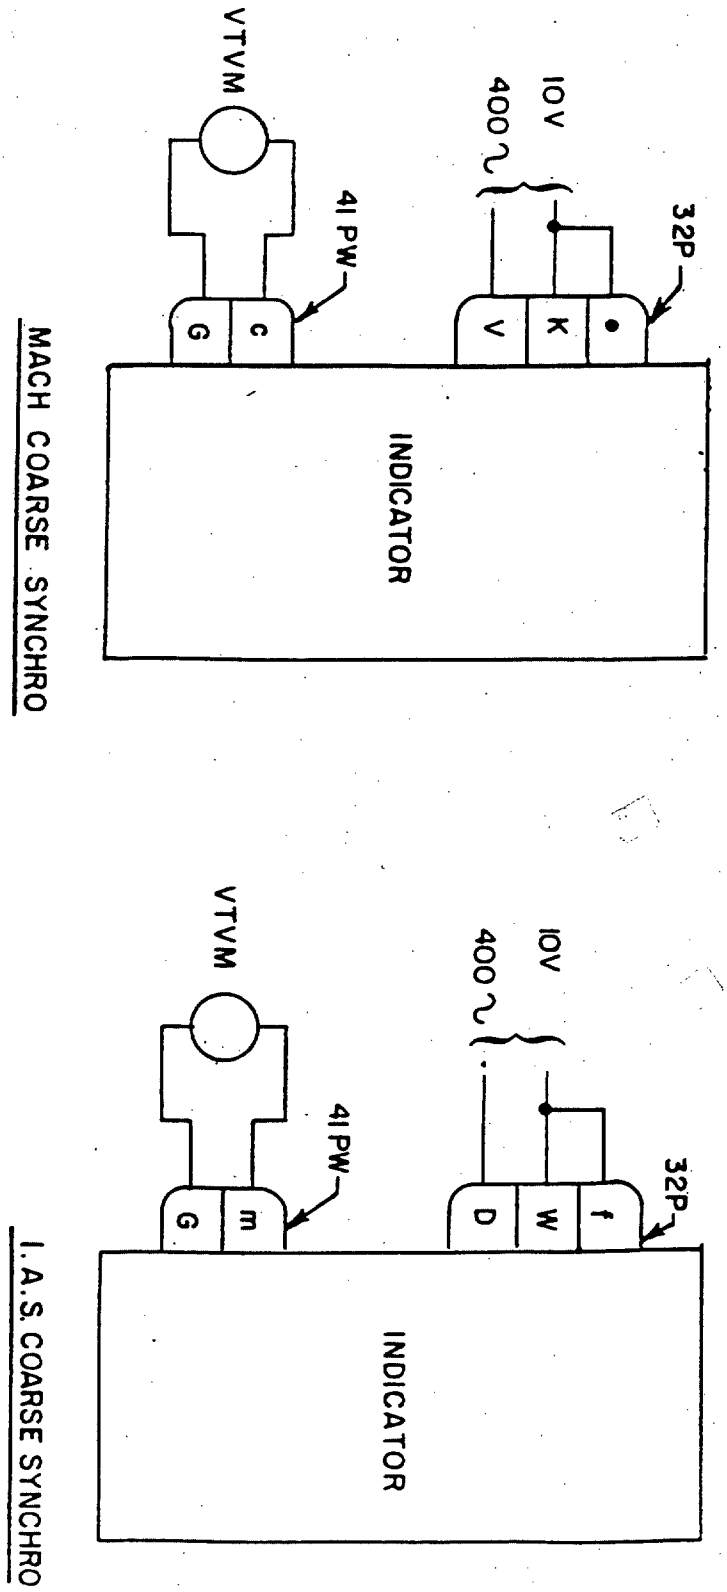


FIGURE 9. Synchro correspondence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

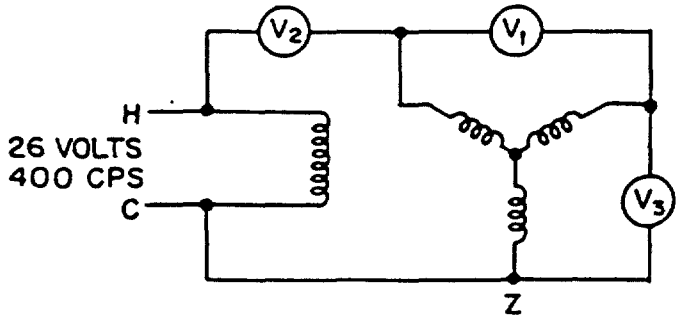

V_1 — VACUUM TUBE VOLTMETER

V_2 — 1000 OHMS / VOLT VOLTMETER

V_3 — 1000 OHMS / VOLT VOLTMETER

FIGURE 10. Electrical zero circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

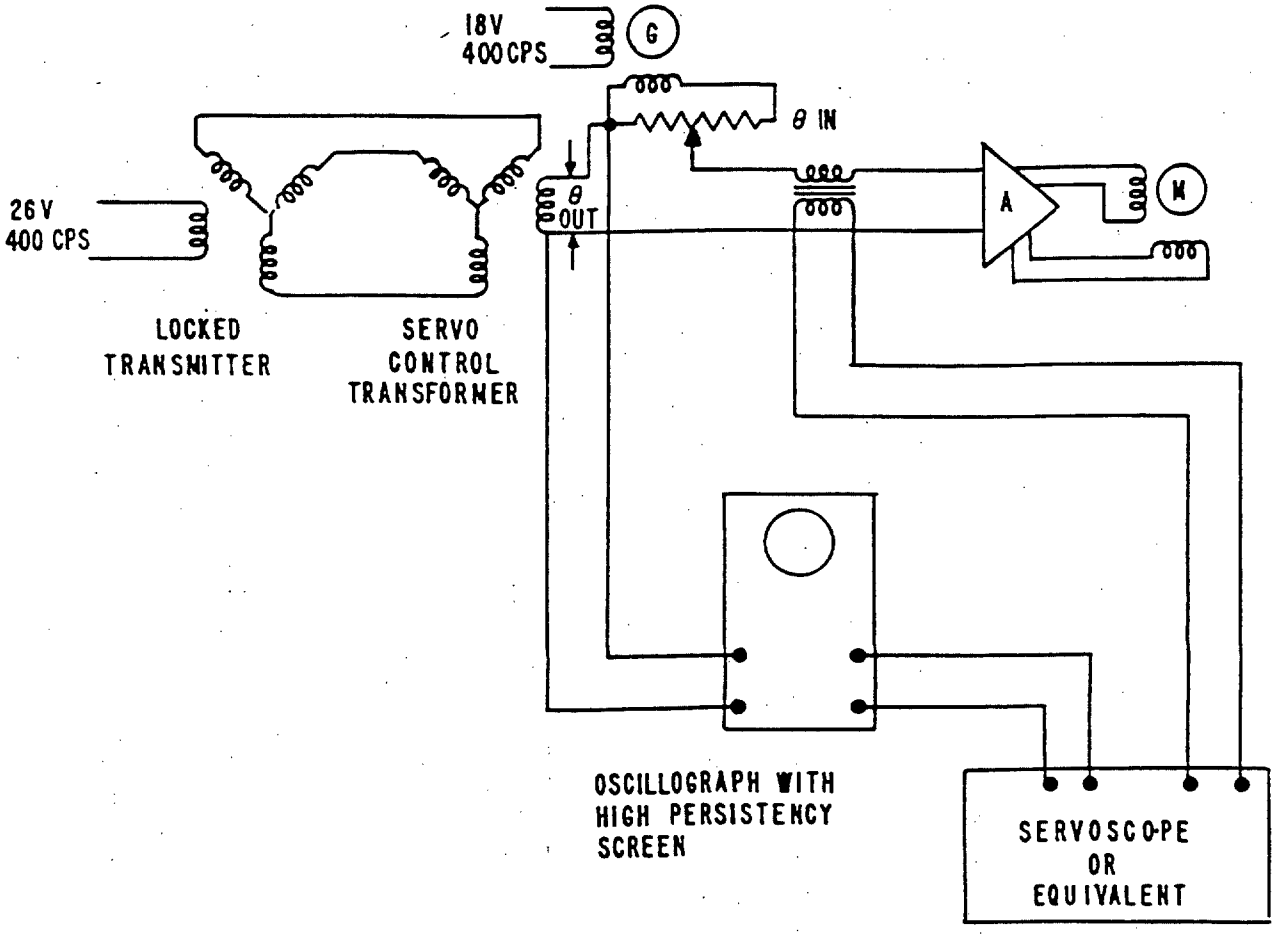


FIGURE 11. Frequency response circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

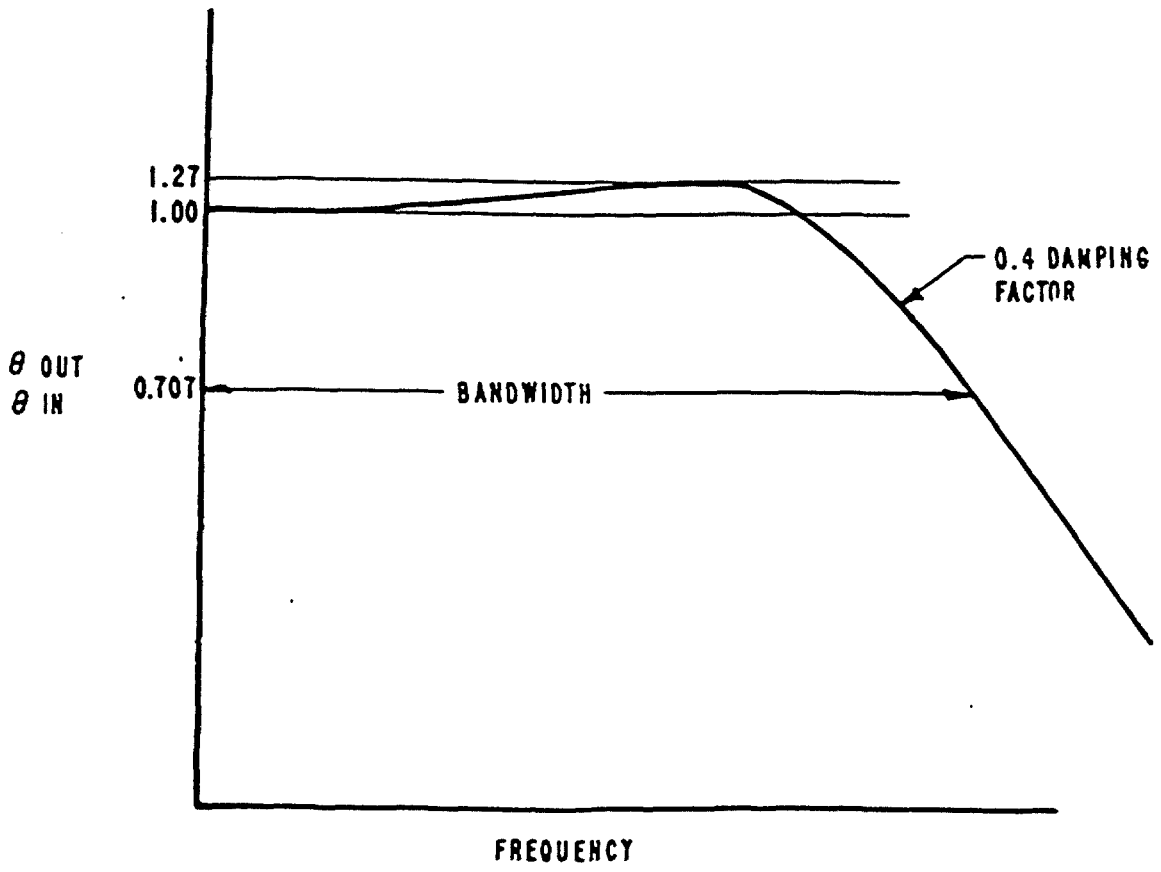


FIGURE 12. Band width and frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

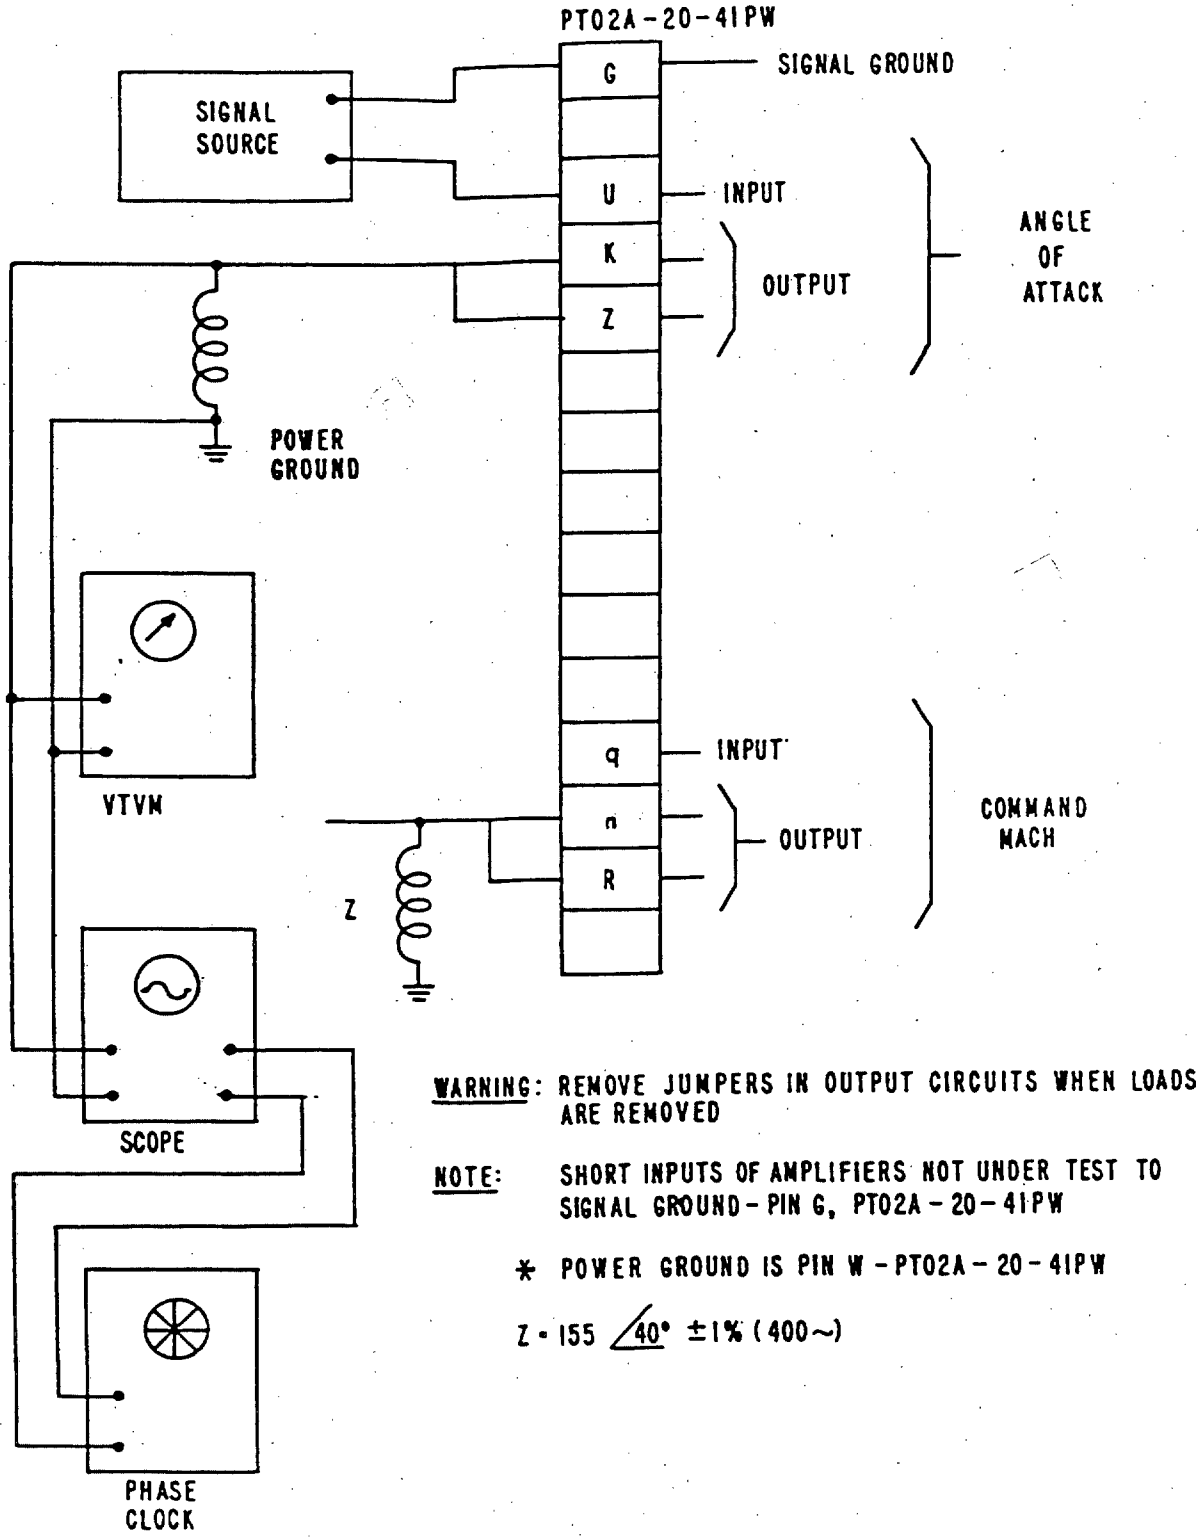


FIGURE 13. Circuit test connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

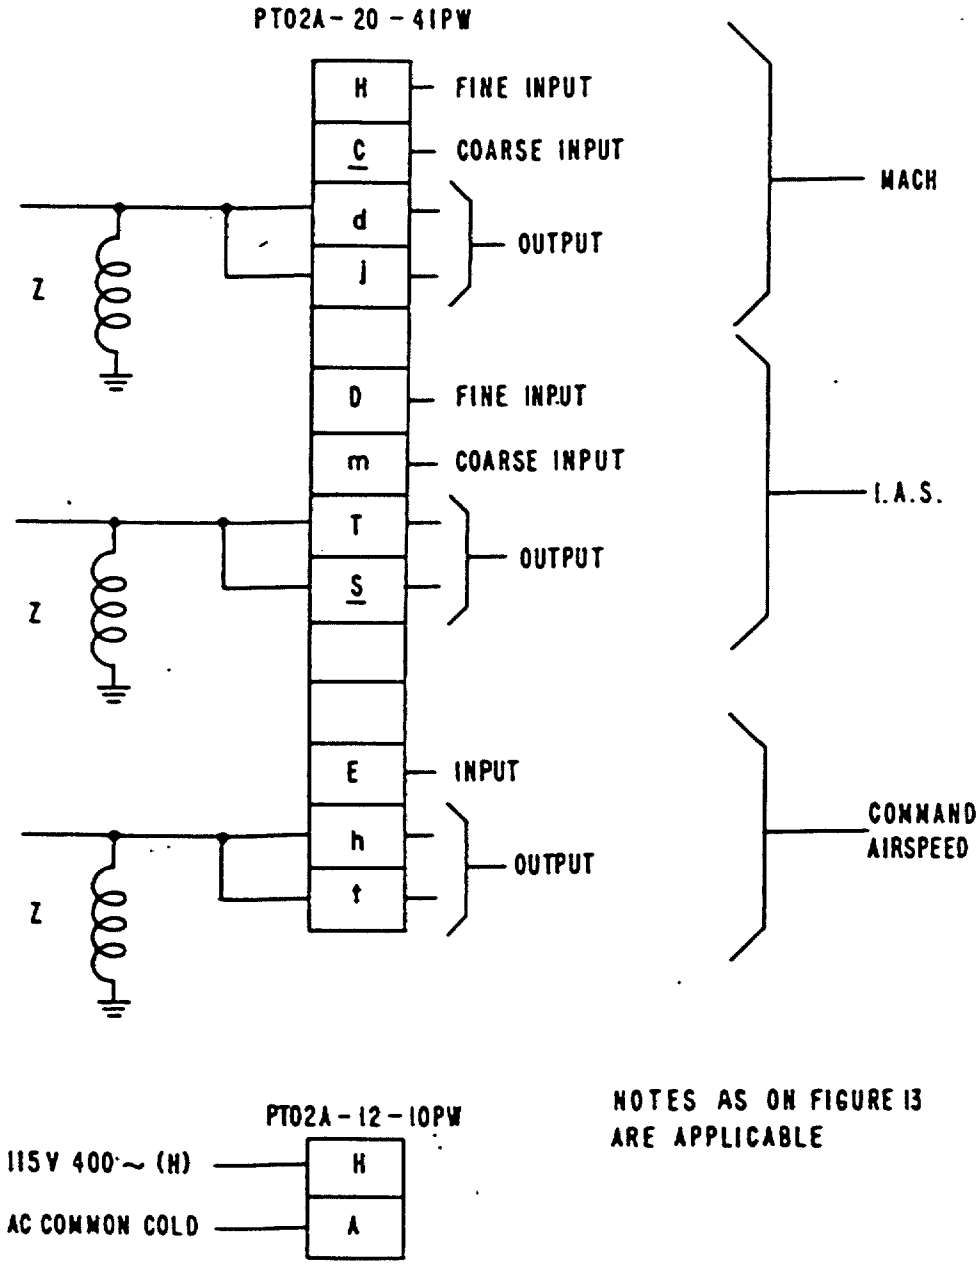


FIGURE 14. Circuit test connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

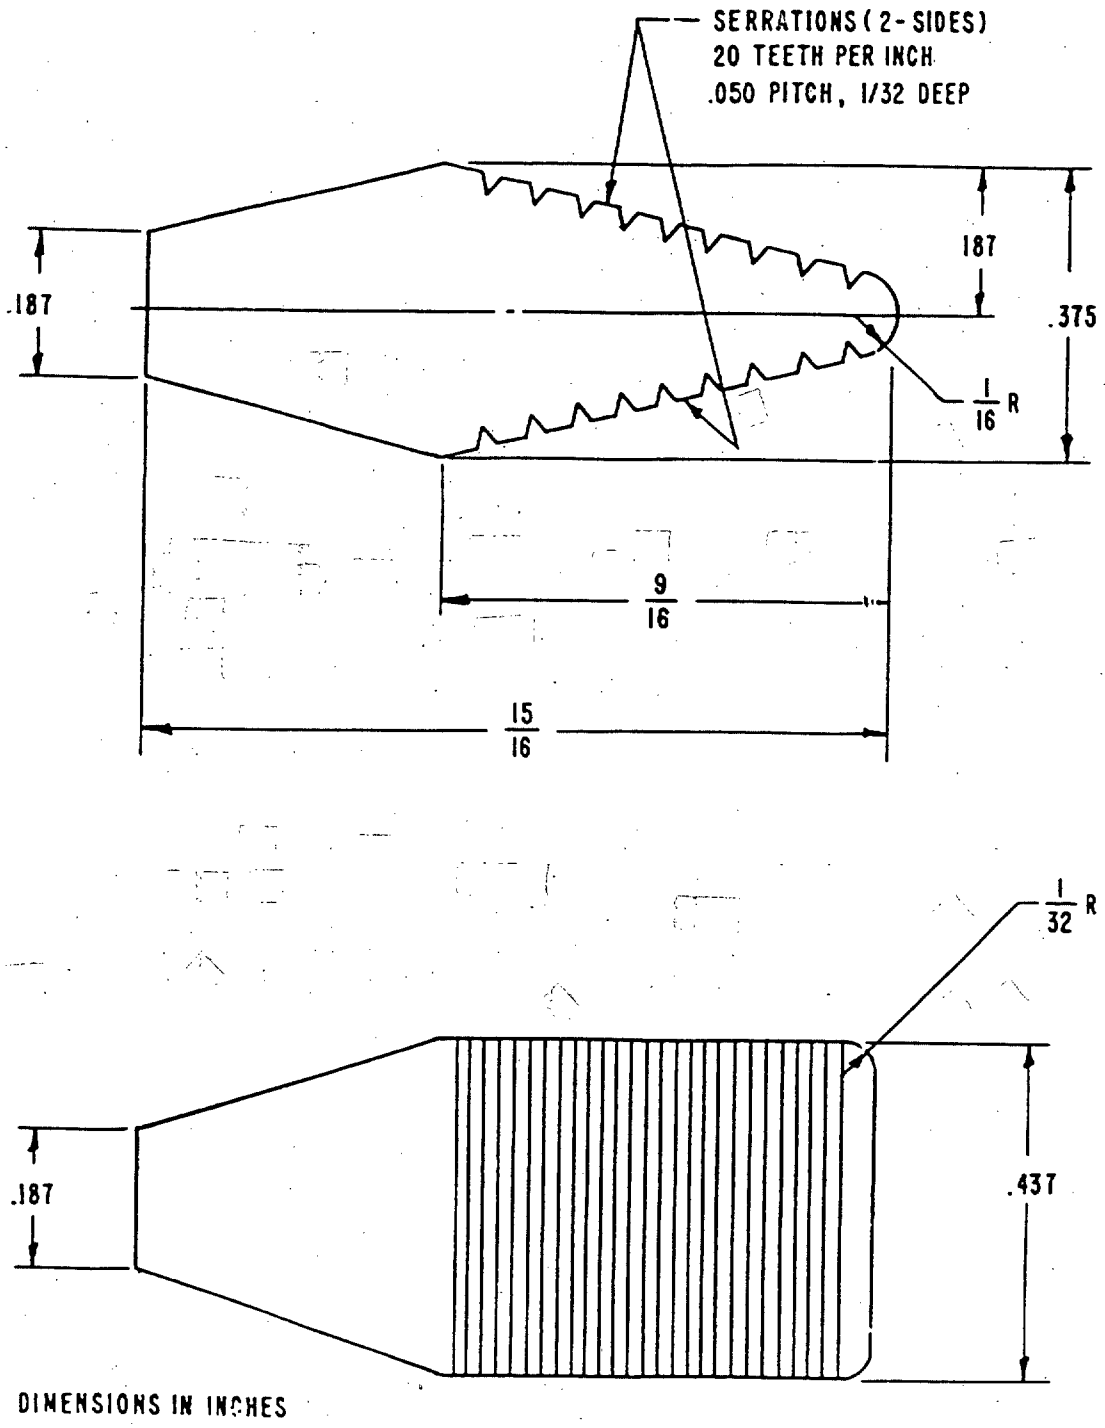


FIGURE 15. Slew switch knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

Custodian:
AIR FORCE -99

Preparing Activity:
AIR FORCE -71

Project Number:
6610-F364

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2. 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-A-26760D(USAF)	15 DECEMBER 1994

3. DOCUMENT TITLE: AMPLIFIER-INDICATOR GROUP, INDICATED AIRSPEED A/A24G-10

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
OC-ALC/TICLA	(1) Commercial (405) 736-5960	(2) AUTOVON 336-5960
c. ADDRESS (Include Zip Code) 3001 Staff Drive Tinker AFB, OK 73145-5990	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:07Z
Check the source to verify that this is the current version before use.