INCH-POUND

MIL-I-27673C(USAF)
12 February 1993
SUPERSEDING
MIL-I-27673B(USAF)
27 JUNE 1979

MILITARY SPECIFICATION

INDICATOR, TRUE AIRSPEED AVU-15/A

This specification is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of true airspeed indicator, designate AVU-15/A.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of the specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation."

SPECIFICATIONS

Federal

PPP-B-1672	Boxes, Shipping, Reuseable With Cushioning

Military

MIL-P-116	Preservation, Method Of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Oklahoma City Air Logistics Center/TICLA, Tinker AFB OK 73145-5990 by using the Standardization Document Improvement Proposal (DD form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6610

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

MIL-B-131	Barrier Material, Water-Vaporproof, Flexible Heat Sealed
MIL-D-3464	Desiccants, Activated, Bagged, Packaging And Packaging Use And Static Dehumidification
MIL-T-5350	Transmitters, Synchro Operated, Aircraft, General Specification For
MIL-I-7057	Indicator, Synchro, Aircraft, General Specification For
MIL-C-14806	Coating, Reflection Reducing, For Instrument Cover Glasses And Lighting Wedges
MIL-L-27160	Lighting, Instrument, Integral, White, General Specification For

STANDARDS

Federal

FED-STD-101	Preservation, Packaging And Packing Materials: Test Procedures
FED-STD-595	Colors

Military

MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of U. S. Military Property
MIL-STD-810	Environmentat Test Methods
MIL-STD-2073/1B	Procedures For Development And Application Of Packaging
MS20003	Indicator, Humidity, Card, Three-spot Inpregnated Areas, Cobalstous Chloride
MS33558	Numerals And Letters, Aircraft Instrument Dial, Standard Form Of
MS33585	Pointers, Dial, Standard Design Of Aircraft Instrument
MS33638	Cases, Instrument, Flange Mounted, Aircraft
MS33678	Connector, Receptacle, Electric, Integral Mounting

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Bldg 4D, 700 Robbins Ave, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample be subjected to first article inspection (see 6.2) in accordance with 4.4.

3.2 General specification. The requirements of MIL-I-7057 apply as requirements of this specification with the exceptions and additions specified herein. When the two specifications conflict, this specification shall govern.

3.3 Materials.

3.3.1 Metals. Metals shall be of the corrosion-resistant type of suitably protected to resist corrosion due to fuels, salt fog, or atmospheric conditions likely to be met during storage or normal service. Requirements specified for fungicidal and corrosion protective treatment, anodizing of aluminum alloy parts, and cadmium plating of steel parts are not applicable for parts within hermetically sealed instruments.

3.3.2 Nonmagnetic materials. Except where magnetic materials are essential, nonmagnetic materials shall be used for all parts of the indicator.

3.3.3 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item.

3.4 Design and construction. The indicator shall be designed to indicate true airspeed remotely by means of two self-synchronous receivers, so arranged that one receiver will operate the pointer and the other the subdial when connected to a transmitter conforming to MIL-T-5350, Clifton type CGC-8-A1, or equal.

3.4.1 Electrical zero. Electrical zero shall be imposed at 300 knots true (pointer at 0, subdial at 3).

3.5 Preformance. The indicator shall be capable of satisfactory operation after exposure to the following conditions:

a. Operating temperatures ranging from -54° to +71°C and storage temperatures ranging from -62° to +71°C.

b. Vibration incident to service use.

c. Salt-laden atmosphere.

d. Scale, friction, and position errors as specified.

3.6 Case. The case shall conform to MS33638 and figure 1 and shall be hermetically sealed.

3.7 Electrical connectors. Electrical connectors shall be in accordance with figure 1 and shall be equipped with a water-vaporproof cap. The polarized key of each connector shall be located on the vertical centerline of the side nearest the top of the indicator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

3.7.1 Internal wiring. Internal wiring shall be color coded and connected to the receptacle pins as shown on figure 2.

3.8 Dials. The dials shall conform to figure 3.

3.8.1 Visibility of dial markings. The pointer and all graduations, numerals, and any other markings on the dial shall be readable from any point within the frustum of the cone, the side of which makes an angle of not less than 30° with a perpendicular to the dial and the small diameter of which is the aperture of the dial.

3.8.2 Dial markings. Unless otherwise specified, all numerals and letters on the indicator, other than the nameplate shall be marked in accordance with MS33558.

3.8.2.1 Finish and dimensions. The following markings shall be finished in dull white, color no. 37875 of FED-STD-595. The dimensions shall be as justified.

Main Dial	Height or Length Inch +0.010	Width of Line or Graduation Inch +0.005
Numerals 0, 20, 40, 60, 80	0.187	0.030
Graduations corresponding to 0, 10, 20, 30, 40, 50, 60, 70, 80, 90 knot readings	As shown on figure 3	0.030
Graduations corresponding to 5, 15, 25, 35, 45, 55, 65, 75, 85, 95 knot readings	As shown of figure 3	0.020
1-knot graduations from 1 to 99 knots, inclusive	As shown on figure 3	0.010
Triangular index	0.156	0.156
Lettering KNOTS and TRUE	0.125	0.030

Subdial	Height of Length Inch +0.010 (Minimum)	Width of Line or Graduation Inch +0.005
Numerals 0, 1, 2, 3, 4, 5, 6, 7, 8, 9	0.312	0.030
Graduations corresponding to numerals 0, 1, 2, 3, 4, 5, 6, 7, 8, 9	0.125 Visible through main-dial cutout	0.030
Graduation between numerals 0-1, 1-2, 2-3, 3-4, 4-5, 5-6, 6-7, 7-8, 8-9, 9-0	0.063 Visible through main-dial cutout	0.020

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.


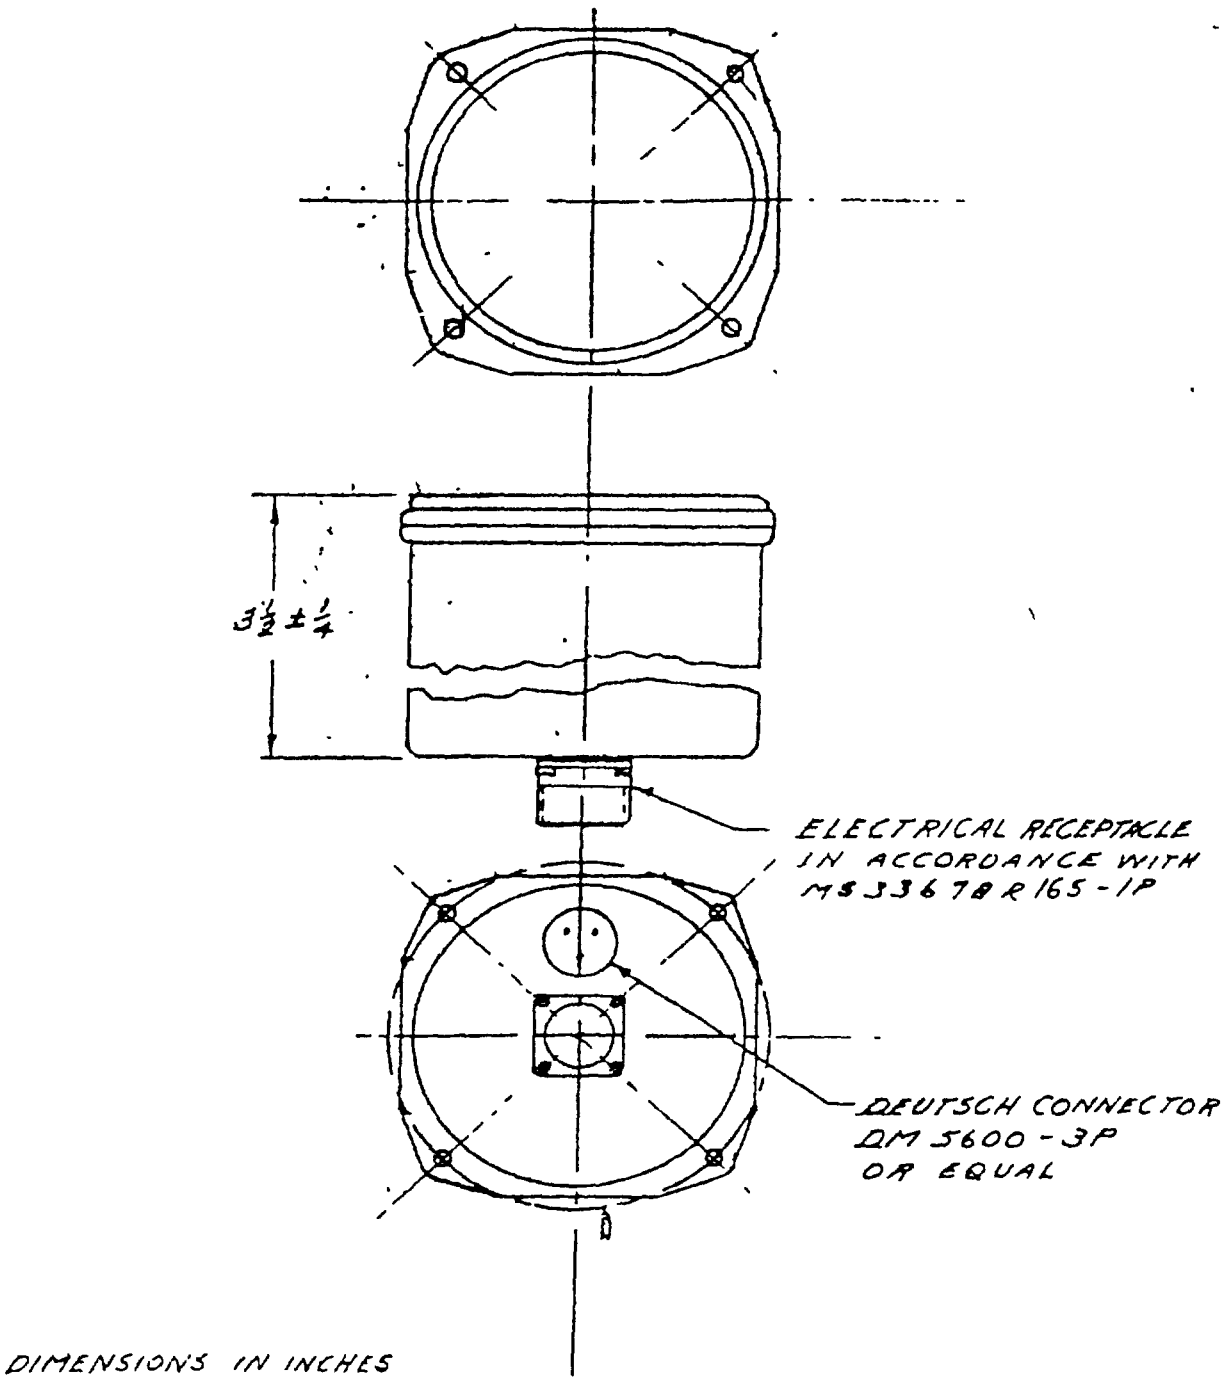


FIGURE 1. Case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

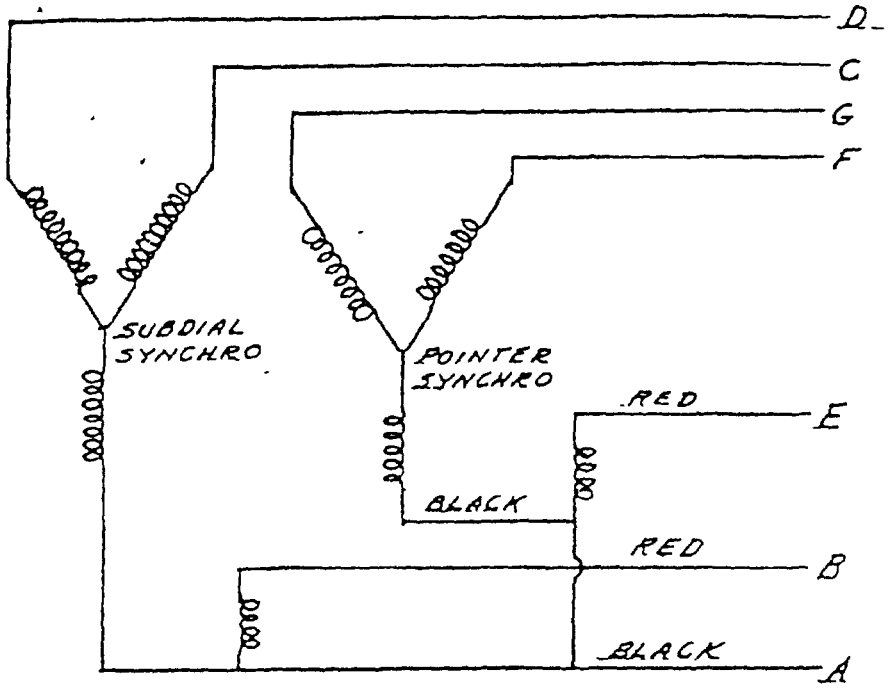


NOTE 1: THE YELLOW AND BLUE LEADS OF SUBDIAL SYNCHRO SHOULD BE CONNECTED TO PINS C AND D IN SUCH A MANNER THAT THE STATOR PHASE SEQUENCE WILL BE IN THE ORDER OF C, A, AND D FOR INCREASING TRUE AIRSPEED.

NOTE 2: THE YELLOW AND BLUE LEADS OF THE POINTER SYNCHRO SHOULD BE CONNECTED TO PINS F AND G IN SUCH A MANNER THAT THE STATOR PHASE SEQUENCE WILL BE IN THE ORDER OF G, A, AND F FOR INCREASING TRUE AIRSPEED.

FIGURE 2. Internal wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

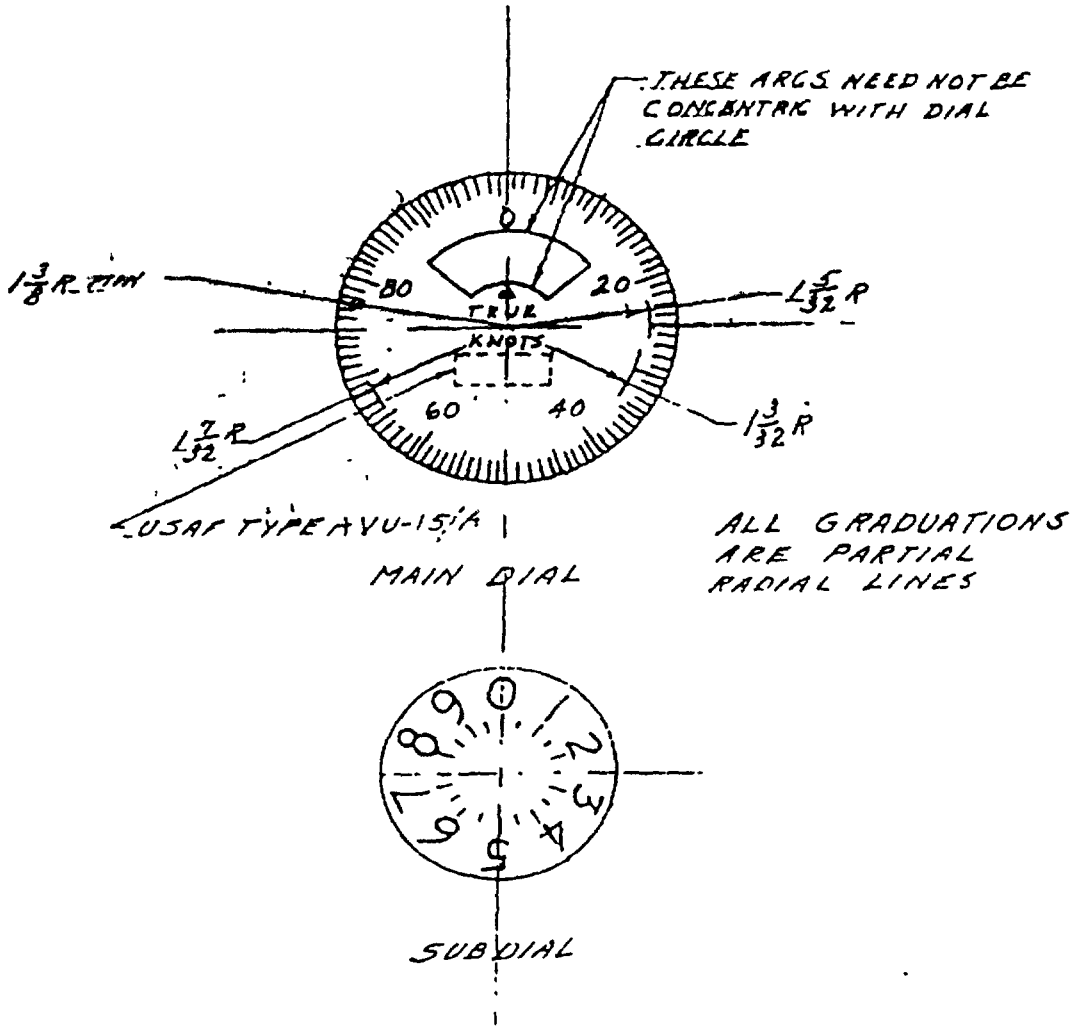

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED.
TOLERANCE: FRACTIONS ± 1/64

FIGURE 3. Dials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

3.8.2.2 Dull black markings. The following markings, and all other markings not otherwise specified, shall be permanently and legibly marked on the dial in durable dull black.

Lettering	Height - Inch +0.010
USAF	3/64
AVU-15/A	3/64

3.9 Pointer. The pointer shall be designed in accordance with MS33585-3, shall be as light as practicable, and sufficiently rigid to prevent oscillation under vibration. The pointer shall be firmly attached to the mechanism, but shall be redily adjustable.

3.10 Lighting. The indicator shall be integrally lighted in accordance with MIL-L-27160. Lighting acceptability shall be based on visual comparison with a prime standard. The method of lighting shall be approved by the procuring activity prior to fabrication of the indicator.

3.10.1 Lighting circuit. The lighting circuit shall be in accordance with figure 4 and shall operate on 5V dc.

3.10.2 Prime standard. The prime standard lighting reference instrument shall be prepared as follows: A minimum of 20 areas covering the entire face of the indicator shall be measured for brightness level in foot-lamberts. The overall brightness measurements shall be recorded. The prime standard instrument and recorded data shall be submitted to the procuring activity for approval. If approved, the prime standard shall be certified; however, it shall be checked at least every 100 hours of operation to determine any change in brightness. Variations greater than +20 percent in two or more areas shall void the certification.

3.11 Reflecting surfaces. All reflecting glass surfaces shall be provided with a reflection reducing coating which meets the requirements of MIL-C-14806.

3.12 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130. The following marking shall be included:

26V, 400 Cycle.


3.13 Weight. The weight of the indicator shall not exceed 2 pounds.

3.14 Installation.

3.14.1 Mounting screws. The contractor shall furnish sufficient mounting screws for installing the indicator. They shall be round-head, brass machine screws having a durable dull black finish and of sufficient length to permit mounting the indicator on a 3/16-inch thick panel. Screw threads shall be size 6-32 NC-2A.

3.14.2 Mounting lugs. Mounting lugs having a 0.170-inch diameter hole shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

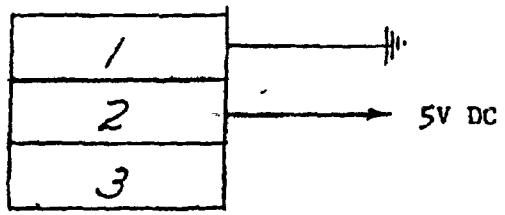

NOTE: Voltage shall be measured at the respective pins of the connector plug which mates with the indicator receptacle.

FIGURE 4. Wiring-lighting circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

3.14.3 Evenlope. An envelope containing the mounting screws and lugs shall be furnished with each indicator. The following information shall be printed on the face of the envelope:

IMPORTANT
THIS ENVELOPE CONTAINS
MOUNTING SCREWS AND LUGS

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract of purchanse order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requierments.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Governmer for acceptance comply with all requirements of the contract. Sampling inspection, part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First atricle inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.2.1 Classification of tests. The inspection and testing of indicators shall be in accordance with MIL-I-7057 with the exceptions and additions specified herein. All references in MIL-I-7057 to qualification shall be understood, for the purpose of this specification, to be First Article tests.

4.2.1.1 For the purpose of this specification, identification of tests shall be as follows:

MIL-I-27673 (USAF)	MIL-I-7057
First Article tests	Qualification or Preproduction Tests
Quality Conformance test	Quality Conformance tests
Sampling plan A	Sampling plan A
Sampling plan B	Sampling plan B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in para 4.3.1 of the specification.

4.3.1 Standard test transmitter. The indicator shall be tested against a standard test transmitter which shall consist of a Clifton type CGC-8-A1, or equal, high-precision transmitting synchro and a stand with a fixture that will permit mounting the synchro in such a manner that the synchro rotor may be varied with respect to the stator. The stand shall have provisions for adjusting and indicating angular movement of the synchro rotor with respect to the stator within 0.005° at any place within full 360° rotation. The following procedure shall be used to calibrate the standard test transmitter:

a. Designate the rotor leads H (hot) and C (cold).

b. Select one of the stator leads, designate it Z, and tie this lead to the C rotor lead.

c. Apply 26V 400 cycles across the H and C leads, and ground together the C and Z leads. Rotate the rotor or stator until the output of the remaining leads are at null or minimum voltage.

d. Measure the voltage between lead H and the remaining stator leads which are strapped together. If this voltage is less than the excitation voltage of the rotor, the synchro is at low null or electrical zero position. If the voltage is greater than the rotor excitation voltage, the synchro is at high null or the 180° position.

e. This indicator shall use the high null as electrical zero. Place the rotor at high null or the 180° position. Connect a voltmeter across one of the remaining stator leads and the ground, with the second lead open. When the synchro rotor is turned clockwise, the voltage will increase before decreasing if the X stator lead is connected. If the Y stator lead is connected, the voltage will decrease before increasing. The leads of the synchro shall be labeled in accordance with the results of the above procedures.

4.3.2 Indicator connections. For test purposes, the indicator shall be connected to the standard test transmitter in accordance with the following to provide for clockwise rotation of the transmitter synchro rotor for an increase in indicator dial function.

Test transmitter	Z C	H	X	Y
Subdial synchro	A	B	C	D
Pointer synchro	A	E	G	F

4.4 Test methods.

4.4.1 Individual tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

4.4.1.1 Scale error and friction. The friction errors, before tapping, shall not exceed the tolerances specified in table I after tapping shall not exceed the tolerances specified in tables II and III. This test shall be conducted at each point specified in tables II and III.

TABLE I

ERROR TOLERANCES (BEFORE TAPPING)

Test	Tolerance - Knots
Friction	
Pointer	1-1/2
Subdial	15
Position error	
Pointer	1
Subdial	10
Vibration error	
Pointer	2
Subdial	20
High and low temperature	
Ponter friction	2
Subdial friction	20
Pointer scale error	1/2 knot additional
Subdial scale error	5 knots additional
Salt fog	
Pointer friction	1
Subdial friction	10
Pointer scale error	1
Subdial scale error	10

TABLE II

INDICATOR POINTER ERROR TOLERANCES (AFTER TAPPING).

Transmitter Setting Degrees	Indicator Pointer Knots	Tolerance Knots
0	0	1/2
36	10	1/2
72	20	1/2
108	30	1/2
144	40	1/2
180	50	1/2
216	60	1/2
252	70	1/2
288	80	1/2
324	90	1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

TABLE III

INDICATOR SUBDIAL ERROR TOLERANCES (AFTER TAPPING).

Transmitter Setting Degrees	Indicator Subdial Knots	Tolerance Knots
0	300	10
36	400	10
72	500	10
108	600	10
144	700	10
180	800	10
216	900	10
288	100	10
324	200	10

4.4.1.2 Position error. Position error shall not exceed the tolerances specified in table I. The test shall be conducted on the pointer and subdial independently.

4.4.2 Sampling tests.

4.4.2.1 Sampling plan A. Five indicators shall be selected form each 100 or fraction thereof produced on the contract or order and subjected to the following tests in addition to those tests specified in MIL-I-7057.

4.4.2.1.1 Vibration error. Standard test transmitters shall be connected to the indicator, set to approximately midscale, and the indicator vibrated at an amplitude between 0.003 and 0.005 inch at frequencies of 500 to 3,000 cpm. The maximum total oscillation and the variation of the subdial pointer shall not exceed the values specified in table I.

4.4.2.1.2 Low temperature. After subjection to -54° for a 3-hour period, the indicator shall be checked for friction and scale errors as specified in 4.4.1.1. The indicator shall required not more than 30 seconds to come within the specified tolerances and friction and scale errors shall not exceed the tolerances specified in table I.

4.4.2.1.3 High temperature. After subjection to 71°C for a 3-hour period, the indicator shall be checked for friction and scale errors as specified in 4.4.1.1. The friction and scale errors shall not exceed the tolerances specified in table I.

4.4.2.1.4 Lighting. The indicator shall be subjected to lighting tests in accordance with MIL-L-27160.

4.4.2.2 Sampling plan B. Unless otherwise specified, three indicators shall be selected at random from the first 15 on the contract or order and subjected to the following tests in addition to those tests specified in MIL-I-7057.

4.4.2.2.1 Electrical characteristics. The indicators shall be tested for compliance with the requirements specified for the primary circuit, power input, secondary

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

voltage, and operation with either one or two indicators without a change in indication of more than 1° of arc.

4.4.2.2.2 Low temperature exposure. The indicator shall be subjected to a low temperature exposure test in accordance with method 502.1, Procedure II of MIL-STD-810C. At the end of the 72-hour period, the indicator shall be checked to determine that the pointer moves over the entire scale range and that no parts have been damaged. While at -62° +2°C, the indicator shall be subjected to the test specified in 4.4.1.1. The indicator shall require not more than 30 seconds to come within the specified tolereances and the scale and friction errors shall not exceed the values specified in 4.4.2.1.2. The indicator shall then be maintained at room temperature for a minimun period of 1 hour after which it shall again be subjected to the test specified in 4.4.1.1. The scale errors shall not exceed the tolerances specified therein and there shall be no deterioration nor damage due to the extreme temperature exposure.

4.4.2.2.3 High temperature exposure. The indicator shall be subjected to a high temperature exposure test in accordance with method 501.1 Procedure II of MIL-STD-810C for a period of 48 hours. At the end of this period and at the specified temperature, the indicator shall be tested for scale errors as specified in 4.4.1.1. The friction and scale error tolerances shall not exceed those specified in 4.4.2.1.3. The indicator shall then be maintained at room temperature for a minimum period of 1 hour and again subjected to the test specified in 4.4.1.1. The scale errors shall not exceed the tolerances specified therein and there shall be no deterioration nor damage due to the extreme temperature exposure.

4.4.2.2.4 Salt fog. The indicator shall be subjected to a salt fog test in accordance with method 6=509.1, Procedure I of MIL-STD-810C. Corrosion or other damage that would affect subsequent operation of the indicator shall be cause for rejection.

4.4.2.2.5 Vibration failure. The indicator shall be subjected to vibration tests in accordance with curve B on Figure 514.2-2 of MIL-STD-810C. The indicator shall be tested with method 514.2, Procedure I, from 5 to 500 cycles per second at an applied double amplituds of 0.010 inch or +2g, whichever is less.

4.5 Packaging inspection.

4.5.1 Quality conformance. The inspection of the preservation-packaging and interior package marking shall be in accordance with group A and B quality conformance inspection requirements, section 4 of MIL-P-116. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of applicable container specification and the marking requirements of MIL-STD-129.

4.5.2 First article. When the unit container is capable of serving as the shipping container First Article inspection, and rough handling tests as outlined in section 4 of MIL-P-116, shall be accopmlished followed by a functional test of the unit to insure freedom from operational malfunction.

5. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

5.1 Preservation. Preservation shall be level "A" or "C", as specified. (see 6.2)

5.1.1 Preservation-packaging. Unless otherwise specified by the contracting activity, item shall be packaged in quantity unit pack (QUP) of one each. Each item will be provided a preservation method IIc IAW MIL-P-116.

5.1.2 Cleaning. Item shall be cleaned IAW MIL-P-116 C-1 process.

5.1.3 Drying. Immediately after cleaning, the item shall be dried following any one of combination of the drying procedures listed in MIL-P-116. The drying procedures employed shall not be injurious to the item.

5.1.4 Level A. Item shall be preserved IAW MIL-P-116 and MIL-STD-2073/1B to provide a method IIc.

5.1.5 Level C. Item shall be individually preserved in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment form the supply source to the first receiving activity as specified in MIL-P-116 and MIL-STD-2073-1B.

5.2 Packing. Packing shall be level "A", "B", or "C", as specified (see 6.2)

5.2.1 Container-Cushioning. Intermediate container requirements shall conform to PPP-B-1672, weather-resistant, unless otherwise specified by the contracting activity. Intermediate containers shall be large enough to allow for application of sufficient cushioning material, between the unit container and intermediate container. Cushioning material shall be of sufficient density and thickness to insure shock transmission does not exceed peak values in G's extablished for the item.

5.2.2 Level A. Item will be preserved as specified in 5.1 and shall be packed in exterior containers conforming to PPP-B-1672, wether-resistant, unless otherwise specified by the contracting activity. Exterior container shall be uniform shape, size and minimum tare and cube, consistent with the protection required. Closure shall be in accordance with appropriate PPP-B-1672 procedure, as specified by contractor, special packaging instructions (SPI), and contracting activity.

5.2.3 Lever B. Same a Level "A" unless otherwise specified by special packaging instructions (SPI) or the contracting activity.

5.2.4 Level C. Item will be packed in containers in such a manner as to afford adequate protection against physical damage during direct domestic shipment from the supply source to the first receiving activity. These packs shall conform to MIL-STD-2073/1B.

5.3 Marking. Unit container requirements shall conform to MIL-B-131, barrier material, unless otherwise specified the contracting activity. Unit, intermediate, and exterior containers shall be marked IAW special markings required by the contractor, special packaging instructions (SPI) and MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

5.4 Inspection and Test. Test of methods of preservation shall be accomplished in accordance with section 4 of MIL-P-116 to insure compliance with section 5 of this specification. Packaging tests shall be conducted IAW rough handling as specified in FED-STD-101.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The AVU-15/A indicator covered by this specification is intended for use in indicating true airspeed remotely.

6.2 Auquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see2.1).
c. When sampling plan B tests will not be conducted.
d. When a first article is required for inspection and approval (see 3.1 and 4.2).

6.3 First article When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, astandard product item from the contractor,s current inventory (see 3.1) and the number of items to be tested as specified in 4.2.

6.4 Subject term (key word) listing.

Lighting
Synchro
3-Inch

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
AIR FORCE -99

Preparing Activity:
AIR FORCE -71

Project Number:
6610-F358

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2 3, and 8 In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE. This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-I-27673C(USAF)	2 DOCUMENT DATE (YYMMDD) 93 02 12

3. DOCUMENT TITLE
INDICATOR,TRUE AIRSPEED AVU-15/A

4 NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5 REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY	
a NAME	b TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (405) 736-5960 336-5960
c. ADDRESS (Include Zip Code) OC-ALC/TICLA TINKER AFB, OK 73145-3037	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041 3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete* 198-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.