[INCH-POUND]
MIL-I-27674C(USAF)
01 SEPTEMBER 1994
SUPERSEDING
MIL-I-27674B(USAF)
1 February 1983

# MILITARY SPECIFICATION

# INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense

## 1. SCOPE

1.1 Scope This specification covers the requirements for electrical resistance temperature indicators

1.2 Classification Indicators shall be of the following types, as specified (see 6.2):

EHU-21A Antireflective coating on coverglass per MIL-C-675 with white integral lighting.

EHU-21A/A High efficiency antireflective coating on coverglass with white integral lighting.

EHU-21A/A-I High efficiency antireflective coating on coverglass with red integral lighting.

## 2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise-

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Resources & Logistics Services Division, SA-ALC/TILDD, Bldg 171, Post C-12, 485 Quentin Roosevelt Rd, Kelly AFB, TX 78241-6425 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6685

AMSC N/A

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2)

SPECIFICATIONS

MILITARY

| | |
|---|---|
| MIL-C-675 | Coating of Glass Optical Elements (Anti-Reflection) |
| MIL-E-5400 | Electronic Equipment, Airborne, General Specification for |
| MIL-I-7070 | Indicator, Temperature, Electrical Resistance, Hermetically Sealed, General Specification for |
| MIL-L-25467 | Lighting, Integral, Red Aircraft Instrument, General Specification for |
| MIL-L-27160 | Lighting, Instrument, Integral, White General Specification for |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-595 | Colors used in Government procurement |

MILITARY

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-147 | Palletized Unit Loads |
| MIL-STD-781 | Reliability Testing for Engineering Development Qualification and Production |
| MIL-STD-785 | Reliability Program for Systems and Equipment Development and Production |
| MIL-STD-810 | Environmental Test Methods and Engineering Guidelines |
| MS33639 | Cases, Instrument, Clamp-Mounted, Aircraft |
| MS33678 | Connector, Receptacle, Electric, Integral Mounting |

(Copies of the Federal and Military specifications, standards, and handbooks are ordered from Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

AMERICAN SOCIETY FOR TESTING AND MATERIAL (ASTM)

| | |
|---|---|
| ASTM D-3951 | Packaging, Commercial |

(Application for copies of this ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

FEDERAL AVIATION AGENCY

Technical Standard Order

TSO-C43 Temperature Indicators

(Copies of the FAA document may be obtained from the Federal Aviation Agency, Washington, DC 20553.)

2.3 Order of Precedence. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3 REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 General specification. The requirements of MIL-I-7070 apply as requirements of this specification with the exceptions and additions specified herein. When the two specifications conflict, this specification shall govern.

3.3 Construction.

3.3.1 Case. The indicator case shall be in accordance with MS33639 for the 2-inch diameter size. The case length shall be 4 ±1/2 inches.

3.3.2 Dial. The dial shall conform to Figure 1 for EHU-21/A and EHU-21A/A; for EHU-21A/A-1 CSD (constant speed drive) shall be replaced by "WBT" (weapons bay temperature). The diameter of the dial as measured across the outer ends of the graduations shall be not less than 1-3/4 inches. The 150° Centigrade (C) indication shall be positioned on the horizontal centerline at the left side of the dial. The dial blank shall consist of a flat disc of plastic, metal, or other material which will permit compliance with the lighting and other requirements specified herein.

3.3.2.1 Lighting. The dial shall be integrally lighted in accordance with MIL-L-27160 or MIL-L-25467, as applicable.

3.3.2.2 Scale arc. The indicator shall provide a scale arc angle of 260 degrees +1 degree. The mechanism shall not be geared to obtain the specified scale arc. Adjacent scale graduations shall be spaced within 1 angular degree of precise linear spacing.

3.3.2.3 Coverglass coating. The reflecting glass surface of the EHU-21/A indicator shall be finished with a coating which conforms to MIL-C-675. The EHU-21A/A and EHU-21A/A-1 indicator shall be finished with a high efficiency coverglass coating conforming to the following



Source: https://assist.dla.mil -- Downloaded: 202640-20T12:40Z
Check the source to verify that this is the currentversion before use.

The coating shall withstand the environmental conditions specified herein

Reflectance Tolerances

| Angle of Incidence | Wavelength Millimicrons | Percent Reflectance |
|---|---|---|
| 0 degree | 450 - 675 | 0.5 maximum |
| 0 degree | 425 - 700 | 0.5 average |
| 30 degrees | 450 - 625 | 1.0 maximum |
| 30 degrees | 425 - 700 | 0.5 average |

3.3.3 Pointer. The pointer shall be lighted in accordance with MIL-L-27160. The pointer width 0.50 ±0.063 inch from the tip shall be 0.078 ±0.016 inch and shall taper to-a width of 0.020 +0.005 inch at the tip. The length of the pointer shall be such that the tip of the pointer will extend 0.019 to ±0.016 inch into the shortest scale graduation.

3.3.3.1 Pointer overswing. The pointer overswing shall be not less than 3 angular degrees beyond each end of the scale.

3.4 Dial to coverglass location. The distance between the inner surface of the coverglass and the dial surface shall not exceed 0.188 inch.

3.5 Electrical receptacle. An MS33678-14S-5P hermetically sealed electrical receptacle shall be provided. It shall be located on the vertical and horizontal centerlines at the rear of the case. The polarizing pin shall be located at top center of the receptacle. The receptacle shall be wired as follows:

Pin Connection


A 28 volts direct current (DC)
B Resistance bulb connection
C Ground and remaining bulb connection
D 5 volts lighting input
E 5 volts lighting ground

3.6 Electronic components. Electronic components and the application thereof shall conform to MIL-E-5400

3.7 Power consumption. The power consumption of the indicator, exclusive of the lighting circuit, shall not exceed 2 watts.



Source: https://assist.dla.mil -- Downloaded: 202640-20T12:40Z
Check the source to verify that this is the current version before use.

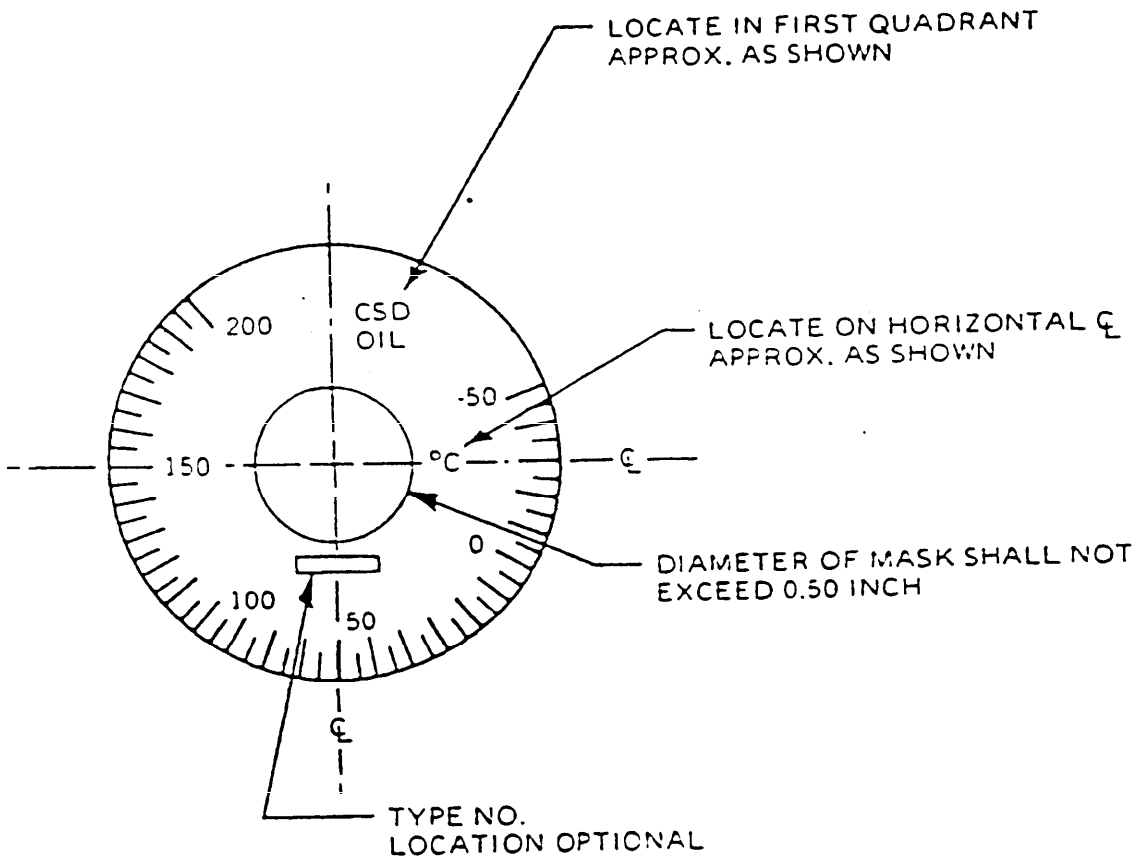


NOTE: "CSD OIL" SHALL BE REPLACED BY "WST" FOR EHU-21A/A-1

Figure 1. INDICATOR



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

3.8 Markings

3.8.1 Dimensions and colors. Dimensions and colors of the markings shall be as follows. The colors shall be in accordance with FED-STD-595.

| Marking | Height or Length Inch 0.005 | Width of Line or Graduation Inch 0.005 | Color No. |
|---|---|---|---|
| Numerals | 0.156 | 0.031 | 37875 |
| Major graduations | 0.156 | 0.031 | 37875 |
| Minor graduations | 0.094 | 0.020 | 37875 |
| Lettering "C" | 0.125 | 0.020 | 37875 |
| Oil CSD | 0.094 | 0.020 | 37875 |
| Background of dial and of mask | ------ | ------ | 37038 |
| Type No. | 0.063 | 0.010 | 37038 |

3.9 Nameplate. A metal nameplate shall be permanently attached on the rear of the indicator case.

3.10 Weight. The weight of the indicator shall not exceed 1.0 pound.

* 3.11 Reliability. The contractor shall establish a reliability program in accordance with MIL-STD-785.

3.12 TSO conformance. The indicator shall conform to the requirements of Federal Aviation Agency TSO-C43 for type I indicators.

3.13 Recycled, reclaimed, and virgin materials. Except when intended use of the item will be jeopardized by the use of reclaimed or recycled materials, in preparing new and revising or amending specifications, preparing activities will ensure that:

a. There is no exclusion to the use. .of recovered materials.
b. There is no requirement that an item be manufactured from virgin materials.
c. Within 1 year from the date of issue by the Environmental Protection Agency of guidelines designating items which are or can be produced with recovered materials,specifications for each products require the use of recovered materials to the maximum extent possible.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified



Source: https://assist.dla.mil -- Downloaded: 202640-20T12:40Z
Check the source to verify that this is the currentversion before use.

herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All indicators shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractors overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor's of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 General specification. The inspection and testing and test samples shall be in accordance with MIL-I-7070, except as specified herein.

4.3 Test conditions.

4.3.1 Test voltage. Unless otherwise specified, the test voltage shall be 28.5 volts DC and the lighting circuit shall be energized with 4.5 ±0.5 volts during all tests.

4.3.2 Test tolerances. All test tolerances shall be in accordance with Table I. The tolerances not enclosed in parentheses are applicable only when the indicators are subjected to all the tests in the sequence specified, and the tolerances enclosed in parentheses are applicable only when the indicators are subjected to a specific test, independent of sequence.

4.4 Test methods.

4.4.1 First article tests.

4.4.1.1 Scale error at room temperature. The test resistance specified in Table I shall be applied to the resistance bulb terminals of the indicator. The test voltage shall be applied and the scale errors at the test points shall not exceed the tolerance specified in Table I.

4.4.1.2 Position error. The position error of the indicator shall not exceed 2.5°C.

4.4.1.3 Friction error. The friction error of the indicator shall not exceed 2°C.

4.4.1.4 Insulation leakage. The insulation resistance shall be a minimum of 20 megohms.

4.4.1.5 The indicator shall be subjected to the individual tests specified in MIL-I-27160.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

4.4.1.6 Sealing. The indicator case shall be tested for leaks by means of a mass-spectrometer-type helium-leak detector. Where a nitrogen-helium mixture is utilized as the filling medium, the detected leak rate shall not exceed 0.1 micron cubic foot per hour at a pressure differential of 1 atmosphere. Where 100 percent helium is utilized as the filling medium, the detected leak rate shall not exceed 1.0 micron cubic foot per hour.

* 4.4.2 Sampling plan A tests. Samples shall be selected in accordance with MIL-STD-105, AQL of 2.5, inspection level II.

4.4.2.1 Reduced voltage operation. The indicator shall be subjected to a scale error at room temperature test with an applied voltage of 22.5 volts at the test points in Table I. The indications of the reduced voltage shall not differ from the indications with 28.5 volts applied by more than the tolerances specified in Table I.

4.4.2.2 Scale error at low temperature. The scale errors at low temperature shall not exceed the tolerances specified in Table I.

4.4.2.3 Scale error at high temperature. The scale errors at high temperature shall not exceed the tolerances specified in Table I.

4.4.2.4 Magnetic effect. The magnetic compass shall not deflect more than 5 degrees.

4.4.2.5 Resistance bulb current. A total resistance of 100 ohms shall be applied across the resistance bulb terminals of the indicator, the test voltage applied, and the resistance bulb circuit current reassured. The current shall not exceed 22 milliamperes.

4.4.2.6 Open and short circuit. After open and short circuit, the scale errors shall not exceed the tolerances specified in Table I.

4.4.2.7 Vibration. The indicator shall be subjected to vibration test in accordance with MIL-STD-810, method 514.3, procedure 1, category 5 equipment. The test shall be conducted with power applied and with input resistance to provide an indication of 150~C. The scale errors at room temperature after vibration shall not exceed the tolerances specified in Table I.

4.4.2.8 The sampling plan A tests specified in MIL-L-27160 or MIL-L-25467, as applicable, shall be conducted.

* 4.4.3 Sampling plan B tests. Samples shall be selected in accordance with MIL-STD-105, AQL of 6.5, special inspection level S-1.

4.4.3.1 Response time. The response time shall not exceed 3 seconds.

4.4.3.2 Sampling factor. The sampling factor shall be not less than 1.6.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

TABLE I

TEST TOLERANCES

| Test Point | Test Resistance | Scale Error at Room Temperature | Reduced Voltage | Scale Error at Low Temperature | Scale Error at High Temperature | Scale Error After Vibration |
|---|---|---|---|---|---|---|
| °C | Ohms | Tol ± °C | Tol ± ° C | Tol ± ° C | Tol ± ° C | Tol ± ° C |
| -50 | 74.24 | 4.0 (4.0) | 3.0 (3.0) | 6.0 (6.0) | 6.0 (6.0) | 6.0 (6.0) |
| -30 | 80.56 | 3.0 (3.0) | 3.0 (3.0) | 5.0 (5.0) | 5.0 (5.0) | 6.0 (5.0) |
| 0 | 90.48 | 3.0 (3.0) | 3.0 (3.0) | 5.0 (5.0) | 5.0 (5.0) | 6.0 (5.0) |
| +30 | 100.01 | 3.0 (3.0) | 3.0 (3.0) | 5.0 (5.0) | 5.0 (5.0) | 6.0 (5.0) |
| 80 | 120.36 | 2.0 (2.0) | 2.0 (2.0) | 4.0 (4.0) | 4.0 (4.0) | 5.0 (4.0) |
| 120 | 137.78 | 2.0 (2.0) | 2.0 (2.0) | 4.0 (4.0) | 4.0 (4.0) | 5.0 (4.0) |
| 150 | 151.91 | 2.0 (2.0) | 2.0 (2.0) | 4.0 (4.0) | 4.0 (4.0) | 5.0 (4.0) |
| 200 | 177.95 | 4.0 (4.0) | 3.9 (3.0) | 6.0 (6.0) | 6.0 (6.0) | 6.0 (6.0) |

| Test Point | Test Resistance | Open and Short Circuit | Bulb Lead Tolerance | EXTREME TEMPERATURE EXPOSURE | | |
|---|---|---|---|---|---|---|
| | | | | Scale Error At Low Temperature | Room Temperature After Low Temperature | Room Temperature After High Temperature |
| °C | Ohms | Tol ± °C | Tol ± °C | Tol ± °C | Tol ± °C | Tol ± °C |
| -50 | 74.24 | 7.0 (5.0) | 2.0 (2.0) | 9.0 (6.0) | 7.0 (4.0) | 7.0 (4.0) |
| -30 | 80.56 | 6.0 (4.0) | 2.0 (2.0) | 8.0 (5.0) | 6.0 (3.0) | 6.0 (3.0) |
| 0 | 90.38 | 6.0 (4.0) | 2.0 (2.0) | 8.0 (5.0) | 6.0 (3.0) | 6.0 (3.0) |
| +30 | 100.91 | 6.0 (4.0) | 2.0 (2.0) | 8.0 (5.0) | 6.0 (3.0) | 6.0 (3.0) |
| 80 | 120.36 | 5.0 (3.0) | 2.0 (2.0) | 7.0 (4.0) | 5.0 (2.0) | 5.0 (2.0) |
| 120 | 137.78 | 5.0 (3.0) | 2.0 (2.0) | 7.0 (4.0) | 5.0 (2.0) | 5.0 (2.0) |
| 150 | 151.91 | 5.0 (3.0) | 2.0 (2.0) | 7.0 (4.0) | 5.0 (2.0) | 5.0 (2.0) |
| 200 | 177.95 | 7.0 (5.0) | 2.0 (2.0) | 9.0 (6.0) | 7.0 (4.0) | 7.0 (4.0) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

4.4.3.3 Power consumption. The power consumption shall not exceed 2 watts.

4.4.3.4 Bulb lead resistance. The indicator shall be connected as shown on Figure 2 and subjected to a scale error at room temperature test. The indications with bulb lead resistance shall not differ from the indications without bulb lead resistance by more than the tolerances specified in Table I.

4.4.3.5 Extreme low temperature exposure. After low temperature exposure, the scale errors at low temperature and the scale errors at room temperature shall not exceed the tolerances specified in
Table I.

4.4.3.6 High temperature exposure. After high temperature exposure, the scale errors at room temperature shall not exceed the tolerances specified in Table I.

4.4.3.7 Salt spray. The indicator shall be subjected to and shall meet the sealing test following salt spray exposure. The insulation resistance shall be a minimum of 20 megohms.

4.4.3.8 The sampling plan B tests specified in MIL-L-27160 or MIL-L-25467, as applicable, shall be conducted.

4.4.3.9 Thermal shock. No evidence of moisture penetration or damage to the enclosure shall result from this test. Following this test, the indicator shall be re subjected to and meet the test specified in 4.4.1.6. Fogging of the coverglass during any portion of this test shall be cause for rejection.

* 4.4.3.10 Reliability demonstration. The preproduction test samples shall first be subjected to the scale error test and then to cycles consisting of 4 hours of operation with power and resistance applied and 1 hour with power removed. The cycles shall be conducted at the following ambient temperatures, $\pm 2^{\circ}$C, in the sequence specified: 4 hours of 0°C, 1 hour off, 4 hours at room temperature, 1 hour off; 4 hours at 50°C, 1 hour off. During the operational portion of the cycles, the resistance shall be so varied as to produce an indication cycle corresponding to a change from -50° to $\pm 150^{\circ}$C and return to -50°C. This shall constitute 1 indication cycle-which shall be requested at a rate-of 6 $\pm 1$ cycles per minute. The continuity of this test may be interrupted for weekend shutdown. A minimum of three and a maximum of five sample indicators shall be tested by the contractor for reliability. Duration of the test and accent-reject criteria shall be as specified in MIL-STD-781, Test Plan IC. At the conclusion of this test, the indicators shall be subjected to the scale error at room temperature and the friction error tests. The scale errors at the respective test points shall not exceed 150 percent of the scale errors prior to this test, and the friction error shall not exceed 3°C. Reliability of the equipment will be verified when the indicators have passed all tests specified herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

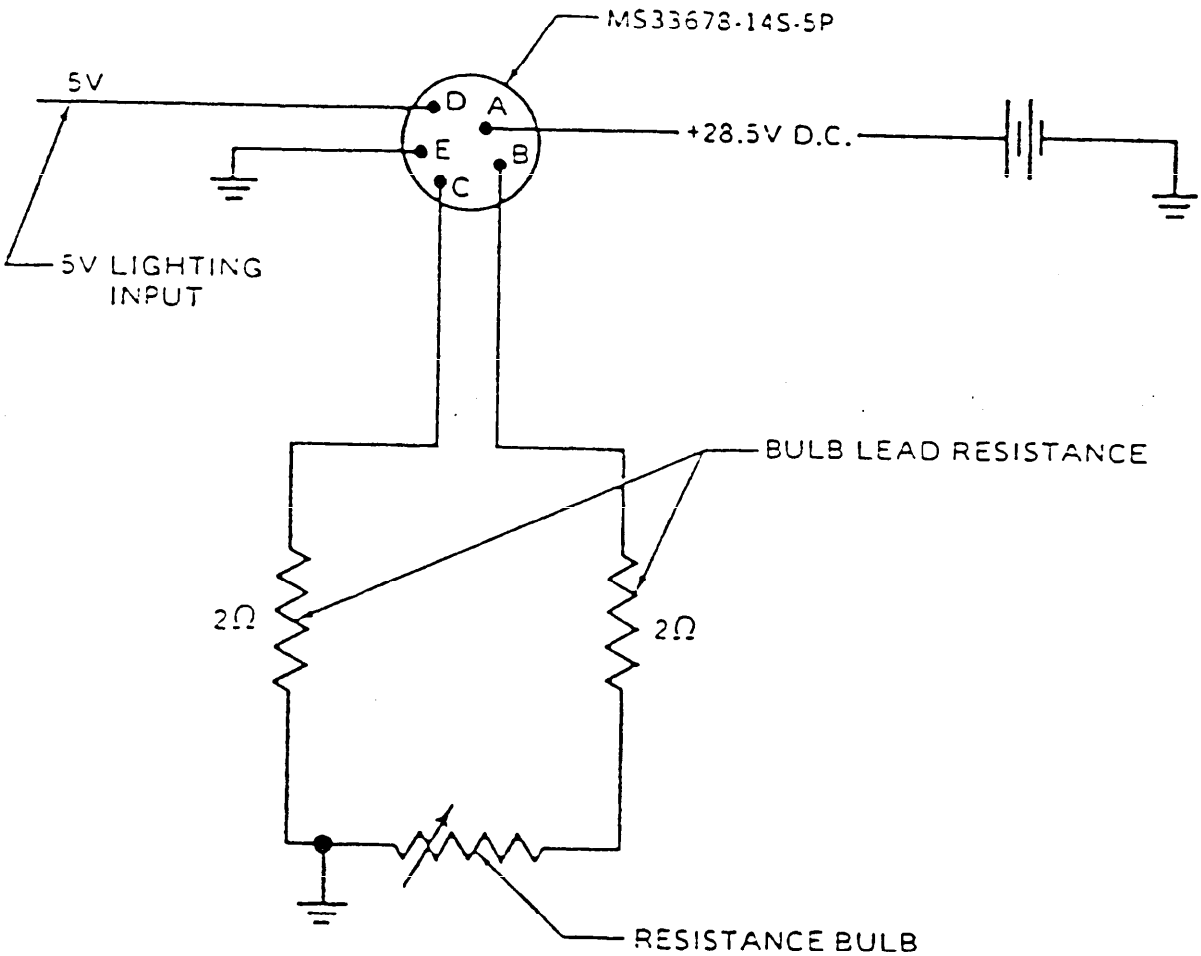



Figure 2. WIRING DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

* 5. PACKAGING

* 5.1 Preservation. Preservation shall be Level A, C, or Commercial as specified (see 6.2).

* 5.1.1 Level C. The indicator shall be preserved and packaged in a matter which will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the first receiving activity.

* 5.1.2 Commercial. The indicator shall be preserved in accordance with the applicable requirements of ASTM-D-3951.

* 5.2 Packing. Packing shall be Level A, B, C or Commercial as specified (see 6.2).

5.2.1 Commercial. The indicators that have been preserved and packaged as specified in 5.1 shall be packed in accordance with the requirements of ASTM-D-3951.

5.3 Marking

5.3.1 Level A, B and C. In addition to any special or other identification markings required by the contract (see 6.2), each unit pack and exterior container shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial. The indicators shall be marked in accordance with the applicable requirements of ASTM-D-3951.

5.4 Palletization. United loads, commensurate with the level of packing specified in the contract or order shall be palletized in accordance with MIL-STD-147. Palletized loads shall be uniform in size and quantities to the greatest extent possible. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The indicators covered by this specification are intended for use in indicating temperatures, such as constant speed drive oil temperatures, ranging from -50° to +200°C. The indicators may be used on instrument panels by application of an MS28042-1 instrument mounting clamp.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification
b. Type of indicator required (see 1.2)
c. First article (see 3.1)
d. Level of packaging and packing desired.
e. Whether sampling plan B tests are to be conducted.
f. When palletization is required (see 5.4)

6.3 Definitions. Definitions will be as specified in MIL-I-7070.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the indicator(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production item, a standard production item from the contractor's current inventory (see 3.1), and the number of items to be tested as specified in 4.1. The contracting officer would also include specific instructions in acquisition documents regarding arrangement for examinations, approved of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the bidders offering a product which has been previously acquired or tested by the Government and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.5.1 Subject term (key word) listing:

Aircraft Temperature Gage
Integrally Lighted Indicator
Oil Temperature Gage
Temperature Gage

Custodian:
Air Force - 99

Preparing activity:
Air Force - 82

Project No. 6685 - F864



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | MIL-I-27674C (USAF) | |

3. DOCUMENT TITLE

INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE (Include Area Code)<br>(1) Commercial | (2) AUTOVON |
|---|---|---|
| SA-ALC/TILDD | (210) 925-6314 | 945-6314 |
| c. ADDRESS (Include Zip Code)<br>485 Quentin Roosevelt Road<br>Kelly AFB, TX 78241-6425 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:40Z
Check the source to verify that this is the current version before use.