MIL-C-55422/1
23 February 1965

MILITARY SPECIFICATION SHEET

CLIP, ELECTRICAL, GRID

The complete requirements for procuring the clip described herein shall consist of this document and the issue in effect of Specification MIL-C- .

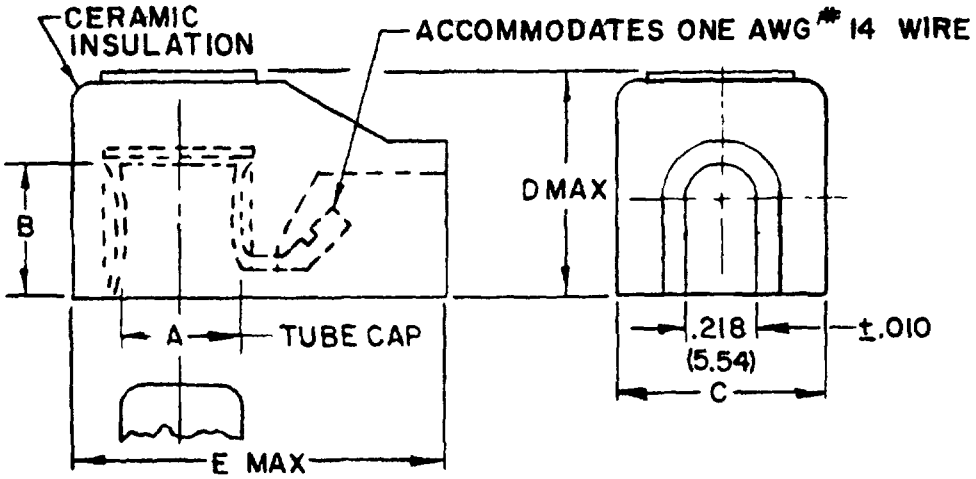

NOTES.
1. Dimensions are in inches.
2. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
3. Material - beryllium-copper alloy. Finish - tin plate.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Millimeters are in parentheses.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Retaining and release force: 5 lbs. minimum; 15 lbs. maximum.

Finish: Electrodeposited tin-plate.

Part number: Consists of the letter "M" followed by the basic number of this specification sheet and a dash number as follows:

Example:

M------/1-01

Spec sheet number — Dash number

Table I

Dash no.	Dimensions (see figure)					Retaining and release force	
	A±.005 (.13)	B	C±.010 (.25)	D Max	E±.010 (.25)	Lbs Max	Lbs Min
-01	.250 (6.35)	.301±.005 (7.65±.13)	.625 (15.88)	.575 (14.61)	1.125 (28.58)	16.7	5
-02	.360 (9.14)	.383±.030 (9.73±.76)	.641 (16.28)	.575 (14.61)	1.141 (28.98)	16.7	5
-03	.566 (14.38)	.500+.015 (12.70+.38)	.828 (21.03)	.807 (20.51)	1.484 (37.69)	53.5	6.67

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army -
Navy -
Air Force -

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Army - EL

Project No. 5940-0275

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:21Z
Check the source to verify that this is the current version before use.