
MILITARY SPECIFICATION SHEET

TERMINALS, FEEDTHRU (INSULATED),

STYLE FT02

The complete requirements for procuring the terminals described herein shall consist of this document and the latest issue of Specification MIL-T-55155.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

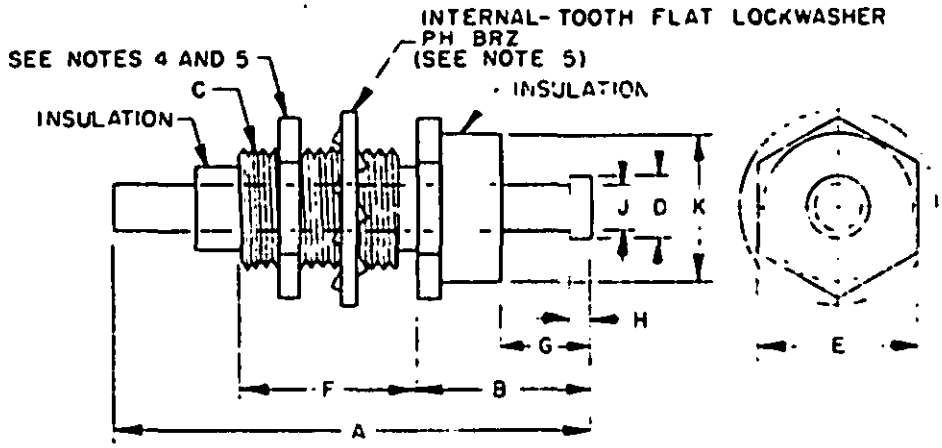

INCHES	MM
.031	.79
.062	1.57
.082	2.08
.163	4.14
.188	4.78
.225	5.72
.250	6.35
.287	7.29
.690	17.53

Type designation	Dimensions									
	A	B	C	D	E	F	G	H	J	K
FT02-A01	.690	.287	12-28 UNF-2A	.082	.250	.225	.163	.031	.062	.188

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerance is ±.015(.38 mm).
4. Hex nut, brass, No. 12-28 UNF-2B.
5. The washer and the hex nut shall be plated with the same finish as that on the mounting base.
6. Drawing depicts general design characteristics and is not intended to limit specific manufacturing processes.
7. Dash in type designation allows for different insulation colors in accordance with MIL-T-55155.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Insulation material: Polytetrafluoroethylene.

Dielectric withstanding voltage:

	Volts ac (rms) (min)
At atmospheric pressure	2,000
At reduced barometric pressure	650

Pull: 5 pounds, min.

Torque: 2 ounce-inches, min.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI, MU, SL, WC
Navy -
Air Force - 11, 80
DSA - GS

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS, SH, YD
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0638)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-160/3343

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.